


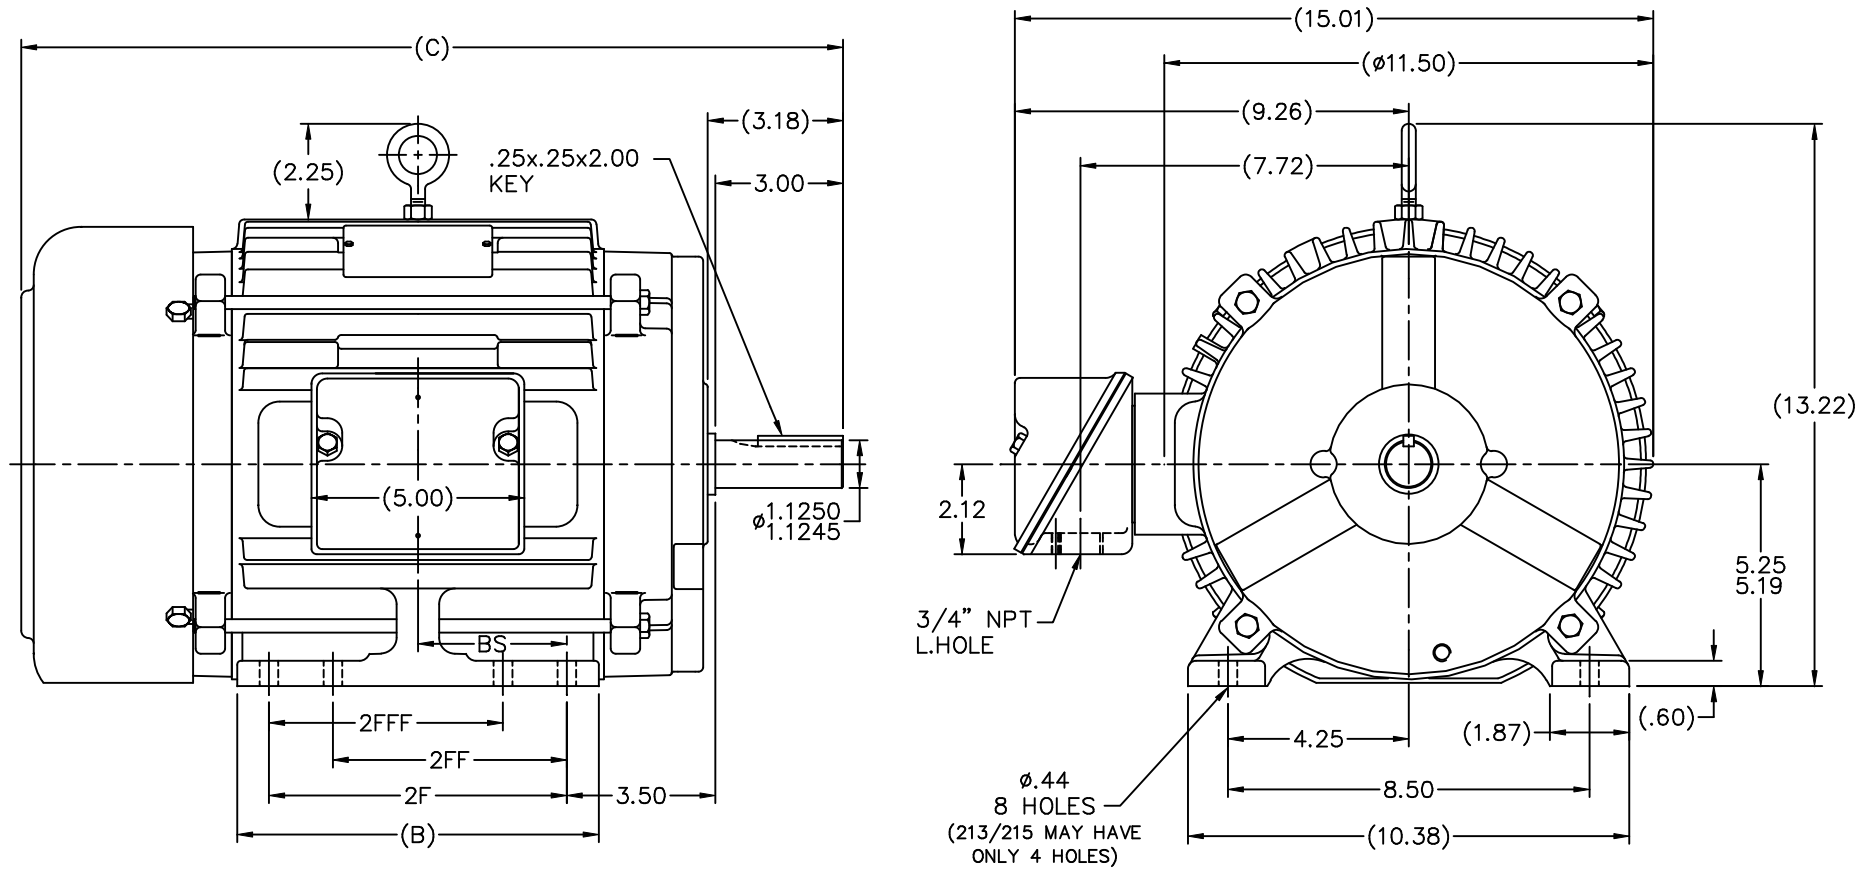

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

DASH	FRAME	B	C	2F	2FF	2FFF	BS
725	213U	7.00	17.82	5.50	—	—	2.75
875	215U	8.50	19.32	7.00	—	—	3.50
875	213/5U	8.50	19.32	7.00	5.50	5.50	3.50
1000	213U	9.75	20.57	8.25	5.50	5.50	4.12
1000	215U	9.75	20.57	8.25	7.00	7.00	4.12

						TOLERANCES UNLESS SPECIFIED		DRAWN DAH 05-08-2001		
						DEC. INCHES		CHK ML 05-08-2001		
						.X ±.1		APPD DR 05-08-2001		
2	REDRAWN IN AUTOCAD	TAT 05-19-2005	ML	.XX ±.03	TITLE OUTLINE 210U FR. - TEFC - STEEL C' BOX			SCALE 11=32		
1	NEW DRAWING MU36629	DAH 05-08-2001		.XXX ±.005				REF		
				.XXXX ±.0005	MAT'L			FMF		
NO.	REVISION	BY & DATE	CHK	ANG ±730"	FINISH			PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE ss88189			SIZE B	DRAWING NO. SS88189	PAGE 2 OF 2
				DIST LB						