



PE284T-25-4C

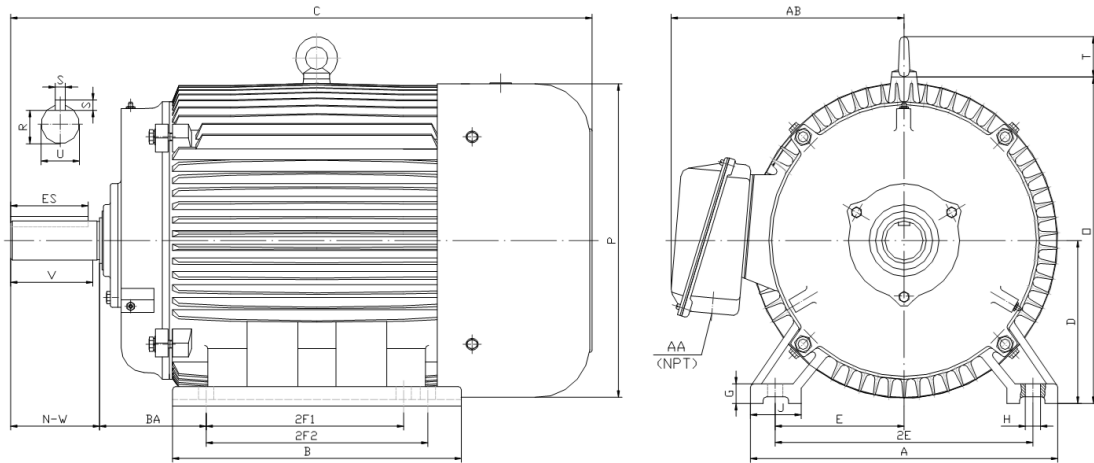
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
25	1800	284T	14.00	11.70	26.60	7.00	0.85	0.53	2.75	5.50	11.00	9.50	0.00	14.50	14.00	2.20	4.75

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
1.875	4.38	1.591	0.500	3.28	4.62	1.50	11.30	6311	6311	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE284T-25-4C

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
25	1775	284T	208-230/460	60	1.15	F	C	1.4	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6311	6311	12 Lead 2Δ/Δ	364
30.0	182	93.6	93.6	93.0	92.4	0.840	0.810	0.720	74.3	200	255				

NAME PLATE

 North American Electric, Inc.													
INVERTER DUTY 20:1 VT; 10:1 CT													
CONNECTION DIAGRAMS													
208-230V													
CAT NO: PE284T-25-4C				FRAME 284T				PHASE 3					
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55			
HP 25		RPM 1775		HP 25		RPM 1465		DUTY CONT		DES C			
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C		INS F			
FLA 65 - 60 / 30				FLA 72/36				DE BEARING 6311					
CODE G		P.F. 0.84		CODE F		P.F. 0.86		ODE BEARING 6311					
EFF 93.6		MIN 92.4		EFF 92.3		MIN 91.1		LUB: Mobil Polyrex EM					
MOTOR WEIGHT 364 LBS				CONNECTION 12 Lead 2Δ/Δ				SER NO					
General purpose use on industrial machinery installed in damp, dusty or dirty environments.													
Hernando, Mississippi													
												CC 082A	

		
460V		
		

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.