

PE284TSC-25-2

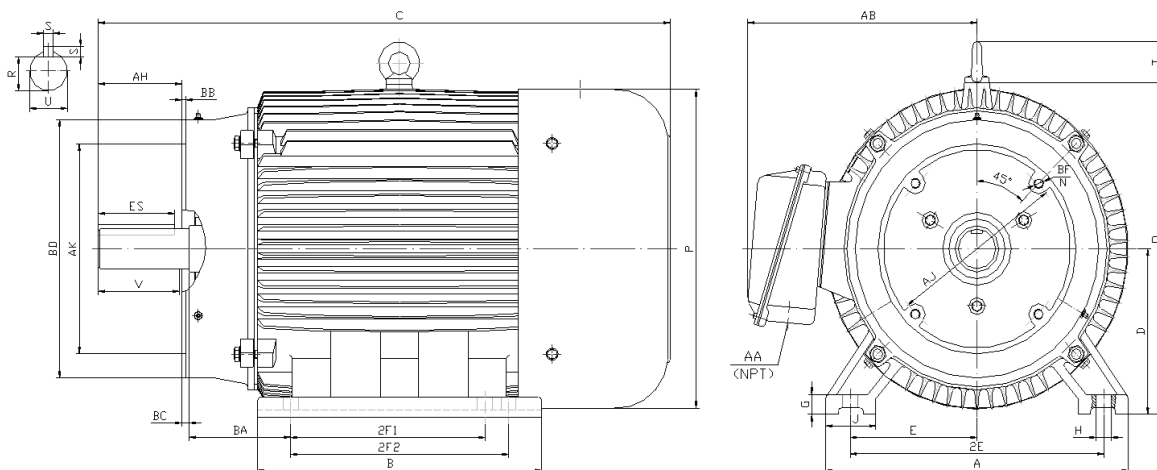
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
25	3600	284TSC	14.00	11.70	25.20	7.00	0.85	0.53	2.75	5.50	11.00	9.50	0.00	14.50	14.00	2.20	4.75

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.00	9.00	10.50	0.25	0.25	11.25	4*1/2-13	1.63	3.00	1.42	0.38	1.91	NA	1.50	11.30	6311	6311	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE284TSC-25-2

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
25	3540	284TSC	208-230/460	60	1.15	F	B	1.7	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
28.5	182.0	91.7	91.2	90.0	90.2	0.900	0.870	0.810	37.2	150	240	6311	6311	12 Lead 2Δ/Δ	393

NAME PLATE

 North American Electric, Inc.														CONNECTION DIAGRAMS 208-230V 											
INVERTER DUTY 20:1 VT; 10:1 CT																									
CAT NO: PE284TSC-25-2				FRAME 284TSC				PHASE 3				460V 													
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55															
HP 25		RPM 3540		HP 25		RPM 2930		DUTY CONT		DES B															
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C		INS F															
FLA 61 - 57 / 28.5				FLA 69/34.5				DE BEARING 6311																	
CODE G		P.F. 0.90		CODE F		P.F. 0.91		ODE BEARING 6311																	
EFF 91.7		MIN 90.2		EFF 90		MIN 88.5		LUB: Mobil Polyrex EM																	
MOTOR WEIGHT 393 LBS				CONNECTION 12 Lead 2Δ/Δ				SER NO																	
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi														ISO9001 CERTIFIED			CE			SP US			CC 082A		

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.