

PE284TSC-25-4

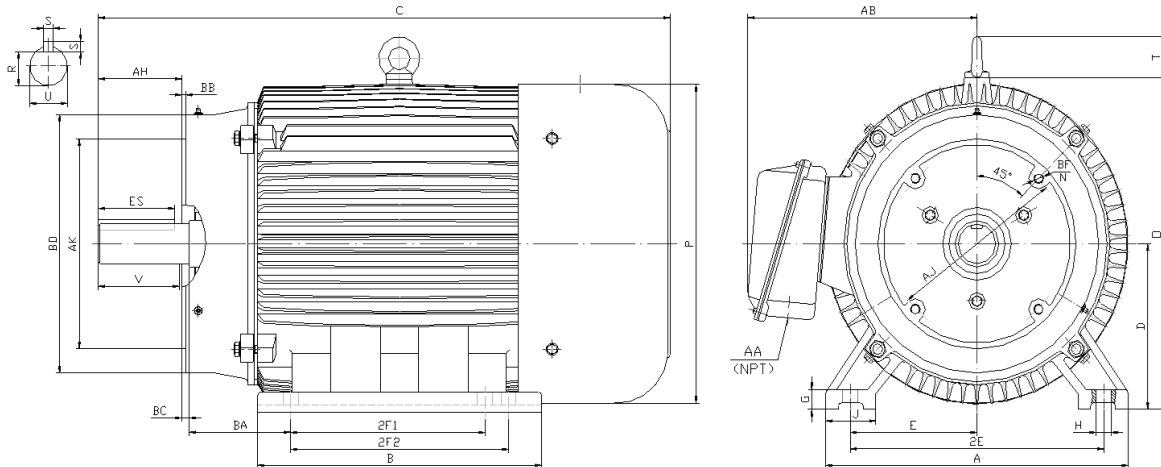
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
25	1800	284TSC	14.00	11.70	25.20	7.00	0.85	0.53	2.75	5.50	11.00	9.50	0.00	14.50	14.00	2.20	4.75

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.00	9.00	10.50	0.25	0.25	11.25	4*1/2-13	1.63	3.00	1.42	0.38	1.91	NA	1.50	11.30	6311	6311	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE284TSC-25-4

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
25	1775	284TSC	208-230/460	60	1.15	F	B	1.4	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
30.0	182.0	93.6	93.6	93.0	92.4	0.840	0.810	0.720	74.3	160	255	6311	6311	12 Lead 2Δ/Δ	396

NAME PLATE

 North American Electric, Inc.													CONNECTION DIAGRAMS								
INVERTER DUTY 20:1 VT; 10:1 CT										208-230V											
CAT NO: PE284TSC-25-4				FRAME 284TSC				PHASE 3													
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55											
HP 25		RPM 1775		HP 25		RPM 1465		DUTY CONT		DES B											
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C				INS F									
FLA 65 - 60 / 30				FLA 72/36				DE BEARING 6311													
CODE G		P.F. 0.84		CODE F		P.F. 0.86		ODE BEARING 6311													
EFF 93.6		MIN 92.4		EFF 92.3		MIN 91.1		LUB: Mobil Polyrex EM													
MOTOR WEIGHT 396 LBS				CONNECTION 12 Lead 2Δ/Δ				SER NO													
General purpose use on industrial machinery installed in damp, dusty or dirty environments.																			CC 082A		
Hernando, Mississippi																					
										460V											
																					

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.