



PE324T-40-4-575V


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

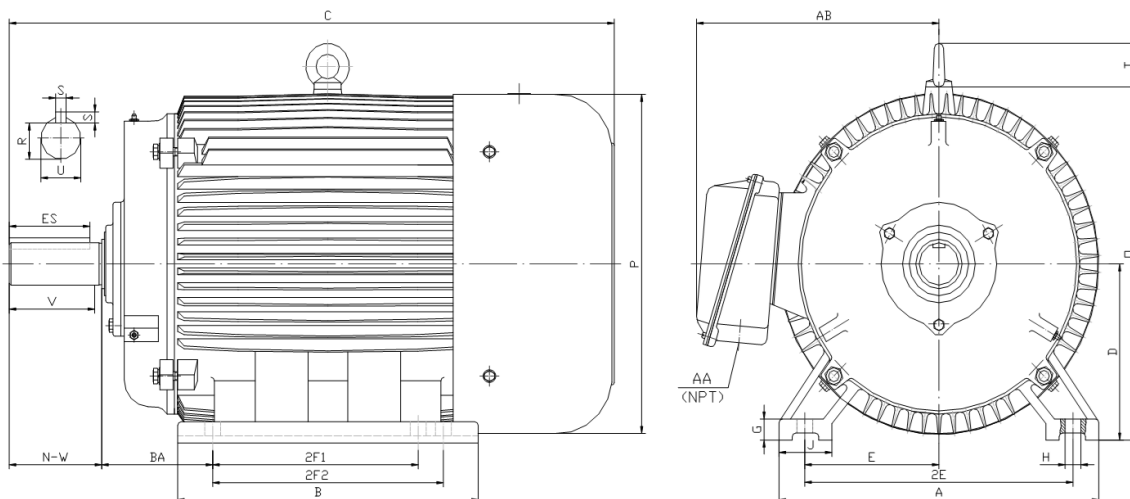

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
40	1800	324T	15.50	13.20	29.80	8.00	1.00	0.66	2.75	6.25	12.50	10.50	0.00	15.90	15.70	2.60	5.25

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
2.13	5.00	1.85	0.50	3.91	5.25	2.00	12.30	6312	6312	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE324T-40-4-575V

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
40	1780	324T	575	60	1.15	F	B	1.1	G	TEFC	55	40° C

Amps (575V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
37.3	232	94.1	94.6	94.6	93.0	0.830	0.790	0.700	118.8	160	245	6312	6312	6 Lead Δ	519

NAME PLATE

 North American Electric, Inc.								CONNECTION DIAGRAM		
INVERTER DUTY 20:1 VT; 10:1 CT										
CAT NO:		PE324T-40-4-575V		HP	40	Hz	60	PHASE	3	
VOLTS		575		FLA	37.3		IP RATING		55	
RPM		1780		POWER FACTOR		0.83		DESIGN		B
FRAME		324T		NEMA NOM EFF		94.1		CODE		G
DRIVE END BEARING		6312		NEMA MIN EFF		93.0		S.F.		1.15
OPP DRIVE END BEARING		6312		MAX AMB		40° C		INS CLASS		F
ENCL		TEFC		RATING		CONT		SER		
MOTOR WEIGHT		519 LBS		CONNECTION		6 Lead Δ		LUB:		Mobil Polyrex EM
General purpose use on industrial machinery installed in damp, dusty or dirty environments. Hernando, Mississippi										
										

575 V Delta


L1


L2


L3

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.