

PE324TC-25-6C

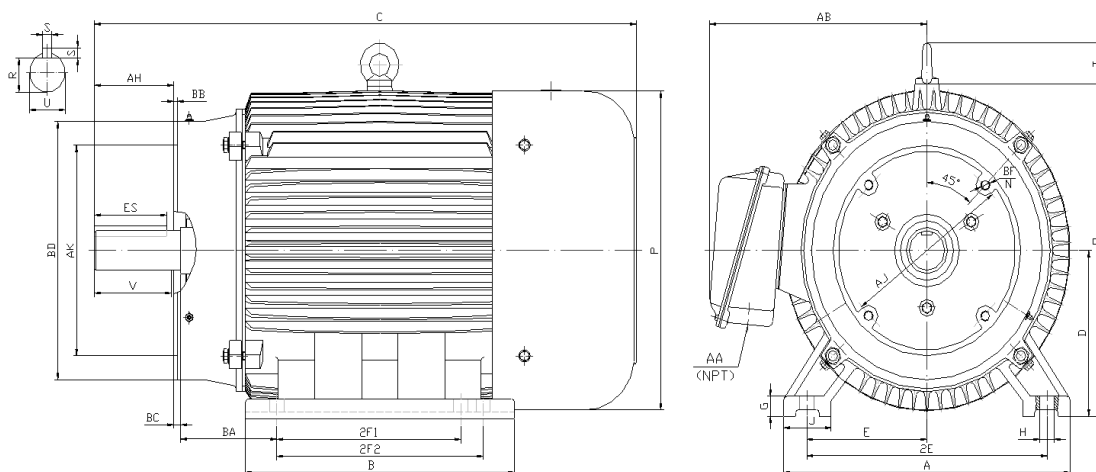
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
25	1200	324TC	15.50	13.20	29.80	8.00	1.00	0.66	2.75	6.25	12.50	10.50	0.00	15.90	15.70	2.60	5.25

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
5.00	11	12.50	0.25	0.25	14.00	4*5/8-11	2.125	5	1.845	0.5	3.91	NA	2.00	12.30	6312	6312	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE324TC-25-6C

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
25	1185	324TC	208-230/460	60	1.15	F	C	1.3	G	TEFC	55	40° C

Amps (460V)			Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA		100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
30.5	182.0		93.0	93.0	93.0	91.7	0.780	0.730	0.620	111.3	200	255	6312	6312	12 Lead 2Δ/Δ	477

NAME PLATE

 North American Electric, Inc. 										CONNECTION DIAGRAMS 208-230V  460V 
CAT NO: PE324TC-25-6C			FRAME 324TC			PHASE 3				
HZ 60	S.F. 1.15	HZ 50	S.F. 1.0	ENCL TEFC	IP 55					
HP 25	RPM 1185	HP 25	RPM 980	DUTY CONT	DES C					
VOLTS 208-230/460			VOLTS 190/380			AMB 40° C	INS F			
FLA 67 - 61 / 30.5			FLA 78/39			DE BEARING 6312				
CODE G	P.F. 0.78	CODE F	P.F. 0.80	ODE BEARING 6312						
EFF 93.0	MIN 91.7	EFF 91	MIN 89.7	LUB: Mobil Polyrex EM						
MOTOR WEIGHT 477 LBS			CONNECTION 12 Lead 2Δ/Δ			SER NO				
General purpose use on industrial machinery installed in damp, dusty or dirty environments.    CC 082A Hernando, Mississippi										

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.