

PE326TSC-50-2

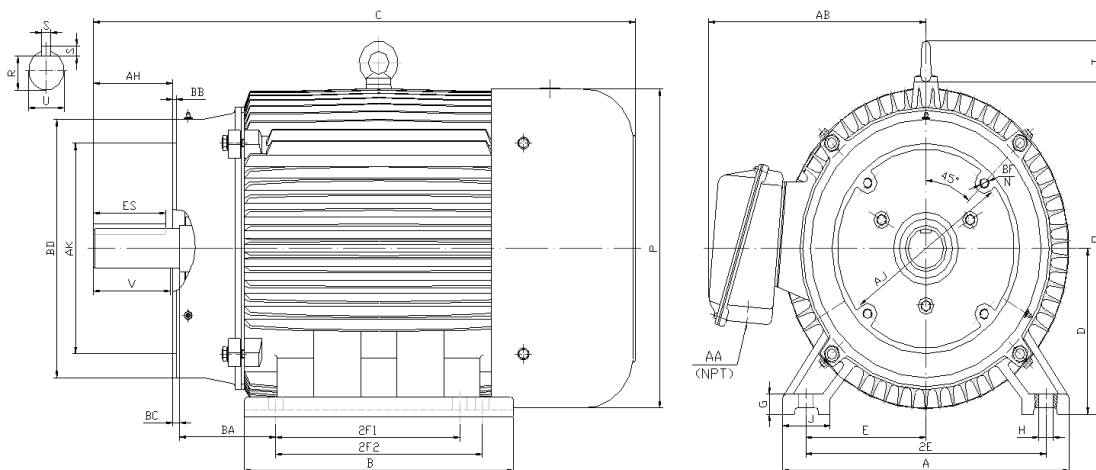
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
50	3600	326TSC	15.50	14.70	29.80	8.00	1.00	0.66	2.75	6.25	12.50	10.50	12.00	15.90	15.70	2.60	5.25

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.50	11.00	12.50	0.25	0.25	14.00	4*5/8-11	1.88	3.50	1.59	0.50	2.03	NA	2.00	12.30	6312	6312	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE326TSC-50-2

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
50	3545	326TSC	208-230/460	60	1.15	F	B	1.5	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)					Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.		100%	75%	50%	FLT	LRT %	BDT %				
58.1	362.0	93.0	92.1	91.4	91.7		0.910	0.880	0.810	73.9	140	250	6312	6312	12 Lead 2Δ/Δ	586

NAME PLATE

 North American Electric, Inc.										NEMA Premium		CONNECTION DIAGRAMS				
INVERTER DUTY 20:1 VT; 10:1 CT										208-230V						
CAT NO:		PE326TSC-50-2				FRAME		326TSC		PHASE		3				
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55						
HP 50		RPM 3545		HP 50		RPM 2930		DUTY CONT		DES B						
VOLTS		208-230/460				VOLTS		190/380		AMB 40° C		INS F				
FLA 124 - 116.2 / 58.1						FLA		134/67		DE BEARING		6312				
CODE G		P.F. 0.91		CODE F		P.F. 0.92		ODE BEARING		6312						
EFF 93.0		MIN 91.7		EFF 91.3		MIN 90		LUB:		Mobil Polyrex EM						
MOTOR WEIGHT		586 LBS		CONNECTION		12 Lead 2Δ/Δ		SER NO								
General purpose use on industrial machinery installed in damp, dusty or dirty environments.										460V						
																
Hernando, Mississippi																
										CC 082A						

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.