

PE326TSC-50-4

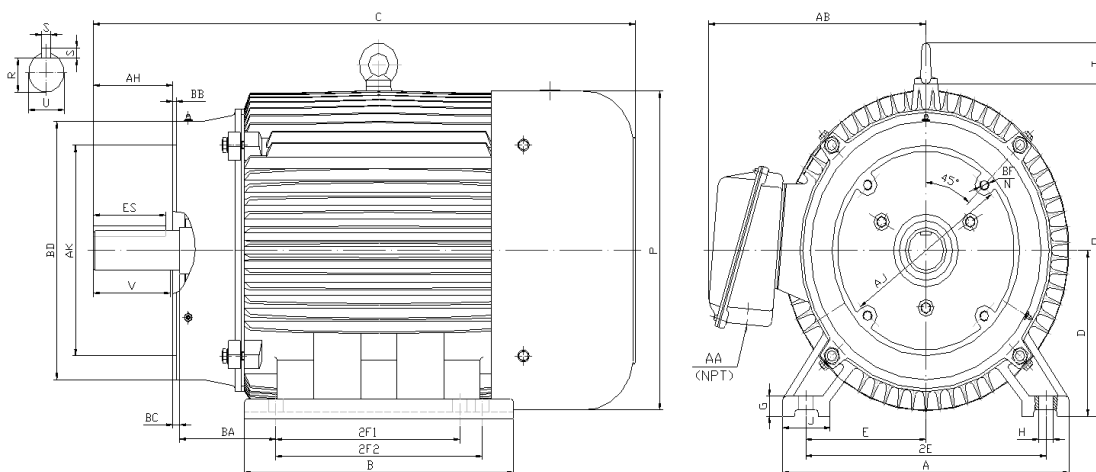
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
50	1800	326TSC	15.50	14.70	29.80	8.00	1.00	0.66	2.75	6.25	12.50	10.50	12.00	15.90	15.70	2.60	5.25

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.50	11.00	12.50	0.25	0.25	14.00	4*5/8-11	1.88	3.50	1.59	0.50	2.03	NA	2.00	12.30	6312	6312	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE326TSC-50-4

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
50	1780	326TSC	208-230/460	60	1.15	F	B	1.1	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6312	6312	12 Lead 2Δ/Δ	626
58.3	362.0	94.5	94.5	94.6	93.6	0.830	0.790	0.700	148.4	160	255				

NAME PLATE

 North American Electric, Inc.											
INVERTER DUTY 20:1 VT; 10:1 CT											
CAT NO: PE326TSC-50-4				FRAME 326TSC				PHASE 3			
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55	
HP 50		RPM 1780		HP 50		RPM 1475		DUTY CONT		DES B	
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C		INS F	
FLA 124 - 116.6 / 58.3				FLA 143/71.5				DE BEARING 6312			
CODE G		P.F. 0.83		CODE F		P.F. 0.85		ODE BEARING 6312			
EFF 94.5		MIN 93.6		EFF 93		MIN 91.8		LUB: Mobil Polyrex EM			
MOTOR WEIGHT 626 LBS				CONNECTION 12 Lead 2Δ/Δ				SER NO			
General purpose use on industrial machinery installed in damp, dusty or dirty environments.											
Hernando, Mississippi											
ISO9001 CERTIFIED				CE		SP US		CC 082A			
											
											

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.