

PE364TC-40-6C


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

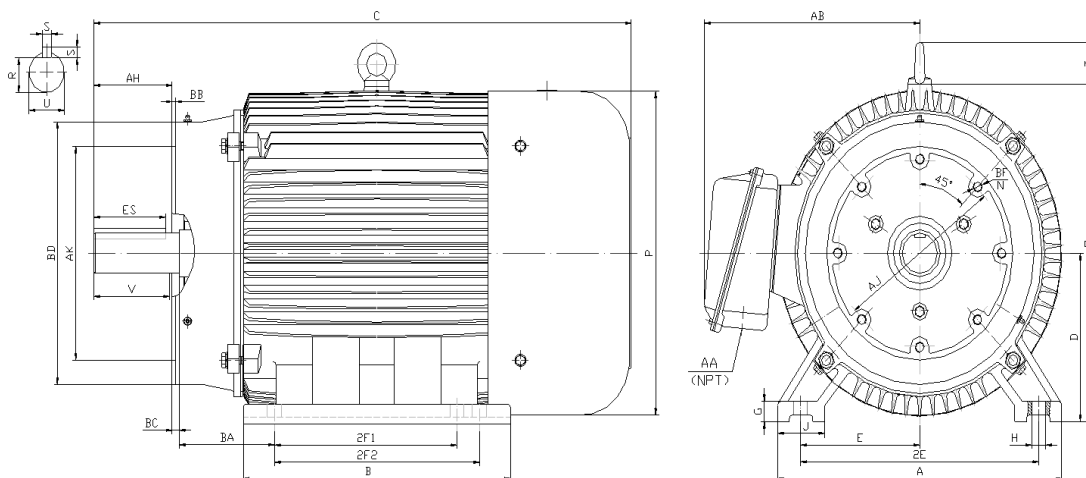

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
40	1200	364TC	17.10	14.40	32.50	9.00	1.15	0.66	2.95	7.00	14.00	11.25	0.00	18.50	18.40	2.60	5.88

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
5.62	11	12.50	0.25	0.25	14.00	8*5/8-11	2.375	5.62	2.021	0.625	4.28	NA	3.00	15.00	6313	6313	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE364TC-40-6C

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31


Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
40	1188	364TC	208-230/460	60	1.15	F	C	1.0	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
50.0	290.0	94.1	94.1	93.6	93.0	0.780	0.750	0.660	178.08	200	260	6313	6313	12 Lead 2Δ/Δ	740

NAME PLATE

North American Electric, Inc. 										CONNECTION DIAGRAMS 208-230V 
CAT NO: PE364TC-40-6C			FRAME 364TC			PHASE 3				
HZ 60	S.F. 1.15	HZ 50	S.F. 1.0	ENCL TEFC	IP 55					
HP 40	RPM 1188	HP 40	RPM 985	DUTY CONT	DES C					
VOLTS 208-230/460			VOLTS 190/380		AMB 40° C		INS F			
FLA 110 - 100 / 50			FLA 122/61		DE BEARING 6313					
CODE G	P.F. 0.78	CODE F	P.F. 0.80	ODE BEARING 6313						
EFF 94.1	MIN 93.0	EFF 92.4	MIN 91.3	LUB: Mobil Polyrex EM						
MOTOR WEIGHT 740 LBS			CONNECTION 12 Lead 2Δ/Δ			SER NO				
General purpose use on industrial machinery installed in damp, dusty or dirty environments.  CC 082A Hernando, Mississippi										

460V		
		
		
		
		
L1	L2	L3

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.