

PE364TC-60-4

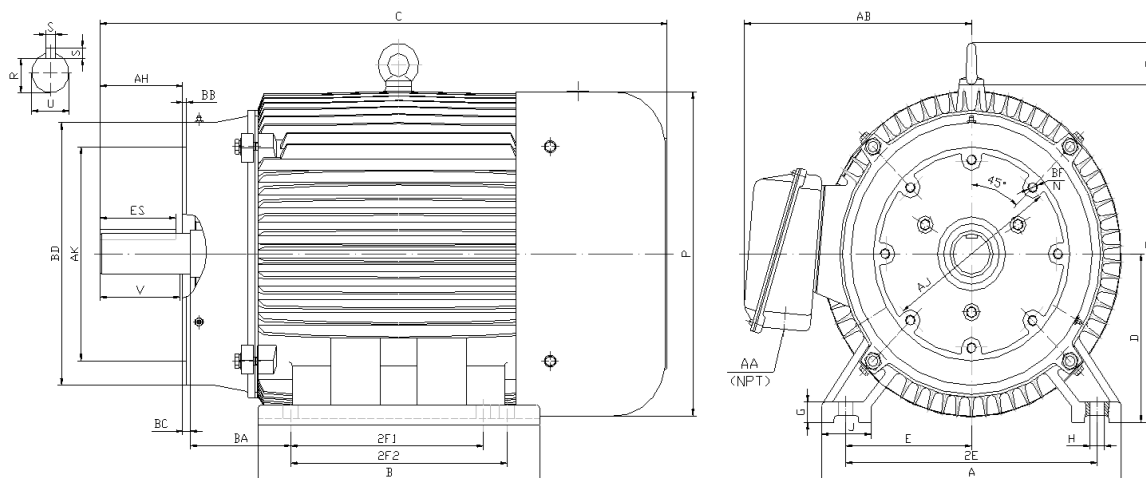
GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G



DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
60	1800	364TC	17.10	14.40	32.50	9.00	1.15	0.66	2.95	7.00	14.00	11.25	0.00	18.50	18.40	2.60	5.88

FLANGE							Shaft Extension, Key Set						Conduit Box		Bearings		Mount
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W	AA	AB	DE	ODE	
5.62	11.00	12.50	0.25	0.25	14.00	8*5/8-11	2.38	5.62	2.02	0.63	4.28	NA	3.00	15.00	6313	6313	

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP



PE364TC-60-4

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

THREE PHASE, TOTALLY ENCLOSED FAN COOLED - C-FLANGE W/ FEET

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
60	1780	364TC	208-230/460	60	1.15	F	B	1.1	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
69.5	435.0	95.0	95.0	95.0	94.1	0.850	0.830	0.750	177.6	160	240	6313	6313	12 Lead 2Δ/Δ	800

NAME PLATE

 North American Electric, Inc.															CONNECTION DIAGRAMS 208-230V 														
INVERTER DUTY 20:1 VT; 10:1 CT																													
CAT NO: PE364TC-60-4					FRAME 364TC					PHASE 3					460V 														
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55																			
HP 60		RPM 1780		HP 60		RPM 1480		DUTY CONT		DES B																			
VOLTS 208-230/460		VOLTS 190/380					AMB 40° C		INS F																				
FLA 154 - 139 / 69.5		FLA 168/84					DE BEARING 6313																						
CODE G		P.F. 0.85		CODE F		P.F. 0.86		ODE BEARING 6313																					
EFF 95.0		MIN 94.1		EFF 93.8		MIN 92.6		LUB: Mobil Polyrex EM																					
MOTOR WEIGHT 800 LBS					CONNECTION 12 Lead 2Δ/Δ					SER NO																			
General purpose use on industrial machinery installed in damp, dusty or dirty environments.																									CC 082A				
Hernando, Mississippi																													

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.