

PE444T-125-4


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

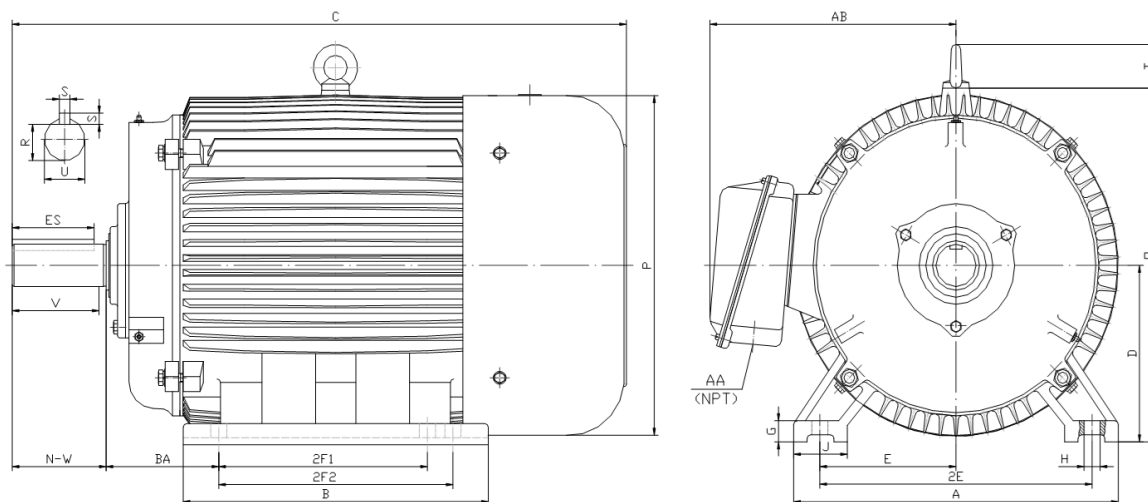

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
125	1800	444T	21.70	22.90	44.30	11.00	1.35	0.81	3.35	9.00	18.00	14.50	16.50	22.10	21.60	3.00	7.50

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.375	8.25	2.880	0.875	6.91	8.50	3.00	19.00	NU319	6318	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE444T-125-4

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
125	1785	444T	460	60	1.15	F	B	0.8	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	NU319	6318	6 Lead Δ	1471
145.0	907	95.4	95.4	95.0	94.5	0.870	0.860	0.810	368.9	150	250				

NAME PLATE

 North American Electric, Inc.  INVERTER DUTY 20:1 VT; 10:1 CT										CONNECTION DIAGRAMS (460V)							
CAT NO: PE444T-125-4										FRAME 444T		PHASE 3		Across The Line T7 T1 L1 T8 T2 L2 T9 T3 L3			
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55							
HP 125		RPM 1785		HP 125		RPM 1485		DUTY CONT		DES B							
VOLTS 460			VOLTS 380			AMB 40° C			INS F								
FLA 145.0			FLA 170			DE BEARING			NU319								
CODE G		P.F. 0.87		CODE F		P.F. 0.88		ODE BEARING		6318							
EFF 95.4		MIN 94.5		EFF 94.2		MIN 93.3		LUB:		Mobil Polyrex EM							
MOTOR WEIGHT 1471.0 LBS			CONNECTION 6 Lead Δ				SER NO										
General purpose use on industrial machinery installed in damp, dusty or dirty environments.										ISO9001 CERTIFIED		CE		C SP® US		CC 082A	
Hernando, Mississippi																	
														PWS Run T7 T1 L1 T8 T2 L2 T9 T3 L3			

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.