

PE447T-200-4C


CRUSHER DUTY ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

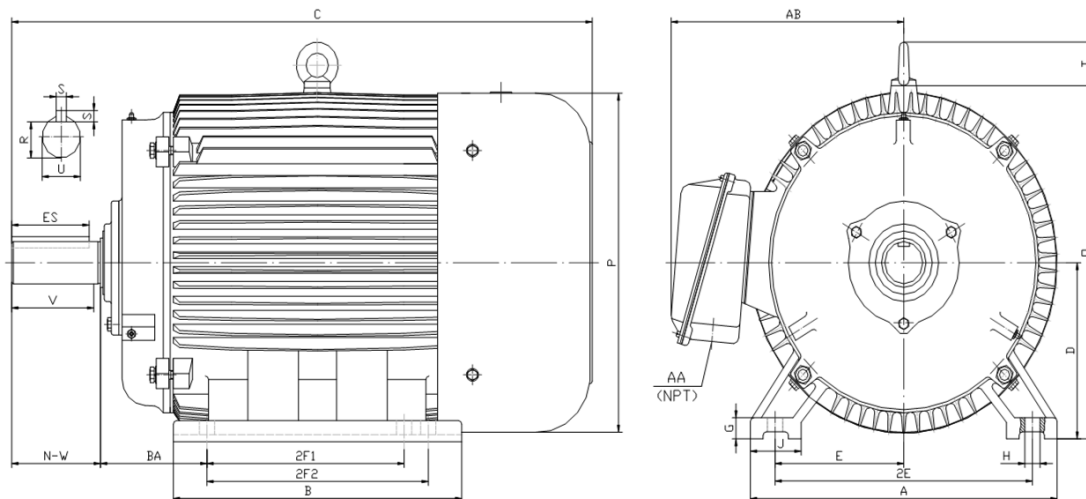

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
200	1800	447T	21.70	26.40	47.80	11.00	1.35	0.81	3.35	9.00	18.00	16.50	20.00	23.00	23.40	3.00	7.50

Shaft Extension, Key Set						Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W	AA	AB	DE	ODE	
3.375	8.25	2.880	0.875	6.91	8.50	3.00	19.90	NU319	6318	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE447T-200-4C

CRUSHER DUTY ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
200	1790	447T	460	60	1.15	F	C	0.6	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	NU319	6318	6 Lead Δ	1850
220.0	1450	96.2	96.0	95.3	95.4	0.870	0.860	0.800	590.3	200	240				

NAME PLATE

 North American Electric, Inc. 												CONNECTION DIAGRAMS (460V)	
INVERTER DUTY 20:1 VT; 10:1 CT												Across The Line T7 T1 L1 T8 T2 L2 T9 T3 L3	
CAT NO: PE447T-200-4C				FRAME 447T				PHASE 3					
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55			
HP 200		RPM 1790		HP 200		RPM 1488		DUTY CONT		DES C			
VOLTS 460				VOLTS 380				AMB 40° C		INS F			
FLA 220.0				FLA 270				DE BEARING NU319					
CODE G		P.F. 0.87		CODE F		P.F. 0.88		ODE BEARING 6318					
EFF 96.2		MIN 95.4		EFF 95		MIN 94.2		LUB: Mobil Polyrex EM					
MOTOR WEIGHT 1850.0 LBS				CONNECTION 6 Lead Δ				SER NO					
General purpose use on industrial machinery installed in damp, dusty or dirty environments.    CC 082A Hernando, Mississippi												PWS Start T7 T1 L1 T8 T2 L2 T9 T3 L3	
PWS Run T7 T1 L1 T8 T2 L2 T9 T3 L3													

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.