



PE449TS-250-2-IN


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

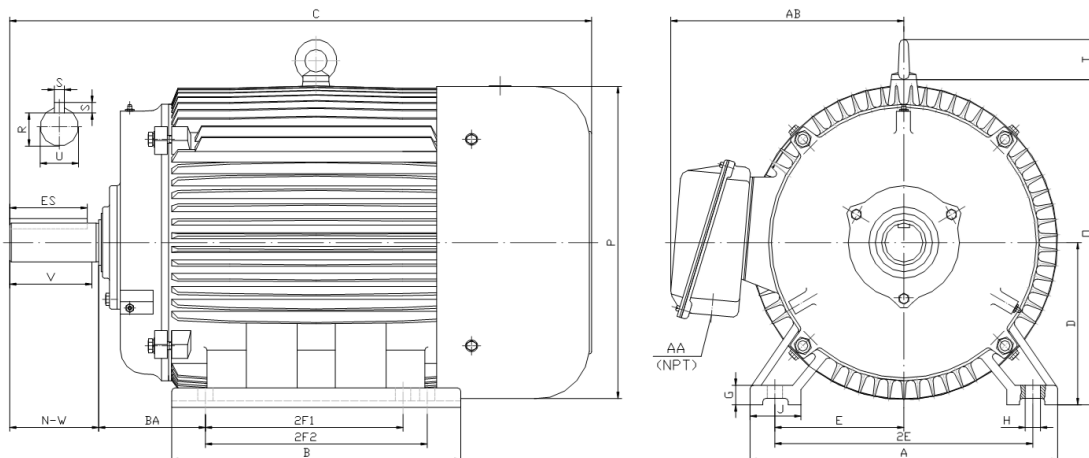

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
250	3600	449TS	21.70	31.40	49.10	11.00	1.35	0.81	3.35	9.00	18.00	20.00	25.00	23.00	23.40	3.00	7.50

Shaft Extension, Key Set							Conduit Box		Bearings		Mount
U	V	R	S	ES	N-W		AA	AB	DE	ODE	
2.375	4.50	2.021	0.625	3.03	4.75		3.00	19.90	6314	6314/C3 VL0241	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease. It is recommended that you add some additional lubrication when the motor is installed.

Three options (brands) for suitable lubrication include, but are not limited to, the following:

- 1.) Mobil Polyrex EM
- 2.) Citco Polyurea MP
- 3.) Conoco Phillips Polytac EP





PE449TS-250-2-IN

GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

Factory Certified for T2B Class I, Division II, Groups A,B,C & D and Class II, Division II, Groups F & G

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
250	3580	449TS	460	60	1.15	F	B	0.6	G	TEFC	55	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %				
266.0	1825	95.8	95.8	95.1	95.0	0.910	0.900	0.880	367.4	130	240	6314	6314/C3VL0241	6 Lead Δ	1954

NAME PLATE

 North American Electric, Inc.										NEMA Premium			CONNECTION DIAGRAMS (460V)		
INVERTER DUTY 20:1 VT; 10:1 CT															
CAT NO: PE449TS-250-2-IN				FRAME 449TS				PHASE 3				Across The Line T7 T1 L1 T8 T2 L2 T9 T3 L3			
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 55					
HP 250		RPM 3580		HP 250		RPM 2980		DUTY CONT		DES B					
VOLTS 460				VOLTS 380				AMB 40° C		INS F					
FLA 266				FLA 326				DE BEARING 6314							
CODE G		P.F. 0.91		CODE F		P.F. 0.92		ODE BEARING 6314/C3VL0241							
EFF 95.8		MIN 95.0		EFF 94.3		MIN 93.5		LUB: Mobil Polyrex EM							
MOTOR WEIGHT 1954 LBS				CONNECTION 6 Lead Δ				SER NO							
General purpose use on industrial machinery installed in damp, dusty or dirty environments.    CC 082A Hernando, Mississippi															

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.