

PESS182TC1.5M-6

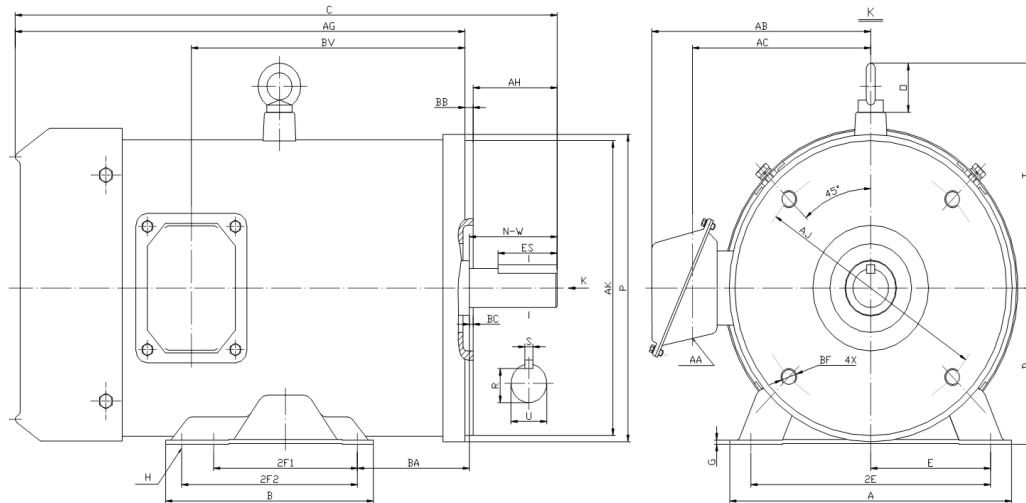
WASHDOWN DUTY MOTOR

NEMA PREMIUM EFFICIENCY

STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



DIMENSIONS

HP	RPM	Frame	Mounting													
			A	B	C	D	G	H	E	2E	2F1	2F2	P	AK	AJ	AH
1.5	1200	182TC	8.80	6.50	17.00	4.50	0.12	0.71*0.47	3.75	7.50	4.50	5.50	8.85	8.500	7.250	2.62

Mounting					Shaft Extension, Key Set					Conduit Box				Bearings		Mount
AG	BA	BB	BC	BF	U	R	S	ES	N-W	AA	AB	AC	BV	DE	ODE	
14.13	3.50	0.25	0.12	4*1/2-13	1.125	0.986	0.250	1.78	2.75	0.94	7.00	5.30	8.60	6308-2RS	6306-2RS	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.



PESS182TC1.5M-6

WASHDOWN DUTY MOTOR

NEMA PREMIUM EFFICIENCY

STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION



INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1.5	1170	182TC	208-230/460	60	1.15	F	B	2.5	L	TEFC	66	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6308-2RS	6306-2RS	9 Lead 2Y/Y	79
2.5	20.0	85.5	80.0	76.0	83.0	0.70	0.65	0.58	6.6	255	270				

NAME PLATE

 North American Electric, Inc.																				CONNECTION DIAGRAMS																																							
INVERTER DUTY 20:1 VT; 10:1 CT										WASHDOWN DUTY STAINLESS STEEL MOTORS																																																	
CAT NO: PESS182TC1.5M-6					FRAME 182TC					PHASE 3																																																	
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 66																																																	
HP 1.5		RPM 1170		HP 1.5		RPM 970		DUTY CONT		DES B																																																	
VOLTS 208-230/460			VOLTS 190/380			AMB 40° C			INS F																																																		
FLA 5.4 - 4.9 / 2.45			FLA 5.9/2.95			DE BEARING 6308-2RS																																																					
CODE L		P.F. 0.70		CODE L		P.F. 0.72		ODE BEARING 6306-2RS																																																			
EFF 85.5		MIN 83.0		EFF 83.0		MIN 80.5		LUB: Mobil Polyrex EM																																																			
MOTOR WEIGHT 79 LBS			CONNECTION 9 Lead 2Y/Y			SER NO																																																					
Special purpose motor designed for washdown applications and extremely corrosive environments.																																																		CC 082A									
Hernando, Mississippi																																																											

APPLICATIONS:

Applications include washdown applications, food processing, chemical processing, pharmaceuticals, poultry processing, meat processing, dairy applications, bakeries, snack foods, bottling and extremely corrosive environments.