

PR56C1M4A-575V


GENERAL PURPOSE ELECTRIC MOTOR

NEMA PREMIUM EFFICIENCY

TOTALLY ENCLOSED FAN COOLED

ROLLED STEEL CONSTRUCTION

INVERTER RATED (10:1 VT; 5:1 CT)

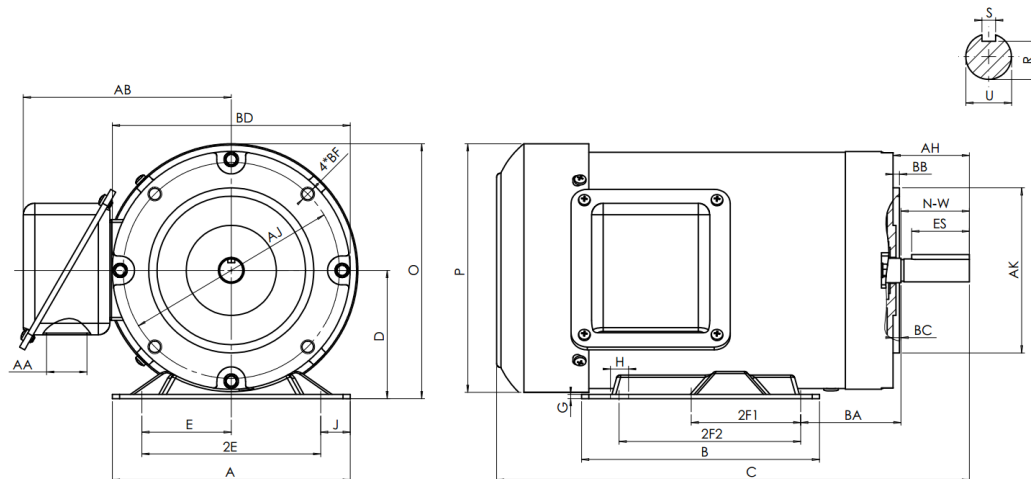

DIMENSIONS

HP	RPM	Frame	MOUNTING														
			A	B	C	D	G	H	J	E	2E	2F1	2F2	O	P	T	BA
1	1800	56C	6.30	4.00	10.70	3.50	0.12	0.35	0.81	2.44	4.88	3.00	NA	7.00	6.82	NA	2.75

FLANGE							Shaft Extension, Key Set					
AH	AJ	AK	BB	BC	BD	BF	U	V	R	S	ES	N-W
2.06	5.875	4.50	0.16	0.19	6.46	3/8-16UNC	0.625	NA	0.517	0.188	1.41	1.88

Conduit Box		Bearings		Mount
AA	AB	DE	ODE	
1.10	5.75	6203-2RZC3	6203-2RZC3	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





PR56C1M4A-575V

GENERAL PURPOSE ELECTRIC MOTOR
NEMA PREMIUM EFFICIENCY
TOTALLY ENCLOSED FAN COOLED
ROLLED STEEL CONSTRUCTION
INVERTER RATED (10:1 VT; 5:1 CT)

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1	1760	56C	575	60	1.15	F	B	2.222	N	TEFC	55	40°C

Amps (575V)		Efficiency (%)			Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	100%	75%	50%	FLT	LRT %	BDT %	6203-2RZC3	6203-2RZC3	3 Lead Y	33
/	8.5	85.5	85.9	83.1	0.77	0.68	0.54	3.01	421	503				

NAME PLATE											
3 PHASE AC INDUCTION MOTOR											
CAT NO. PR56C1M4A-575V				FRAME 56C		PH 3		575 V Wye 			
HZ 60		SF 1.15		ENCL TEFC		IP 55					
HP 1		RPM 1760		DUTY CONT		DES B					
VOLTS 575				AMB 40 °C		INS F					
FLA 1.2				DE.BRG 6203-2RZC3							
CODE N		P.F 0.77		ODE.BRG 6203-2RZC3							
EFF 85.5		MIN 82.5		LBS 33							
CONNECTION 3 Lead Y				SER NO							
Hernando, MS www.naemotors.com										CC 340B	

APPLICATIONS:

General purpose use on pumps, fans, blowers, compressors, conveyors, material handling and other industrial machinery installed in damp, dusty or dirty environments.