


SS184TC5M-2-RB

Stainless Steel Washdown Duty Motor, C-Face, Round Body, IP66

Energy Efficient – Three Phase – TEFC - AC Motor - Inverter Duty (20:1 VT; 10:1 CT)

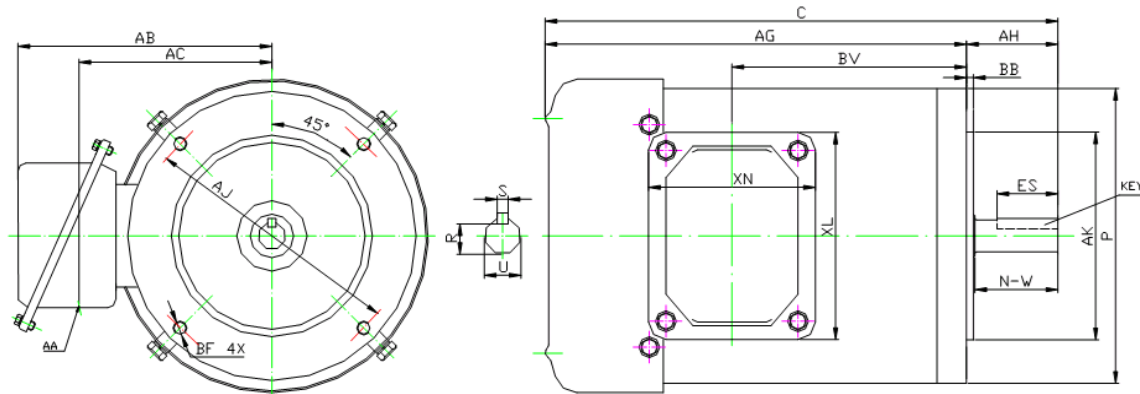

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	P	BC	AH	AB	XN	XL	AA
E	2F1	2F2	H	BA	N/A	N/A	16.89	N/A	.118	8.9	.19	2.62	7.0	4.05	4.45	0.94
KEY					KEYSET R		FLANGE					SHAFT EXTENSION				
WIDTH		LENGTH			0.986		AK	AJ	BF		BB	BD	N-W		U	
0.25		1.78					48.5	7.25	3/8-16		0.16	6.5	2.75		1.125	

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
5	3525	184TC	K	87.5	87.5	86.5	89.0	86.0	80.3	7.3	255	216
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
6.0	46.0	6308RS	6306RS	F	TEFC	1.15	90					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com