

SS213TC3M-6

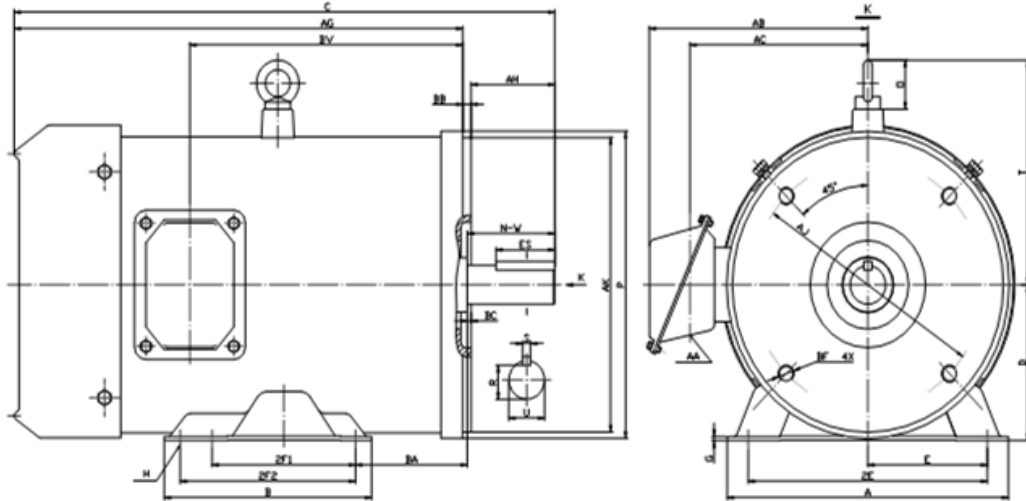
WASHDOWN DUTY MOTOR

HIGH EFFICIENCY / EISA COMPLIANT

STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31



DIMENSIONS

HP	RPM	Frame	Mounting													
			A	B	C	D	G	H	E	2E	2F1	2F2	P	AK	AJ	AH
3	1200	213TC	9.60	8.10	20.70	5.25	0.16	0.41	4.25	8.50	5.50	7.00	10.08	8.500	7.250	3.12

Mounting					Shaft Extension, Key Set					Conduit Box				Bearings		Mount
AG	BA	BB	BC	BF	U	R	S	ES	N-W	AA	AB	AC	BV	DE	ODE	
17.33	4.25	0.25	0.25	4*3/8-16	1.375	1.201	0.312	2.41	3.38	0.94	7.70	6.20	11.35	6308	6208	F1

BEARING LUBRICATION: The bearings come lubricated with Mobile Polyrex EM Polyurea Grease.



SS213TC3M-6

WASHDOWN DUTY MOTOR

HIGH EFFICIENCY / EISA COMPLIANT

STAINLESS STEEL CONSTRUCTION - C-FLANGE WITH FEET

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION



INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
3	1175	213TC	208-230/460	60	1.15	F	C	2.1	K	TEFC	66	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6308	6208	9 Lead 2Y/Y	170
4.3	32.0	87.5	87.0	86.0	85.5	0.74	0.62	0.51	13.2	250	280				

NAME PLATE

 North American Electric, Inc.										WASHDOWN DUTY STAINLESS STEEL MOTOR																								
INVERTER DUTY 20:1 VT; 10:1 CT										HIGH EFFICIENCY EISA COMPLIANT										CONNECTION DIAGRAMS														
CAT NO: SS213TC3M-6					FRAME 213TC					PHASE 3					208 - 230V  460V 																			
HZ 60		S.F. 1.15			HZ 50		S.F. 1.2			ENCL TEFC		IP 66																						
HP 3		RPM 1175			HP 2		RPM 970			DUTY CONT		DES C																						
VOLTS 208-230/460					VOLTS 190/380					AMB 40° C																				INS F				
FLA 9.5 - 8.6 / 4.3					FLA 7.2/3.6					DE BEARING 6308																								
CODE K		P.F. 0.74			CODE K		P.F. 0.76			ODE BEARING 6208																								
EFF 87.5		MIN 85.5			EFF 85.5		MIN 83			LUB: Mobile Polyrex EM																								
MOTOR WEIGHT 170 LBS					CONNECTION 9 Lead 2Y/Y					SER NO																								
Special purpose motor designed for washdown applications and extremely corrosive environments.  Hernando, Mississippi															CC 082A																			

APPLICATIONS:

Applications include washdown applications, food processing, chemical processing, pharmaceuticals, poultry processing, meat processing, dairy applications, bakeries, snack foods, bottling and extremely corrosive environments.