


SS213TC7.5M-2-RB

Stainless Steel Washdown Duty Motor, C-Face, Round Body, IP66

Energy Efficient – Three Phase – TEFC - AC Motor - Inverter Duty (20:1 VT; 10:1 CT)

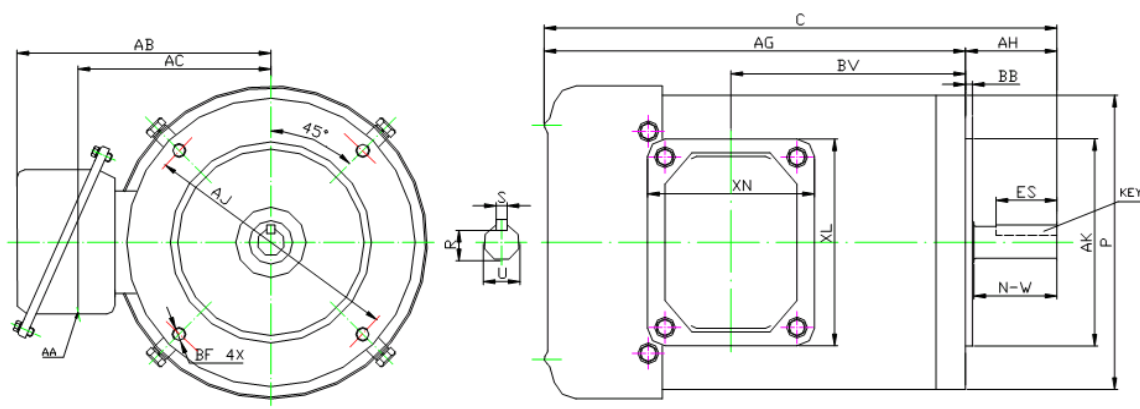

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	P	BC	AH	AB	XN	XL	AA
E	2F1	2F2	H	BA												
N/A	N/A	N/A	N/A	N/A	N/A	N/A	21.5	N/A	.157	10	.25	3.12	7.6	4.05	4.54	0.94
KEY					KEYSET R	FLANGE							SHAFT EXTENSION			
WIDTH			LENGTH			AK	AJ	BF		BB		BD	N-W		U	
0.312			2.41		1.201		8.5	7.25	3/8-16		0.16		6.5	3.38		1.375

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
7.5	3530	213TC	H	88.5	88.0	88.0	85.0	80.0	-	11.1	265	200
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
9.4	63.0	6308RS	6208RS	F	TEFC	1.15	110					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com