


SS215TC10M-2-RB

Stainless Steel Washdown Duty Motor, C-Face, Round Body, IP66

Energy Efficient – Three Phase – TEFC - AC Motor - Inverter Duty (20:1 VT; 10:1 CT)

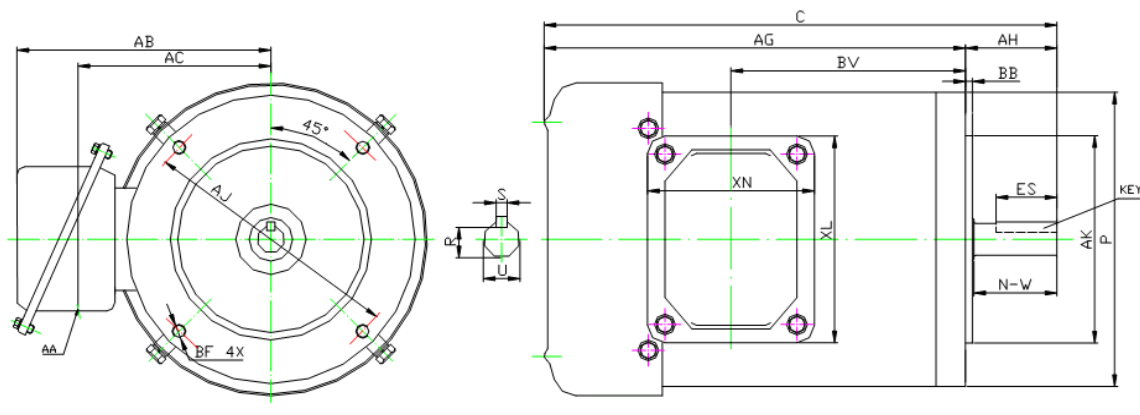

DIMENSIONS – INCHES

MOUNTING					A	B	C	D	G	P	BC	AH	AB	XN	XL	AA
E	2F1	2F2	H	BA	N/A	N/A	21.5	N/A	.157	10	.25	3.12	7.6	4.05	4.54	0.94
KEY					KEYSET R		FLANGE					SHAFT EXTENSION				
WIDTH		LENGTH					AK	AJ	BF		BB	BD	N-W		U	
0.312		2.41			1.201		8.5	7.25	3/8-16		0.16	6.5	3.38		1.375	

PERFORMANCE DATA

Three Phase – 60Hz - 208-230/460V – NEMA Design B - Max. Ambient: 40° C

HP	Speed	Frame	NEMA Code	Efficiency (%)			Power Factor (%)			Torque (ft-lb)		
				100%	75%	50%	100%	75%	50%	FLT	BDT%	LRT%
10	3525	215TC	H	89.5	89.0	89.0	87.0	82.0	-	14.7	285	200
Amps (460V)		DE Bearing	ODE Bearing	Insulation Class	Enclosure Type	Service Factor	Weight (lbs)					
FLA	LRA											
12.0	81.0	6308RS	6208RS	F	TEFC	1.15	135					



North American Electric, Inc. 350 Vaiden Drive, Hernando, MS 38632

Toll Free: 1-800-884-0405 Phone: 662-429-8049 Fax: 662-429-8546

www.naemotors.com