



SS56C1/3M-4-RB


WASHDOWN DUTY MOTOR

HIGH EFFICIENCY / EISA COMPLIANT

STAINLESS STEEL CONSTRUCTION - ROUND BODY (C-FLANGE FOOTLESS)

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

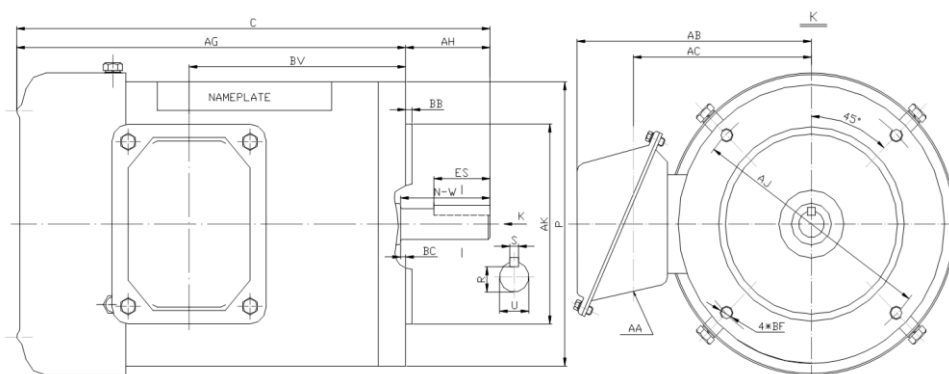

DIMENSIONS

HP	RPM	Frame	Mounting									
			C	P	AK	AJ	AH	AG	BA	BB	BC	BF
1/3	1800	56C	11.59	6.50	4.500	5.875	2.06	9.53	0.16	N/A	9.53	4*3/8-16

Shaft Extension, Key Set					Conduit Box				Bearings		Mount
U	R	S	ES	N-W	AA	AB	AC	BV	DE	ODE	
0.625	0.517	0.188	1.41	1.88	0.86	5.75	4.25	5.30	6205-2RS	6205-2RS	F1

BEARING LUBRICATION: The bearings come lubricated with Mobil Polyrex EM Polyurea Grease.





SS56C1/3M-4-RB

WASHDOWN DUTY MOTOR

HIGH EFFICIENCY / EISA COMPLIANT

STAINLESS STEEL CONSTRUCTION - ROUND BODY (C-FLANGE FOOTLESS)

TOTALLY ENCLOSED FAN COOLED - IP66 CONSTRUCTION

INVERTER DUTY 10:1 CT; 20:1 VT - NEMA MG1 PART 31

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient
1/3	1745	56C	208-230/460	60	1.15	F	B	3.1	K	TEFC	66	40° C

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			DE Bearing	ODE Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6205-2RS	6205-2RS	9 Lead 2Y/Y	28
0.6	8.0	82.5	75.0	72.0	80.0	0.71	0.58	0.49	1.0	285	300				

NAME PLATE

 North American Electric, Inc.				WASHDOWN DUTY STAINLESS STEEL MOTOR				CONNECTION DIAGRAMS			
INVERTER DUTY 20:1 VT; 10:1 CT				HIGH EFFICIENCY EISA COMPLIANT							
CAT NO: SS56C1/3M-4-RB				FRAME 56C				PHASE 3			
HZ 60		S.F. 1.15		HZ 50		S.F. 1.0		ENCL TEFC		IP 66	
HP 1/3		RPM 1745		HP 1/3		RPM 1450		DUTY CONT		DES B	
VOLTS 208-230/460				VOLTS 190/380				AMB 40° C		INS F	
FLA 1.4 - 1.2 / 0.6				FLA 1.3/0.65				DE BEARING 6205-2RS			
CODE K		P.F. 0.71		CODE K		P.F. 0.73		ODE BEARING 6205-2RS			
EFF 82.5		MIN 80.0		EFF 80.0		MIN 77.0		LUB: Mobil Polyrex EM			
MOTOR WEIGHT 28 LBS				CONNECTION 9 Lead 2Y/Y				SER NO			
Special purpose motor designed for washdown applications and extremely corrosive environments.  Hernando, Mississippi											

208-230V		
		
		
		
L1	L2	L3

460V		
		
		
		
L1	L2	L3

APPLICATIONS:

Applications include washdown applications, food processing, chemical processing, pharmaceuticals, poultry processing, meat processing, dairy applications, bakeries, snack foods, bottling and extremely corrosive environments.