




TERMINAL BOARD WITH 1/4" WIDE QUICK DISCONNECT TERMINALS

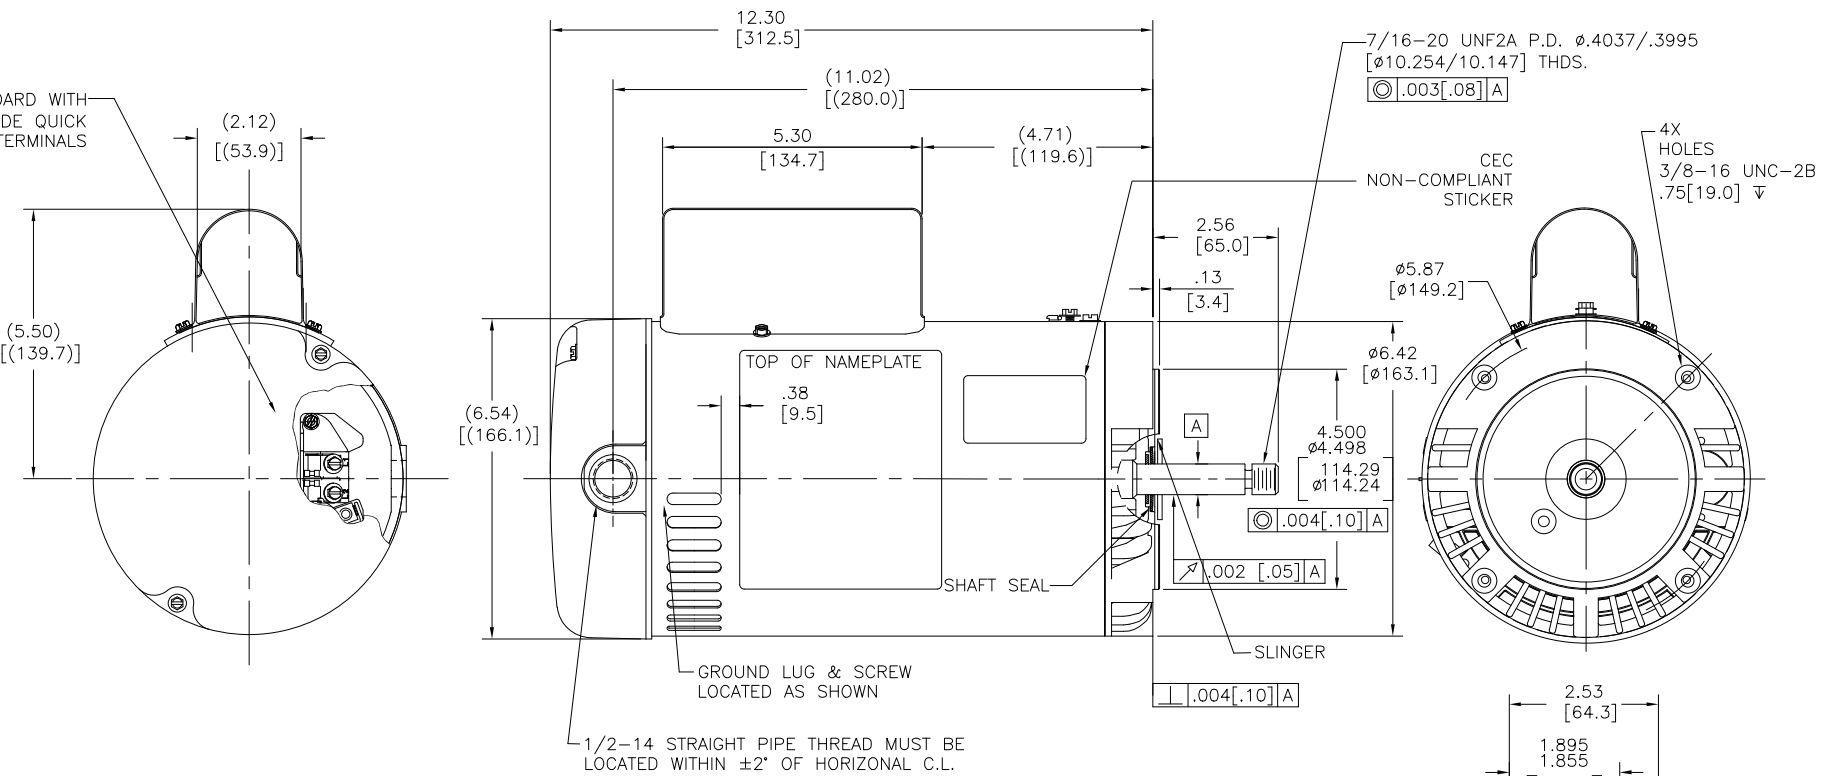

NAMEPLATE DATA	
MODEL: 196385	
CUST PN: ST1302V1	
HP: 3.0	SF: 1.15
ROT: CCWPE	
RPM: 3450	
TYPE: CP	CODE: G
FORM:	FRAME: Y56J
VOLTS: 208-230	
AMPS: SF15.0-13.3	
MAX AMPS: --	
SF AMPS: --	
PH: 1	HZ: 60
INS: B	AMB: 50
DUTY: CONT	
ENCLOSURE: DP	
THERMALLY PROTECTED	

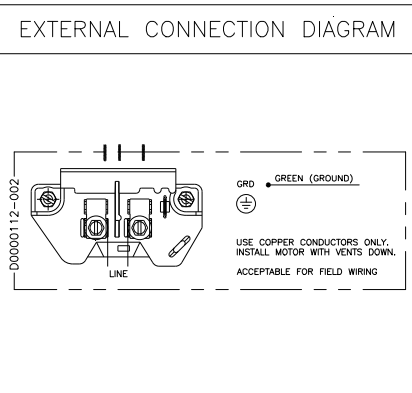

- NOTES
1. END PLAY NOT TO EXCEED .010[.25] MEASURED WITH NO THRUST.
  2. △ FOR THREADED SHAFT EXT. ECCENTRICITY OF THREADED PORTION OF SHAFT IS HELD WITHIN .004 [.10] TOTAL GAGE READING WITH THE INDICATOR ON O.D. OF GROUND RING GAGE AS SHOWN. THE GAGE BEING STATIONARY WITH RESPECT TO THE ROTOR.
  3. FOR THREADED SHAFT EXT. MATING PARTS SHOULD BE RELIEVED ONE THREAD TO CLEAR FILLET.
  4. FINISH PAINT TO BE BLACK LACQUER
  5. STAINLESS STEEL SHAFT
  6. .44[11.2] WRENCH FLATS ON SHAFT -FOR ACCESS TO THIS WRENCH FLAT REMOVE END COVER.
  7. CTQ REQUIREMENT SEE EPO00105-008.
  8. RoHS & REACH ETC REQUIREMENT SEE EPO00014.

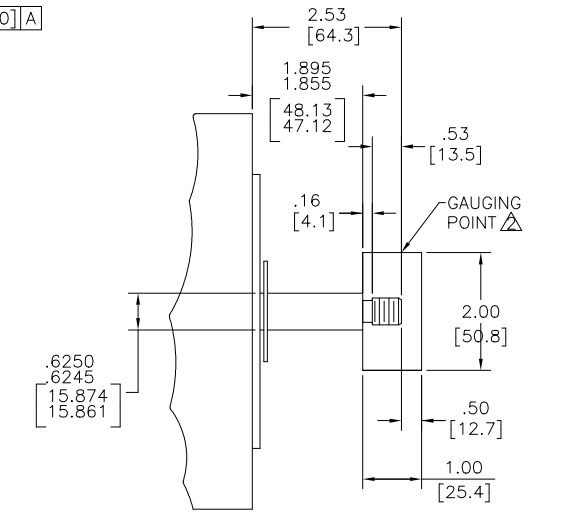

PERFORMANCE CURVE	APPROVED SAMPLE		
101101011	0603286		
UL COMPONENT	CSA		
FILE#	CCN#	FILE#	GUIDE#
E14663	XEWR2	LR4642	4211-01
CUSTOMER	DISTRIBUTION		

CRITICAL TO QUALITY CHARACTERISTICS(CTQs)	DRAWING REVISION	REVISION BY	DATE	TOLERANCES UNLESS OTHERWISE SPECIFIED	DRAWN BY:
Ⓟ PROCESS	P	MINJINGJIANG	02-24-2022	DEC: INCH mm ANGLE	MEO
Ⓜ ENGINEERING	ECO	TRISTIAZHAO	02-24-2022	.XX ±0.02 [±0.5]	DATE:
Ⓜ APPLICATION	ECO DESCRIPTION			.XXX ±0.005 [±0.13]	APPROVED BY:
Ⓜ REGULATORY	CONSOLIDATE NAMEPLATE CHANGE			.XXXX ±0.0005 [±0.013]	DATE:
Ⓜ LIFE				REMOVE BURRS & BREAK SHARP EDGES .003[015] [08.38]	REFERENCE
				CORNER FILLETS .02 [5]	MATERIAL
				MACHINED SURFACES	PROCESS/FINISH
				mm SHOWN IN [BRACKETS]	SIZE DWG NO
					THIRD ANGLE PROJECTION

REGAL™	Regal Beloit America, Inc.
DESCRIPTION	ST1302V1 OUTLINE
MATERIAL	
PROCESS/FINISH	
SIZE DWG NO	ST1302V1
THIRD ANGLE PROJECTION	