


035660

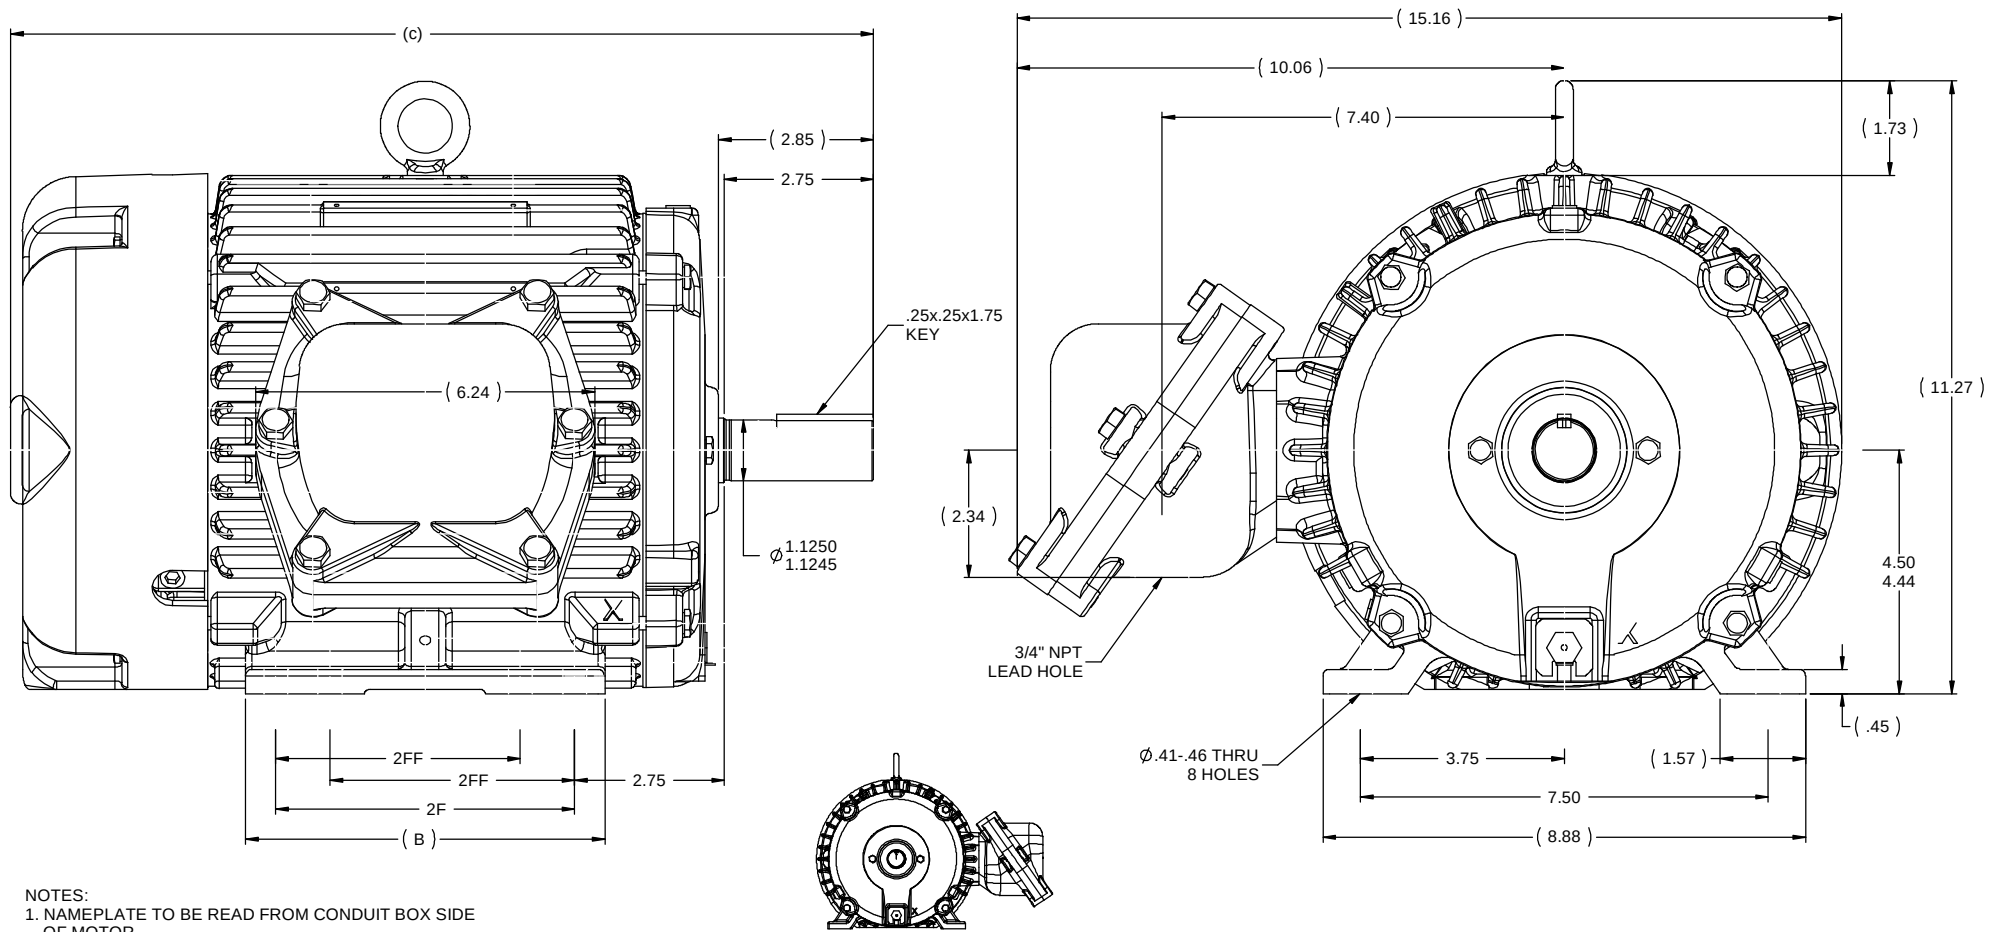

NOTES:

1. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.
2. CONDUIT BOX CAN ROTATED IN 90 ° STEPS.
3. CONDUIT BOX CAN MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180 °. THIS MODIFICATION CAN BE PERFORMED ONLY BY THE ORIGINAL EQUIPMENT MANUFACTURER, OR BY A FACILITY THAT IS COVERED UNDER UNDERWRITERS LABORATORIES INC. CATEGORY PTKQ. TITLED "MOTORS AND GENERATORS REBUILT FOR USE IN HAZARDOUS LOCATIONS."

F2 LOCATION →

1000	184	17.87	8.61	7.50	5.50	3.75
800	182/184	15.87	6.61	5.50	4.50	2.75
DASH	FRAME	C	B	2F	2FF	BS

				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN CTO 07-05-2007	
				DEC	INCHES		CHK	ML 3/26/2008
3	ADDED F2 VIEW.	ST 11/04/2011	AK	.XX	±.03	TITLE OUTLINE - EPFC 180 FR.	APPR	SW 3/26/2008
2	CHANGED 1000 FRAME FROM 182/184 TO 184 ISAAC 11-2933	KBB 6/28/2011	EH	.XXX	±.005		SCALE	7:16
1	CHGD 1000 FRAME DIM FROM 2.75 TO 3.75	PN 2/10/2011	AJ	.XXXX	±.0005	MATL	REF	
NO	REVISION	BY & DATE	CHK	ANG	±7.30"	FINISH	FMF	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP		CAD FILE	035660	PREV
				DIST	WA - NLV	SIZE	B	DRAWING NO
								035660
								REV
								3