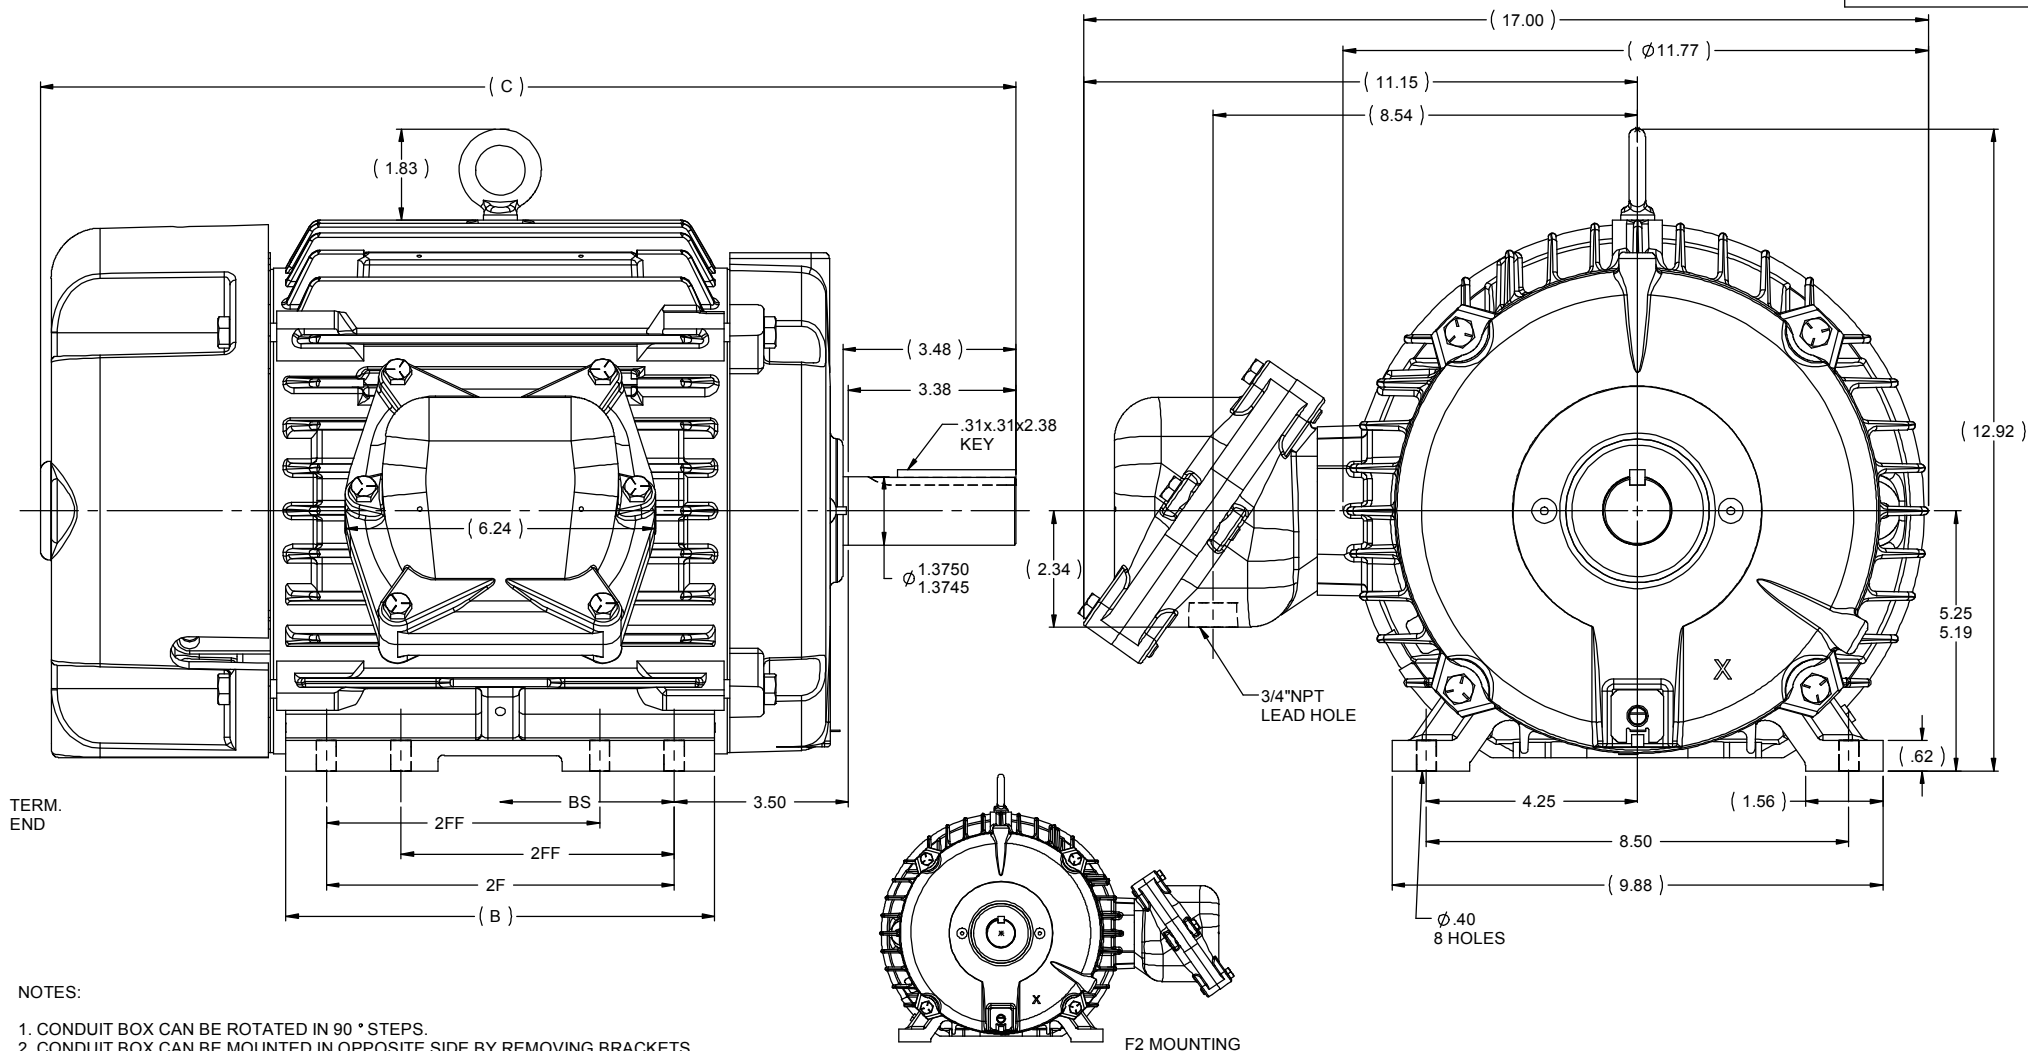


037660

TERM.
END

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90 ° STEPS.
2. CONDUIT BOX CAN BE MOUNTED IN OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180 °. THIS MODIFICATION CAN BE PERFORMED ONLY BY THE ORIGINAL EQUIPMENT MANUFACTURER, OR BY A FACILITY THAT IS COVERED UNDER UNDERWRITERS LABORATORIES INC. CATEGORY PTKQ, TITLED "MOTOR AND GENERATORS, REBUILT FOR USE IN HAZARDOUS LOCATION".
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

1212	213/215	22.63	11.76	10	7	5
912	213/215	19.63	8.63	7	5.5	3.5
DASH	FRAME	C	B	2F	2FF	BS

				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN AK 10/28/2009	
				DEC	INCHES		CHK SK 10/28/2009	APPR
				X	±.1	TITLE OUTLINE 210 FR. - EPFC	SCALE 1:8	
				XX	±.02		REF SS84370	
02	UPDATED PER IS12-0462	GR 2/15/2012	PN	XXX	±.005	MATH	FMF 215TTGN4026	
01	ADDED F2 MOUNTING VIEW	PN 12/30/2010	SR	XXXX	±.0005		PREV	
REVISION				CHK	ANG	FINISH	DRAWING NO	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	±7.30"	CAD FILE 037660	SIZE B	
				DIST	LB - MT2		DRAWING NO 037660	
							REV 02	