


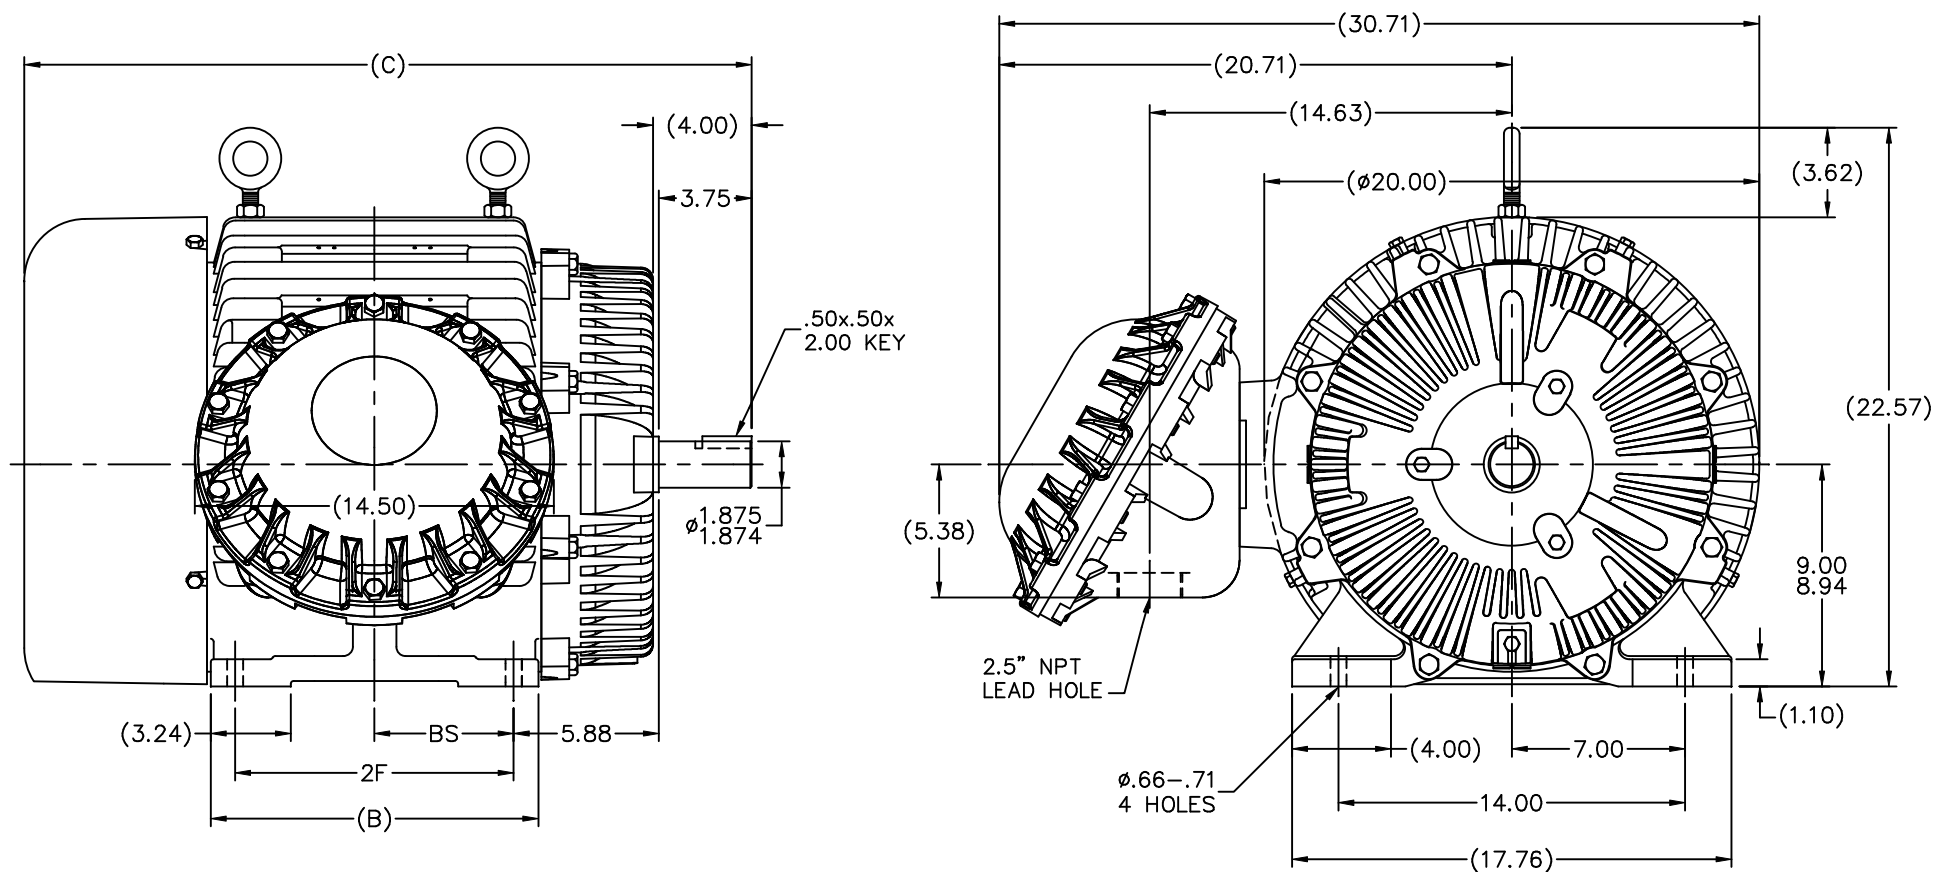

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

(REPLACES B-SS503646)

DASH	FRAME	B	C	2F	BS
1350	364TS	13.25	29.38	11.25	5.62
1450	365TS	14.25	30.38	12.25	6.12

		TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC		DRAWN KL 07-23-2001	
		DEC.	INCHES			CHK	DJK 07-23-2001
		.X	±.1			APPD	JES 07-23-2001
3	UPDATE OUTLINE WITH NEW D.E. BRACKET	JJB	06/21/2007	ML	.XX	±.03	TITLE OUTLINE
2	REDRAWN IN AUTO CAD	TAT	06-29-2004	ML	.XXX	±.005	360TS FR. - EXP. PR.
1	NEW DRAWING	MU38273	KL 07-23-2001	ML	.XXXX	±.0005	MAT'L
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT						CAD FILE ss518623	SIZE B
						DIST WA	DRAWING NO. SS518623
							PAGE 3