



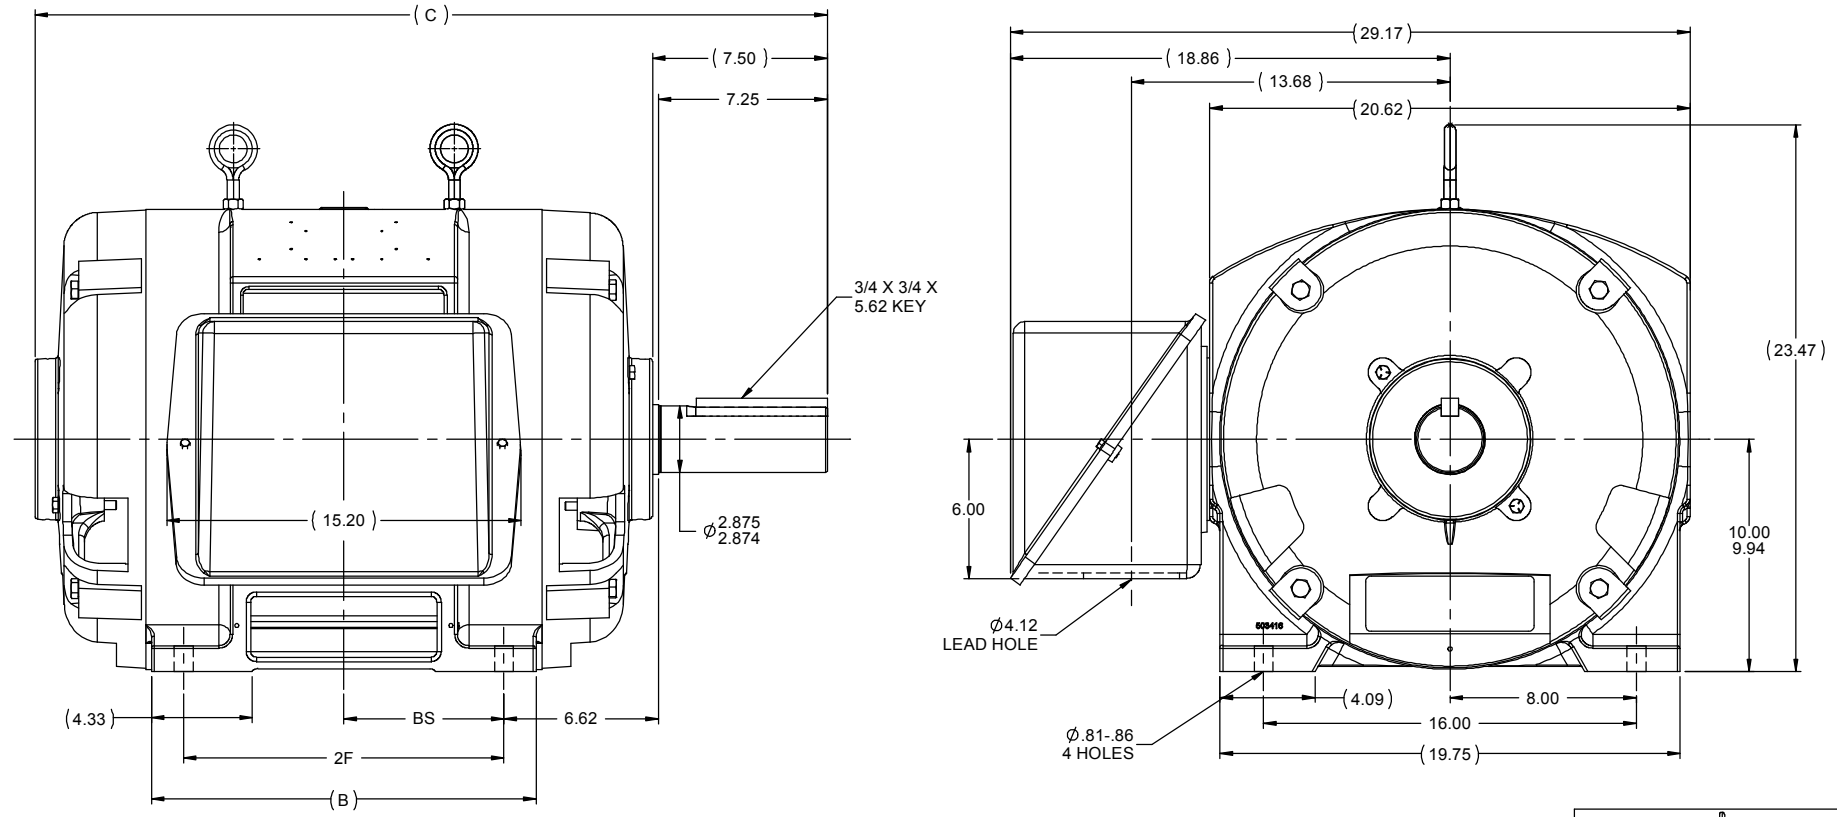

- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90 ° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180 °
 3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

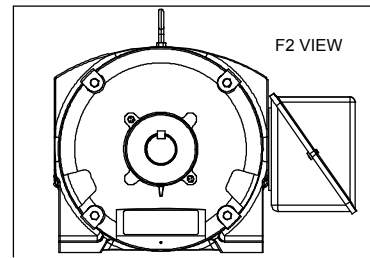

DASH	FRAME	B	C	BS	2F
1550	404T	15.00	32.51	6.12	12.25
1700	405T	16.50	34.01	6.88	13.75

		TOLERANCES UNLESS SPECIFIED		marathon electric		DRAWN TJB 2/24/1988	
		CTO	DEC	INCHES			CHK JL 2/24/1988
11	ADDED F2 VIEW	TJW 1/6/2010	ML	X	±.1		
10	REDRAWN IN AUTOCAD	TAT 6/29/2004	XX	±.03	TITLE OUTLINE		APPR ML 2/24/1988
9	REPLACED ONE EYEBOLT WITH TWO CN28063	BJW 2/10/2000	XXX	±.005	400T FR. - DR.PR. - (STD0		SCALE 3:16
8	UPDATED C'BOX GEOMETRY CN28063	TRB 2/10/2000	XXXX	±.0005	MATL		REF
7	REDRAWN ON CADD	TLB 2/24/1988	CHK	ANG	±7°30"	FINISH	
NO		REVISION		BY & DATE		PAGE OF	
		THIRD ANGLE PROJECTION		RFP		PREV	
				NETWORK FILE NAME		SS509599	
				SIZE		DRAWING NO	
				B		SS509599	
						REV	
						11	