
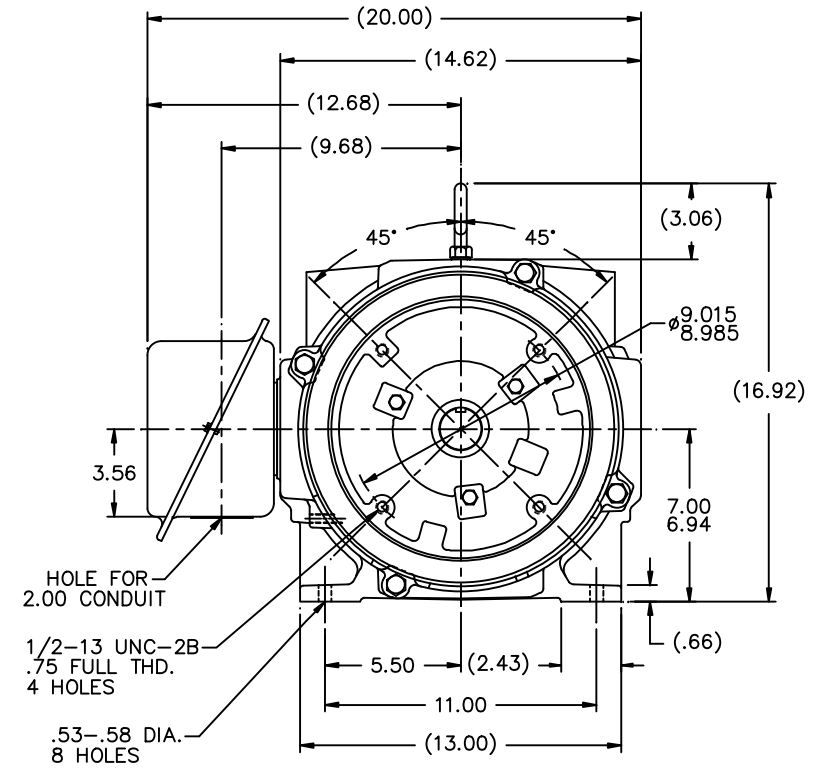


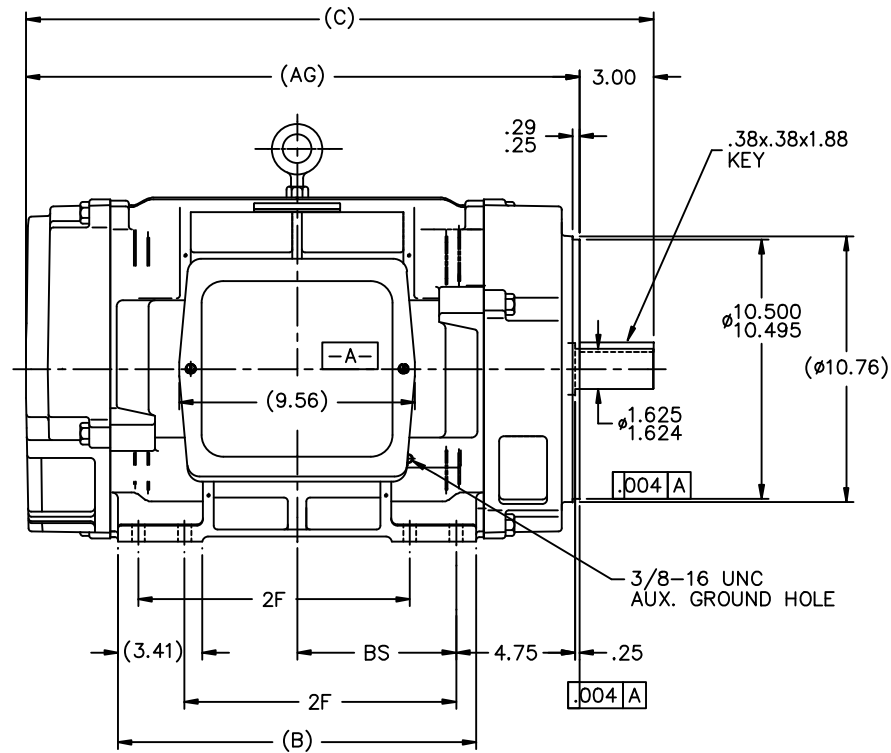

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

DASH	FRAME	B	C	2F	BS	MTG	AG
1325	284TSC	12.63	23.57	9.50	5.50		20.57
1512	286TSC	14.50	25.44	11.00	6.44		22.44

				TOLERANCES UNLESS SPECIFIED		MARATHON ELECTRIC	DRAWN RWR 03/03/2004
				DEC.	INCHES		
				.X	±.1	TITLE OUTLINE 280TSC FR. -TS -DR.PR. - CAST IRON	CHK
				.XX	±.02		APPD
2	2.00 CONDUIT WAS 1.50	ECN #25435	WGJ 08-16-2012	EMH	.XXX ±.005	MAT'L	SCALE 1=5
1	REPLACED D.E. BRKT W/Ø10.50 FACE BRKT	MU49925	MSG 1/5/2010	MJS	.XXXX ±.0005		REF
NO. REVISION				CHK	ANG ±7°30"	FINISH	FMF
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP		CAD FILE ss207877	PREV
				DIST	WA-LB	SIZE B	DRAWING NO. SS207877
						PAGE 1 OF 1	REV. 2