
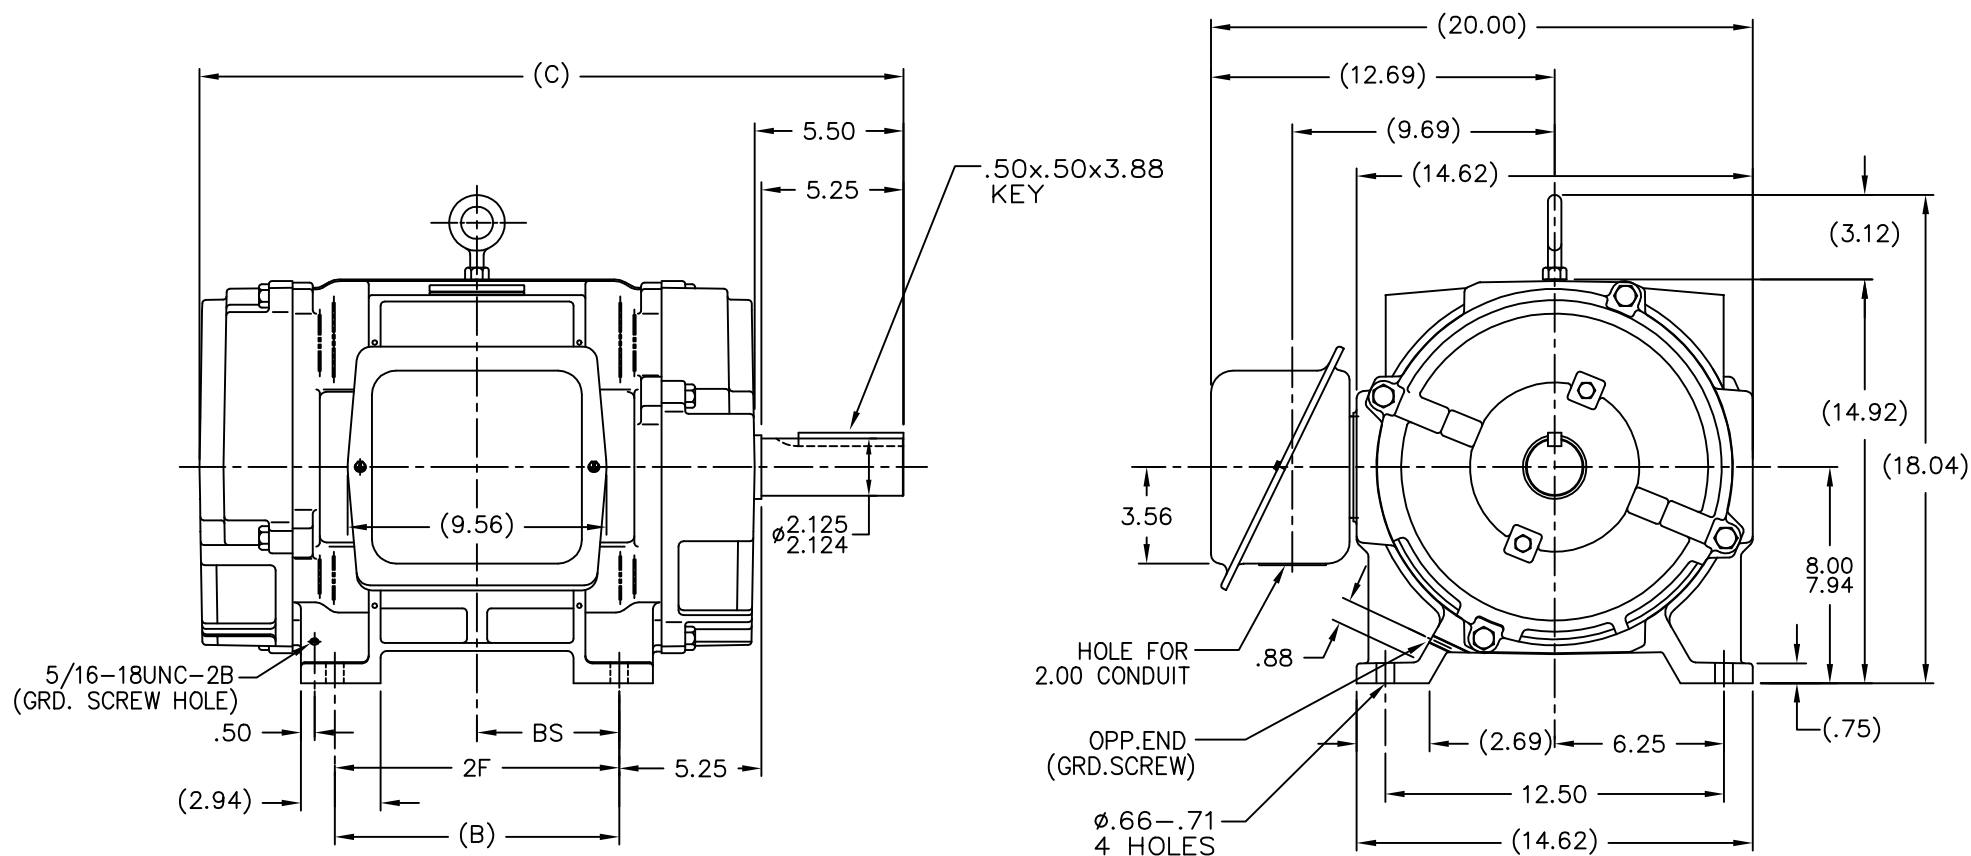




NOTES:

1. BOX CAN BE ROTATED IN 90° STEPS
2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

					TOLERANCES UNLESS SPECIFIED		DRAWN JL 02/17/1988		
				DEC. INCHES	CHK JPN 03/08/1998				
7	REDAWN IN AUTOCAD	RWR 05/27/2004	ML	.X ±.1	APPD LS 03/21/1988				
6	REVISED TO N.E.C. CONDUIT BOX CN28428	NJS 02/16/2000	ML	.XX ±.03	SCALE 1=4.5				
5	ADDED 5/16 GND. SCREW HOLE CN21725-1005	DRS 11/05/1996	ML	.XXX ±.005	REF	TITLE OUTLINE -DR.PR. -CAST IRON 320T FR. -BB -TS -D.E.V.			
4	UPDATED SHAFT HEIGHT CN16763	DRS 08/13/1996	JPN	.XXXX ±.0005	MATL		FINF		
NO.	REVISION	BY & DATE	CHK	ANG ±730°	FINISH		PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OURSERS PROJECTS OF DESIGN AND INVENTION AS RESERVED.				RFP	CAD FILE ss200078	SIZE B	DRAWING NO. SS200078	PAGE 1 OF 1	REV 7
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT.				DIST LB					

DASH	FRAME	C	2F	B	BS	
1362	324T	26.00	10.50	13.00	5.25	
1512	326T	27.50	12.00	14.50	6.00	