
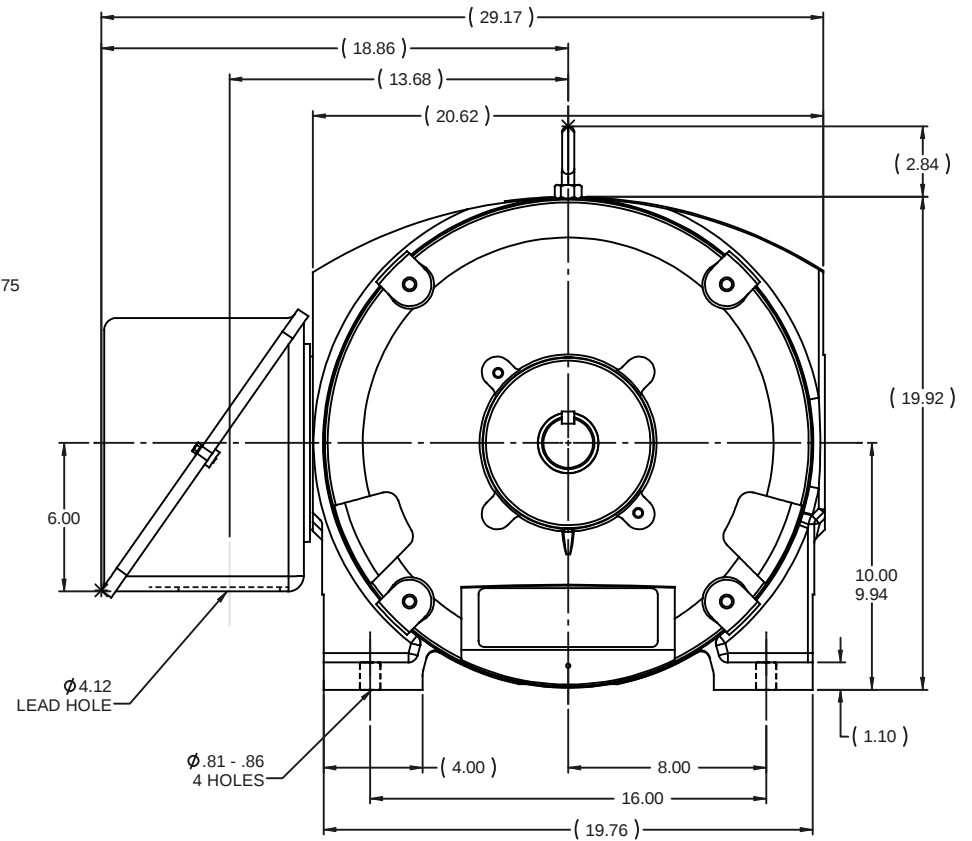


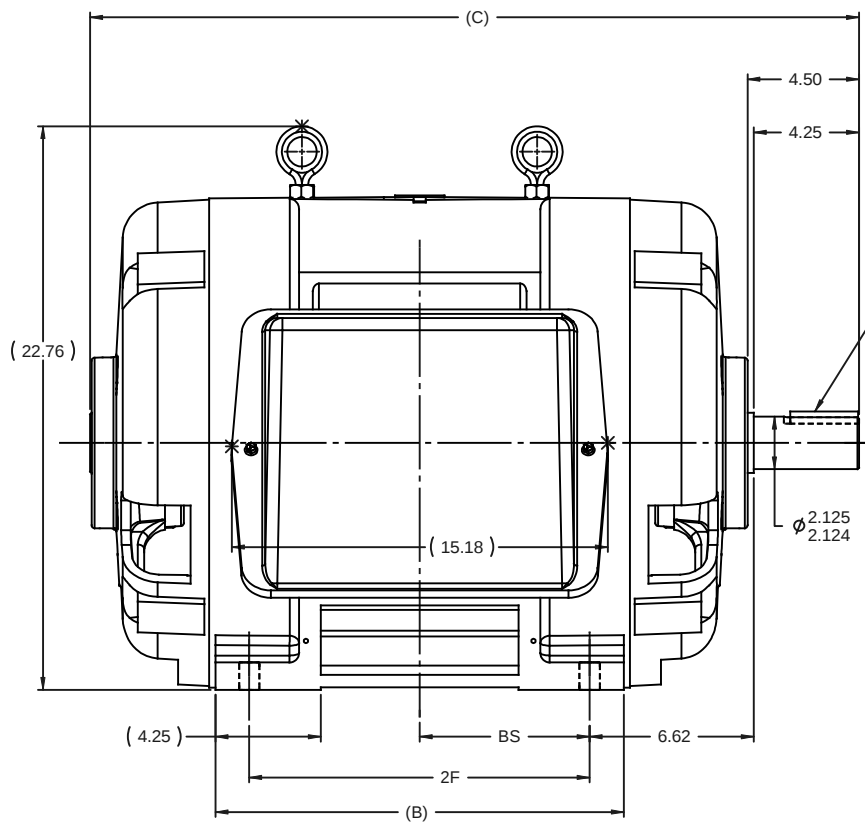

NOTE:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF THE MOTOR.

DASH	FRAME	B	C	2F	BS
1550	404TS	15.00	29.50	12.25	6.12
1700	405TS	16.50	31.00	13.75	6.88

				TOLERANCES UNLESS SPECIFIED		DRAWN TLB 02-24-1988	
				DEC INCHES		CHK JL 02-24-1988	
				X ±.1		APPR ML 02-24-1988	
7	REPLACED ONE EYEBOLT FOR TWO CN28063	BJW 02-09-2000	XX ±.03	TITLE OUTLINE		SCALE 1:5	
6	UPDATED C'BOX GEOMETRY CN28063	DRS 02-09-2000	XXX ±.005	400TS FR. -DR. PR. -(STD.)		REF	
5	RE-DRAWN IN CADS	TLB 02-24-1988	XXXX ±.0005	MAT'L		FMF	
NO	REVISION	BY & DATE	CHK	ANG	FINISH	PAGE	OF
	THIRD ANGLE PROJECTION						
			RFP	02-24-1988	PREV	SIZE	DRAWING NO
			NETWORK FILE NAME	SS509257		B	SS509257
							REV 7