


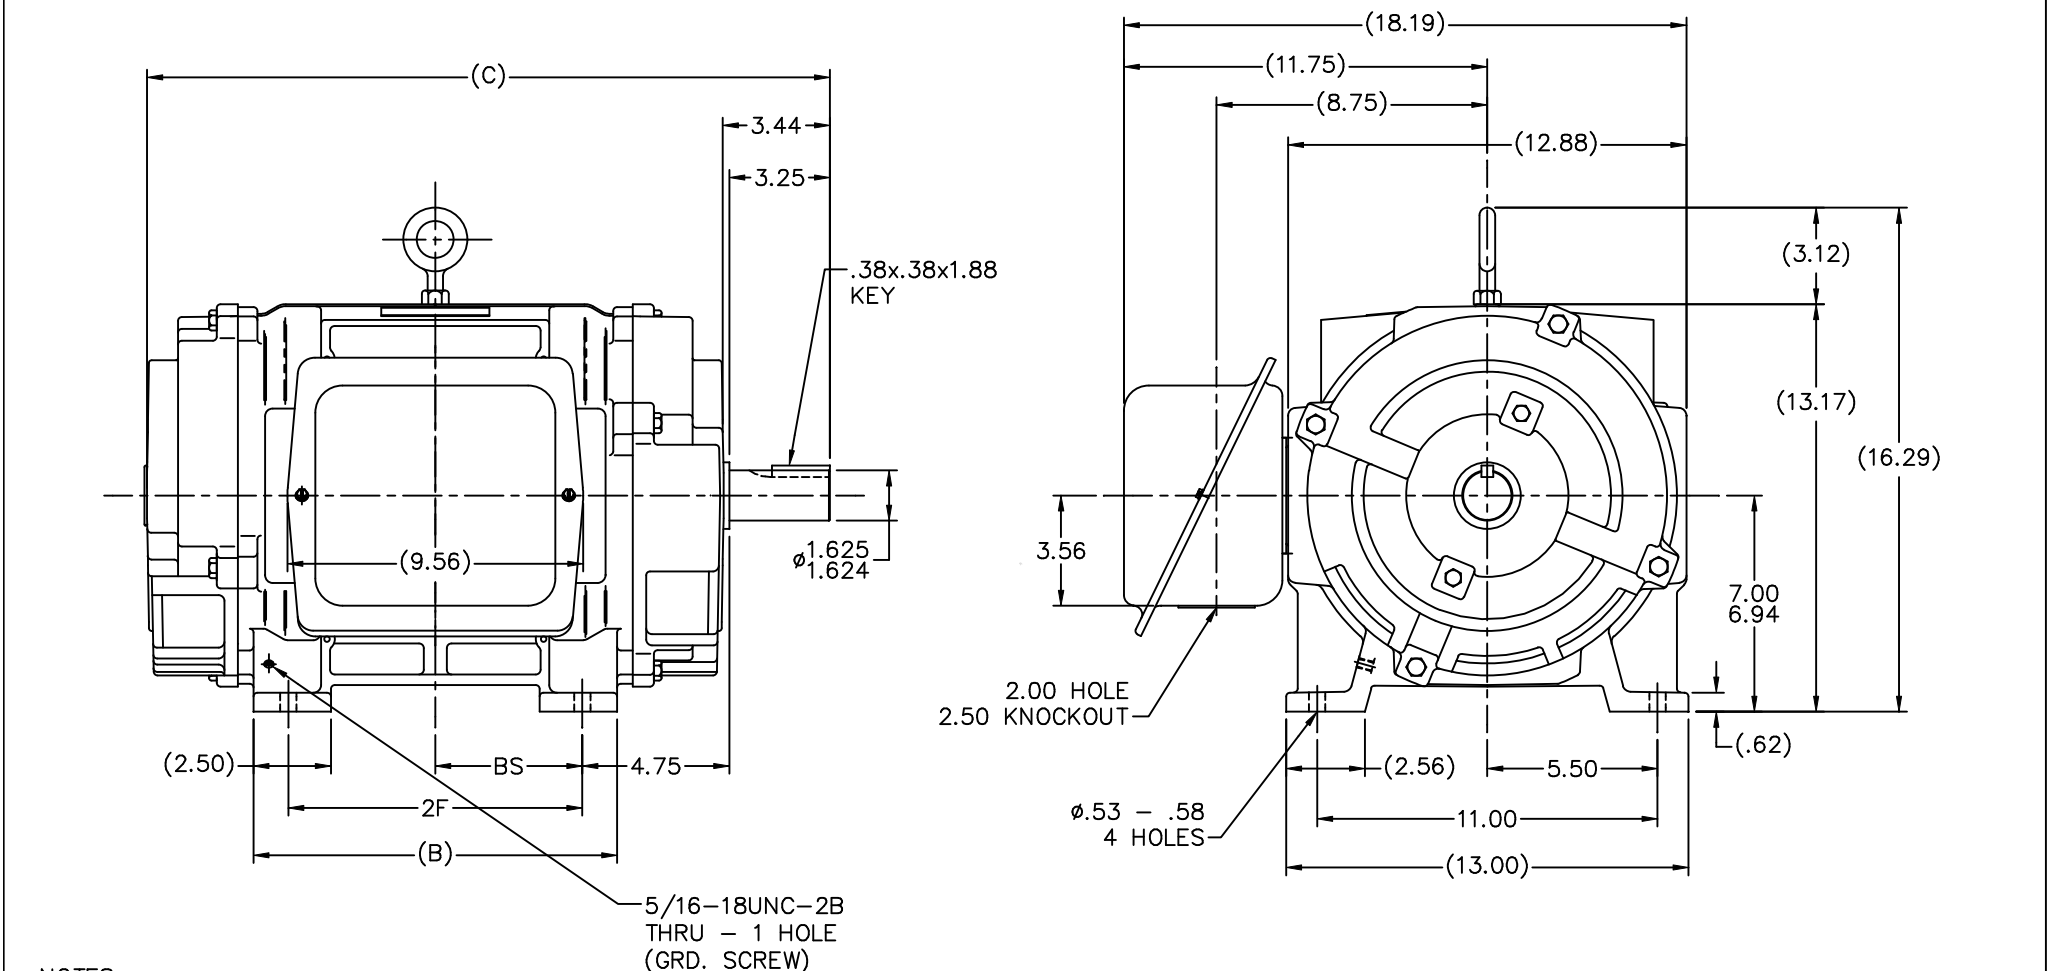

- NOTES:
1. BOX CAN BE ROTATED IN 90° STEPS
 2. BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°
 3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

DASH	FRAME	B	C	2F	BS
1275	284TS	11.75	22.06	9.50	4.75
1425	286TS	13.25	23.56	11.00	5.50

6	REVISED CONDUIT HOLE CALL OUT	CN46008	RJW	03-07-2005		TOLERANCES UNLESS SPECIFIED		DRAWN	JL	02-23-1988	
5	REVISED TO NEC CONDUIT BOX	CN28428	NJS			DEC.		INCHES	CHK	JPN	03-08-1988
4	SHOW GROUND SCREW HOLE IN FOOT	CN22833	PGK			.X		±.1	APPD	LS	03-21-1988
3	UPDATED SHAFT HEIGHT	CN16763	DRS	08-13-1996		.XX		±.03	TITLE OUTLINE - DR.PR. - CAST IRON 280TS FR -BB -TS -DOUBLE. END VENT		
2	FOOT RELIEF ADD	CN10468 REM AIR OPPEN	CN10462	JL	04-21-1992	.JXX	±.005	SCALE			
1	NEW DRAWING		JL	03-23-1988		.JXXX	±.0005	REF			
								MAT'L	FIMF		
NO.	REVISION		BY & DATE		CHK	ANG	±7'30"	FINISH	PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORKED							RFP	CAD FILE	SS200031		
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT							DIST	LB	SIZE	DRAWING NO.	
									B	SS200031	
									PAGE	OF	
									6	REV.	