


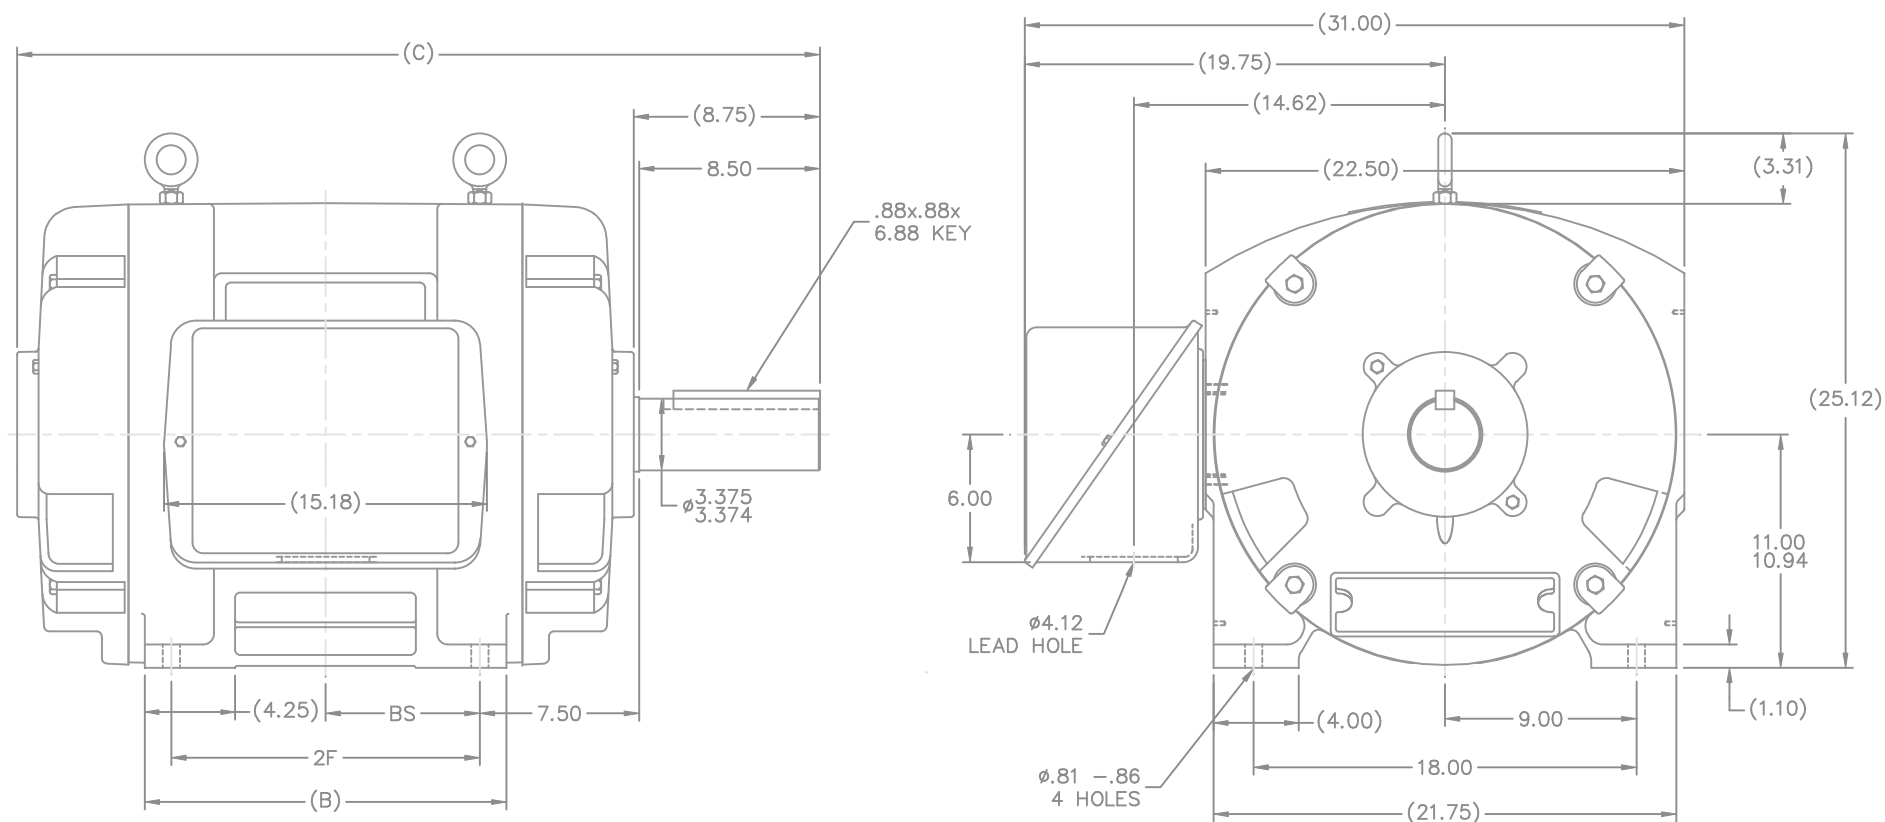

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	BS	NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV
1850	444T	17.00	37.75	14.50	7.25	6	UPDATED FRAME & CONDUIT BOX CN 28063	KL 10-21-2004	.XX	±.03			
2050	445T	19.00	39.75	16.50	8.25	5	REDRAWN IN AUTOCAD	TAT 06-29-2004	.ML	±.005			
						4	REDRAWN ON CADD	TLB 03-11-1988	.XXXX	±.0005			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT													
TOLERANCES UNLESS SPECIFIED DEC. INCHES .X ±.1 .XX ±.03 .XXX ±.005 .XXXX ±.0005										MARATHON ELECTRIC TITLE OUTLINE 440T FR. - DR.PR. MAT'L CAD FILE SS509449			
RFP DIST WA										SIZE	DRAWING NO.	PAGE	REV.
										B	SS509449	6	6