
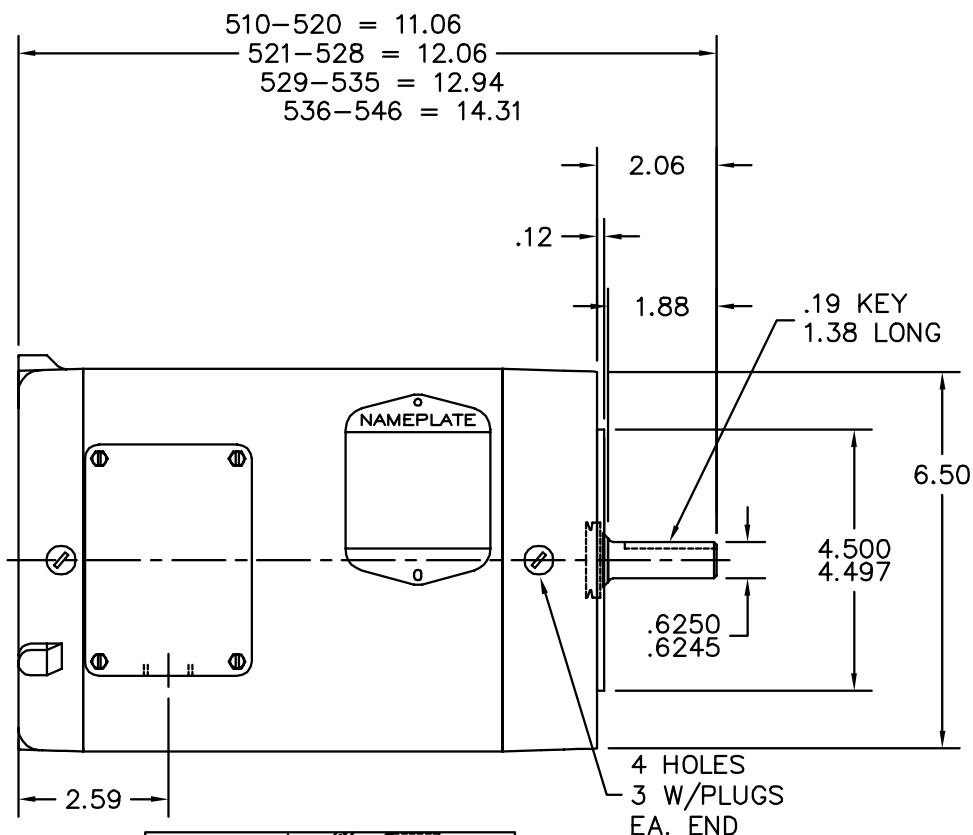


PULLEY END DETAIL

APPLY COAT OF
 RED SEALER UNDER
 BRG RET SCREW
 HEADS

APPLY COAT OF
 RED SEALER TO
 HOUSING BEFORE
 PRESSING SEAL IN

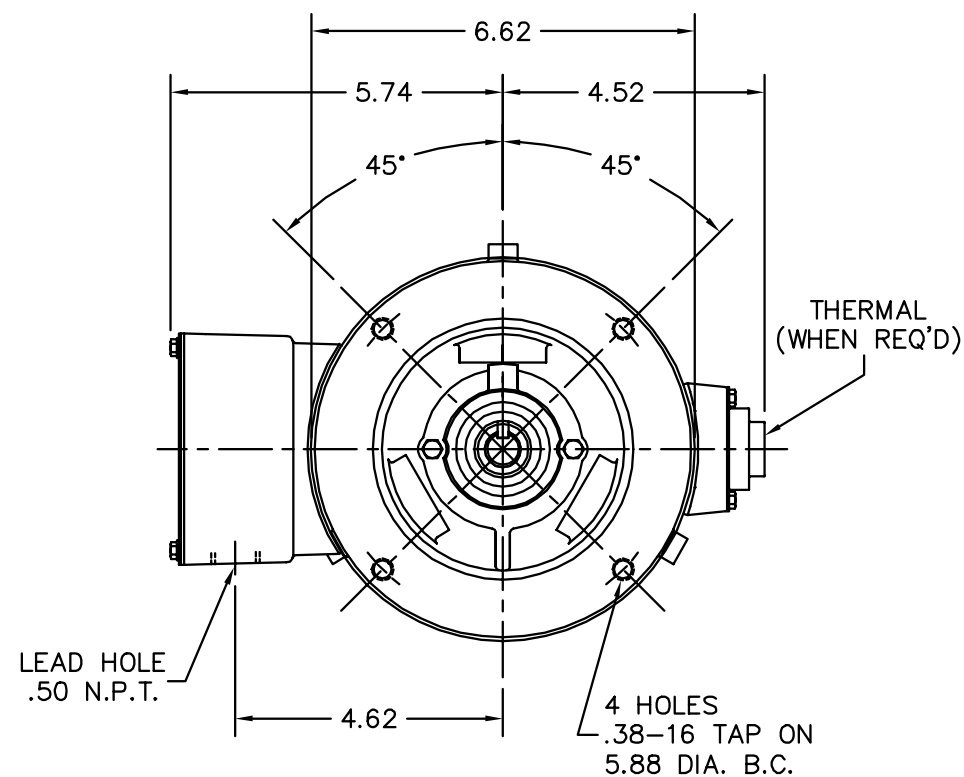

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHG'D FORSHEDA SLINGER FROM HW4600B46 TO HW4600B32

REV. LTR: D

VERSION: 04

TDR: 000000537996

FILE: \AAA\00092\985

REVISED: 08: 44: 01 04/27/2010

MTL: -

BY: ENROSP0

BALDOR • DODGE • RELIANCE

STD VERT 56C TENV 35M WD (S/P #9)

SH 1 of 1