



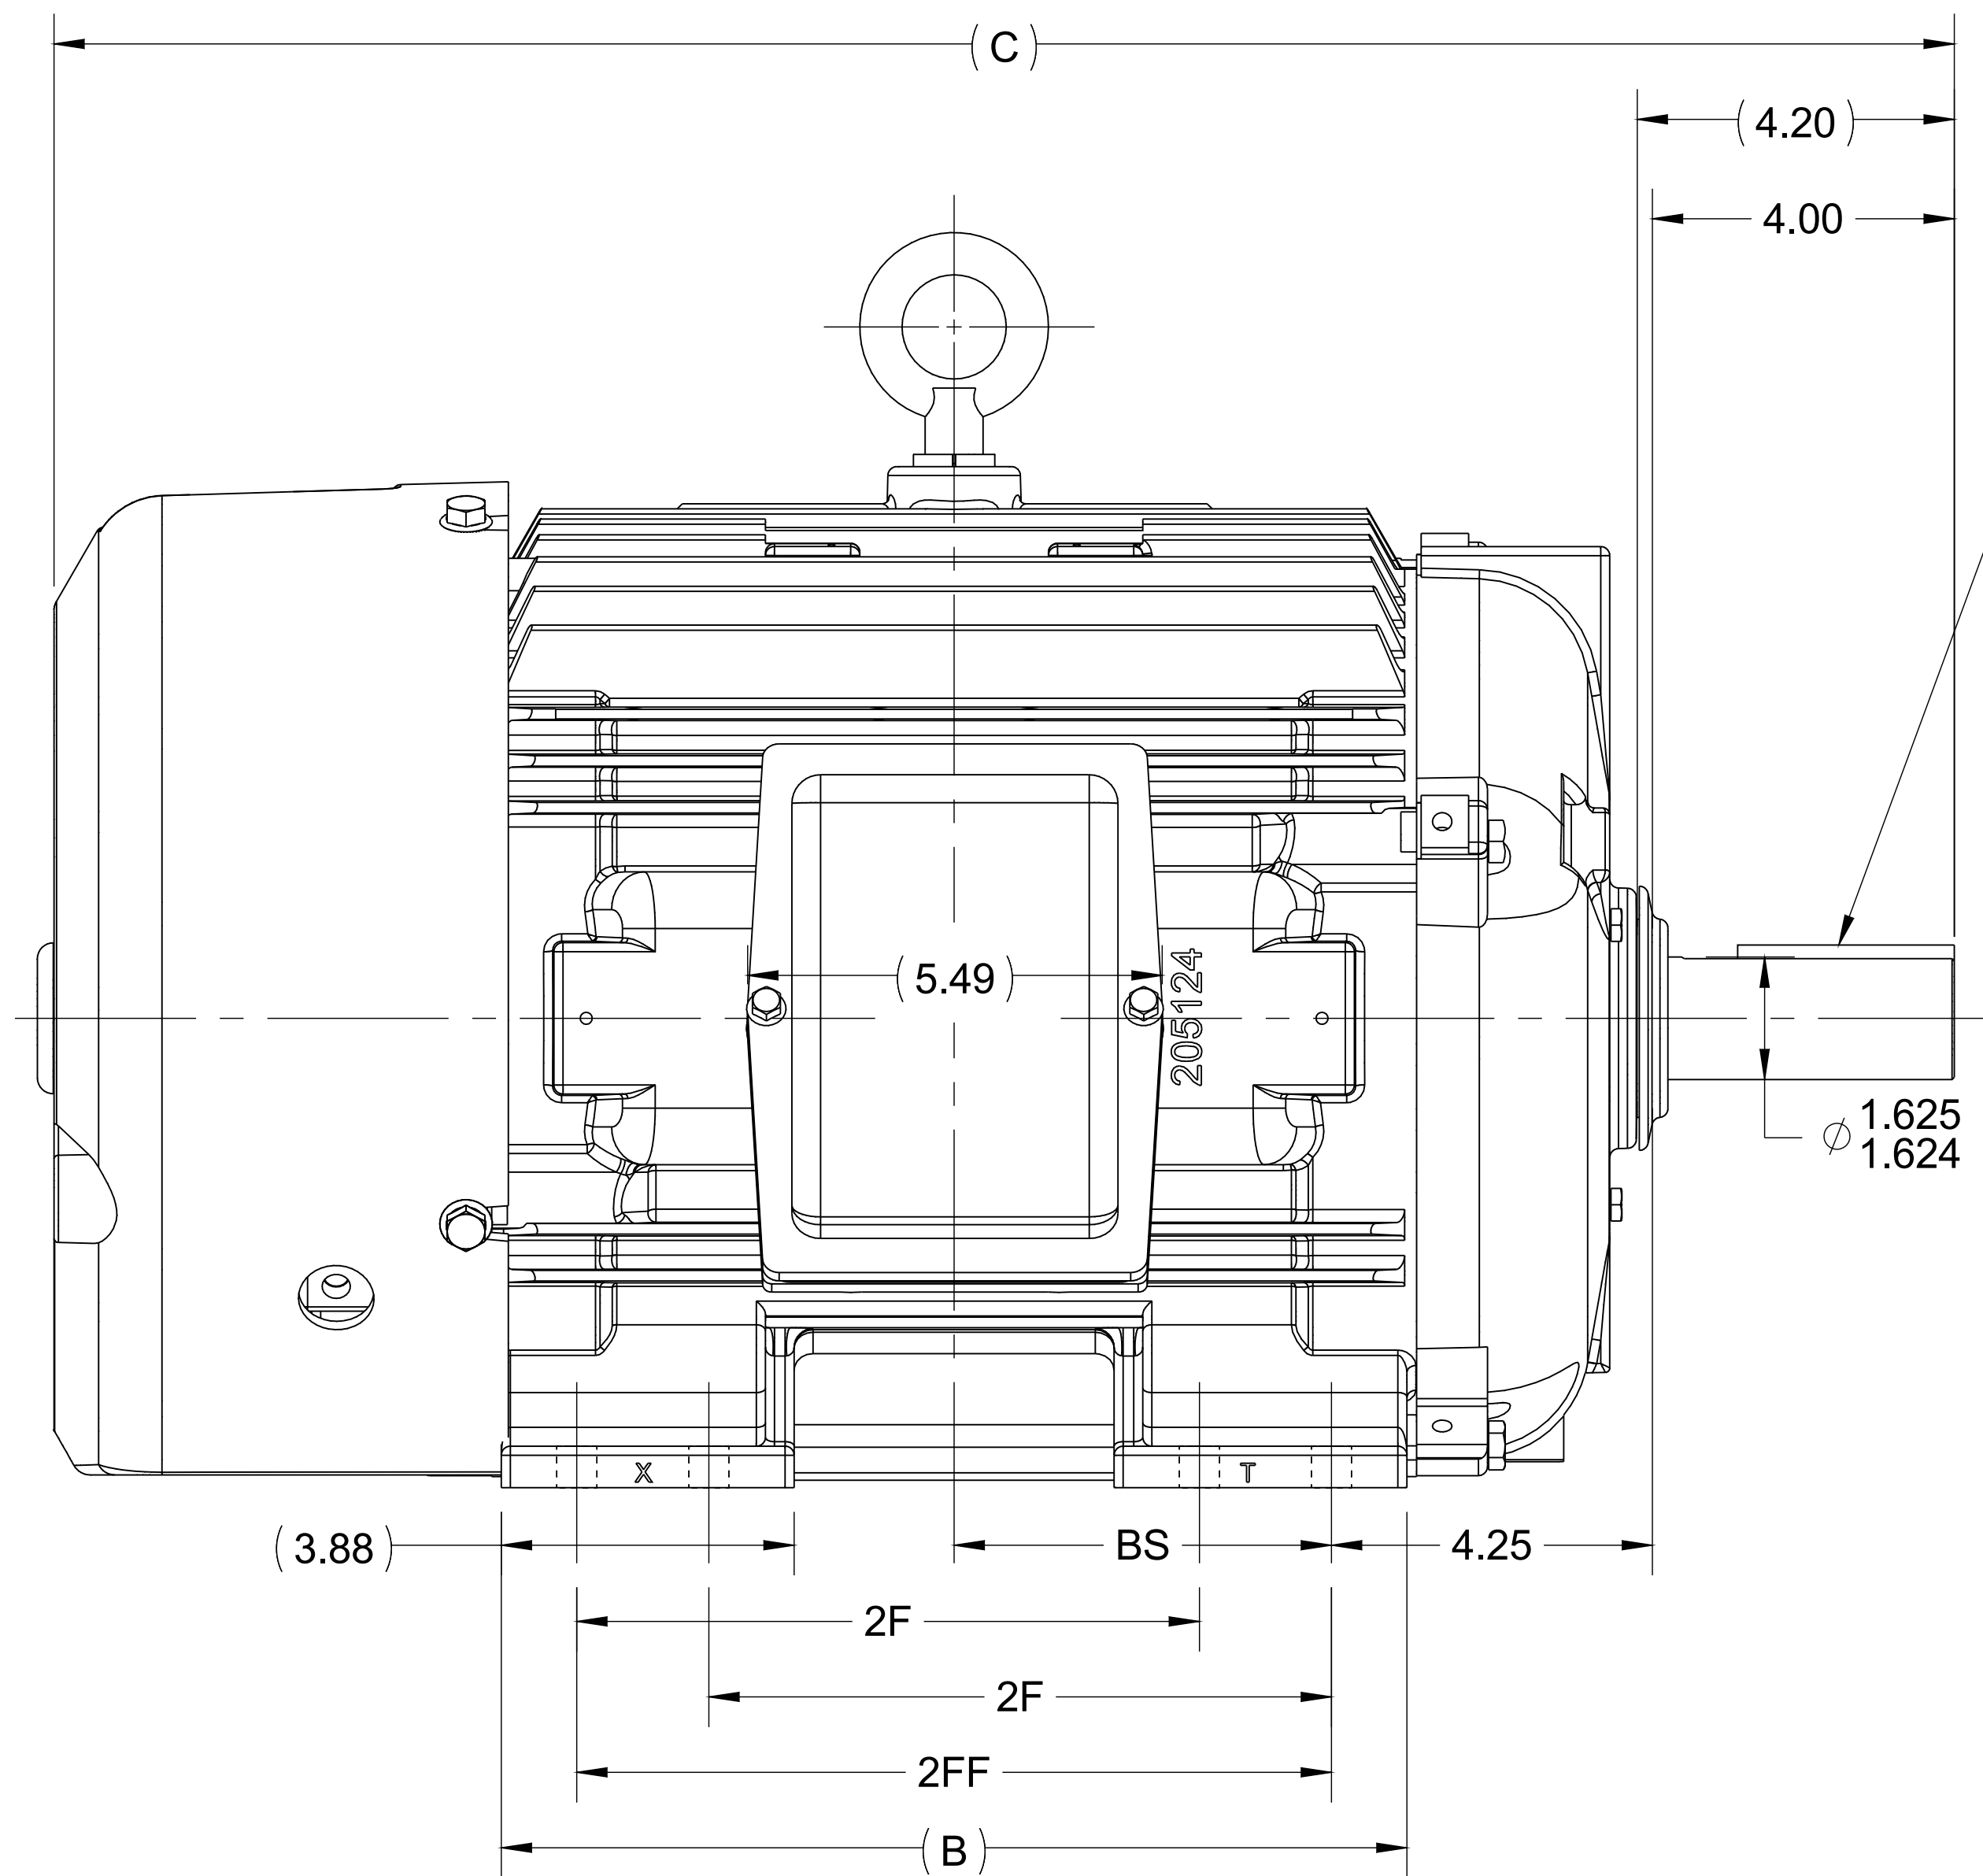


3/8 X 3/8 X 2.88
KEY

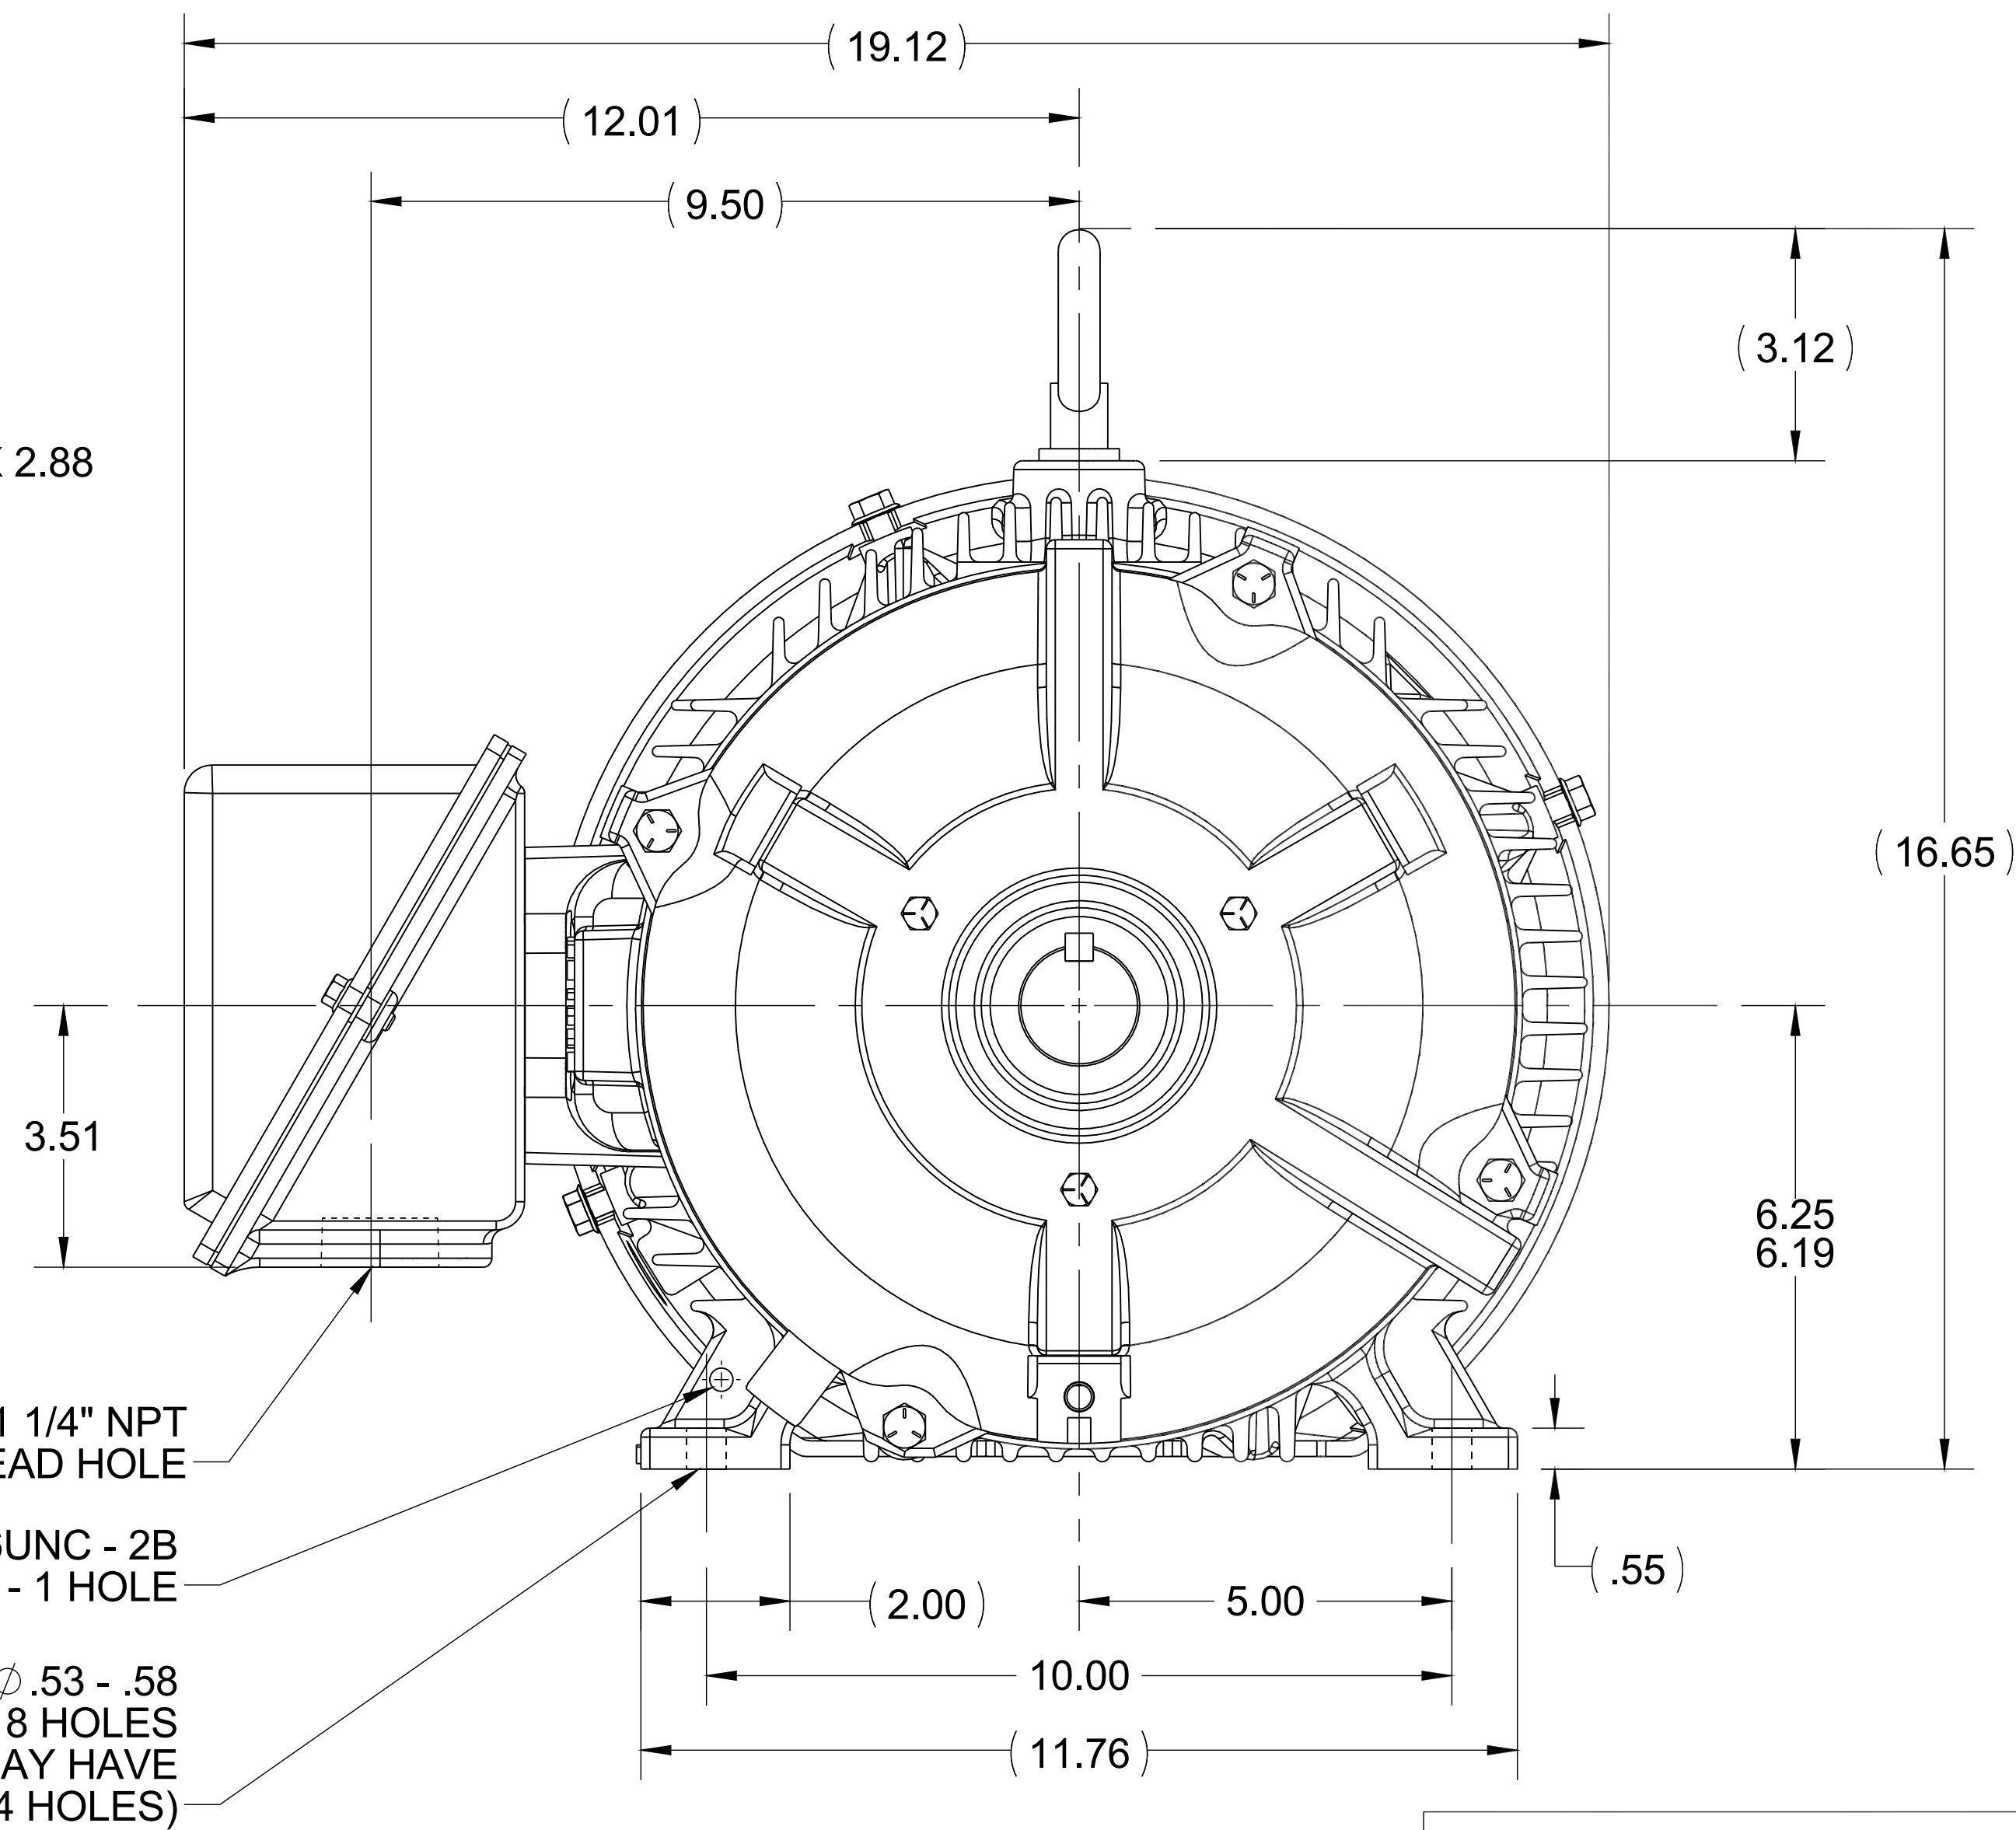

1 1/4" NPT
LEAD HOLE

3/8 - 16UNC - 2B
THRU - 1 HOLE

Ø.53 - .58
8 HOLES
(254 FR. MAY HAVE
ONLY 4 HOLES)

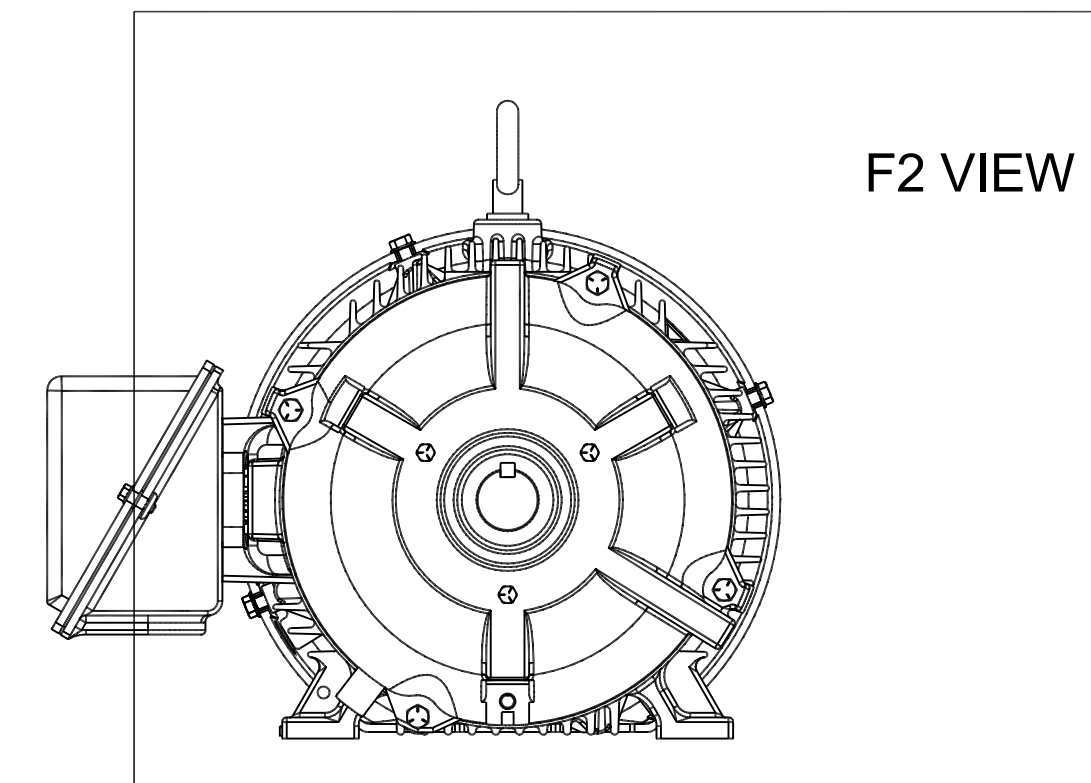

F2 VIEW

- NOTES:
1. CONDUIT BOX CAN BE ROTATED ON ITS AXIS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
 3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	2FF	BS
1050	254T	10.25	23.43	----	8.25	4.12
1225	254/256T	12.00	25.18	8.25	10.00	5.00

DRAWING REVISION	REVISION BY	DATE
D	C.OHRMUNDT	08-24-2016
ECO	APPROVED BY	DATE
ECO-0108262		
ECO DESCRIPTION		
ADDING 254 TO THE 256 DASH (254/256)		
COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.		

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
DEC.	INCH	mm	ANGLE
.X	±0.1	[±2.5]	±7° 30"
.XX	±0.03	[±0.76]	
.XXX	±0.005	[±0.127]	
.XXXX	±0.0005	[±0.0127]	
REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [.076/.381]			
CORNER FILLETS: .02 [.51]			
MACHINED SURFACES: 200 INCH 5.1 mm			
mm SHOWN IN [BRACKETS]			

DRAWN BY	
TVUE	
DATE	12-18-2013
APPROVED BY	TBROWN
DATE	12-18-2013
PROCESS/FINISH	
THIRD ANGLE PROJECTION	

		Regal Beloit America, Inc.	
DESCRIPTION			
OUTLINE			
250T FR. - TEFC - BB - STD.			
MATERIAL			
SIZE	DRAWING NUMBER		SHEET
B	SS203002		1 OF 1