



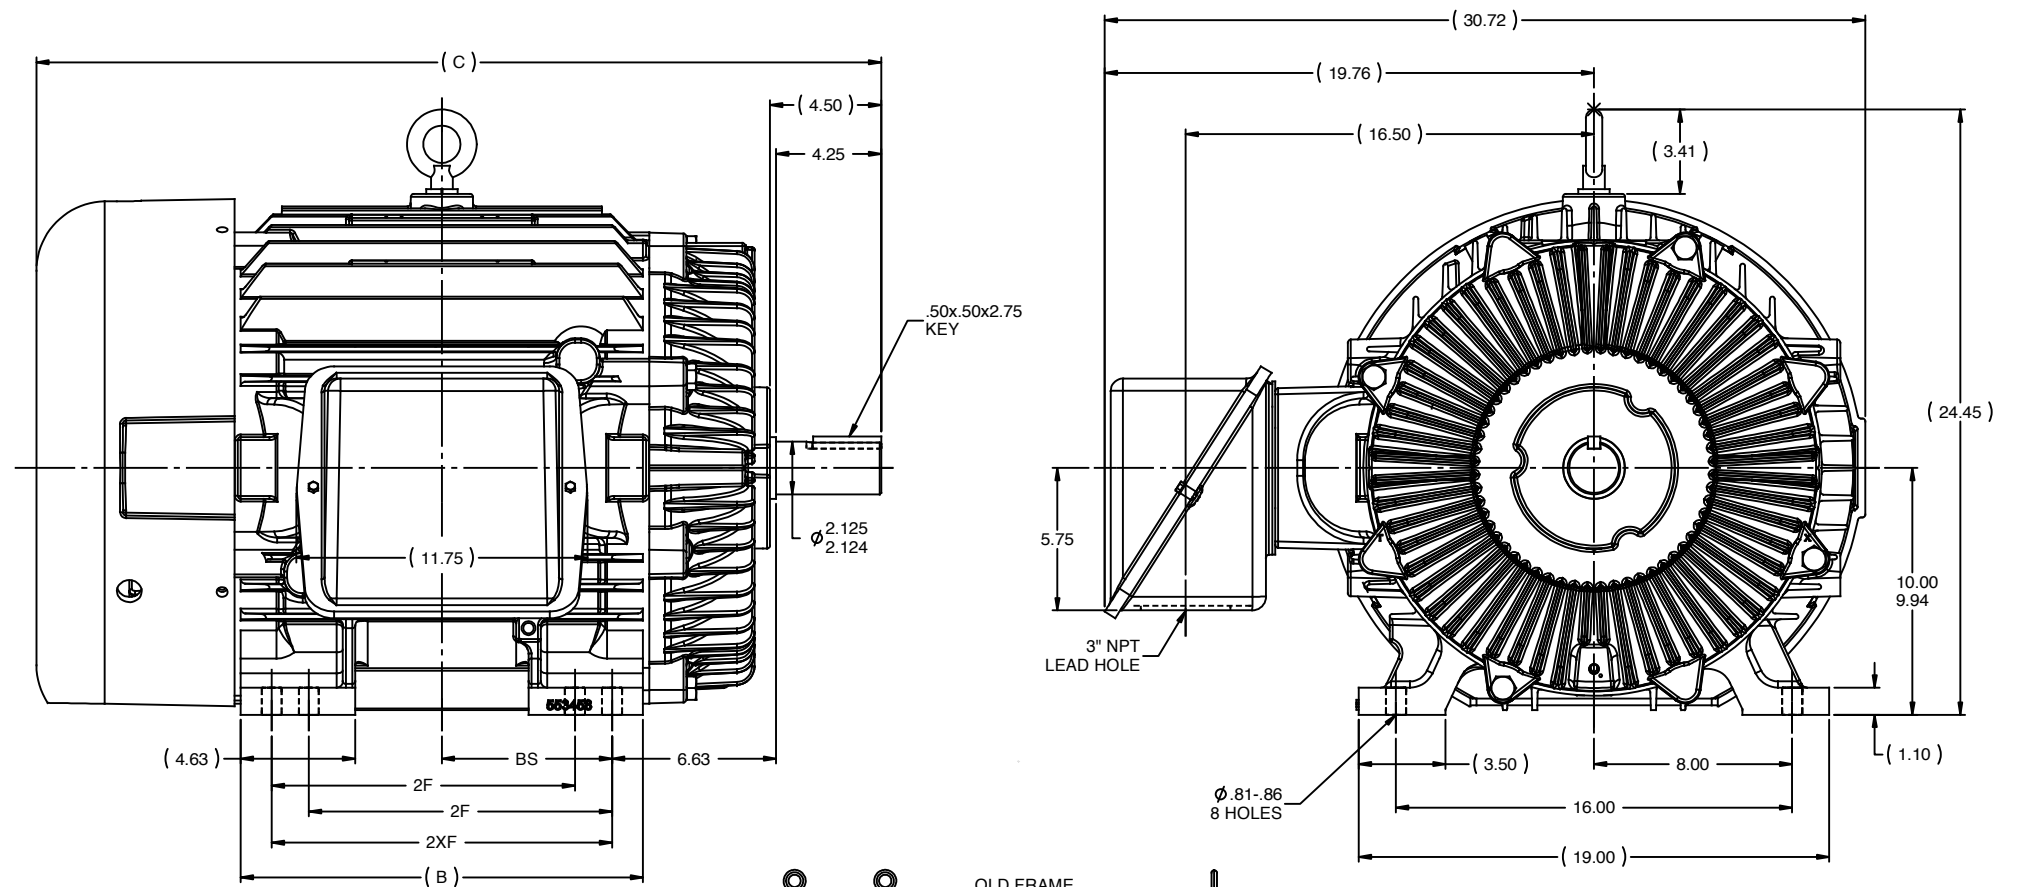

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

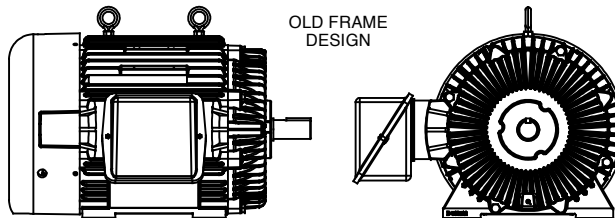

DASH	FRAME	B	C	BS	2F	2XF
1525	404TS	14.75	32.63	6.12	12.25	---
1675	404/405TS	16.25	34.13	6.88	12.25	13.75

			TOLERANCES UNLESS SPECIFIED				DRAWN TLB 05-19-1988		
8	REDRAWN IN SOLIDWORKS W/ L.W. FRAME MU98878	EDK 11/29/2010	MH	DEC			INCHES	CHK FG 05-20-1988	
7	UPDATED FRAME & ADDED 404 INFO CN27430	KL 10-25-2005		X	±.1		APPR ML 05-22-1998		
6	REDRAWN IN AUTOCAD	TAT 06-29-2004		XX	±.03	TITLE OUTLINE 400TS/US FR. - TEFC - STD.	SCALE 1:5		
5	ADDED NEMA 'O' DIM.	MRB 09-12-1996		XXX	±.005		REF		
4	REDRAWN ON CADD	TLB 05-19-1988		XXXX	±.0005		FMF		
NO	REVISION	BY & DATE	CHK	ANG	±7/30"	FINISH	PAGE OF		
THIRD ANGLE PROJECTION 			RFP	PREV			SIZE	DRAWING NO	REV
			NETWORK FILE NAME SS509125			B	SS509125		8