
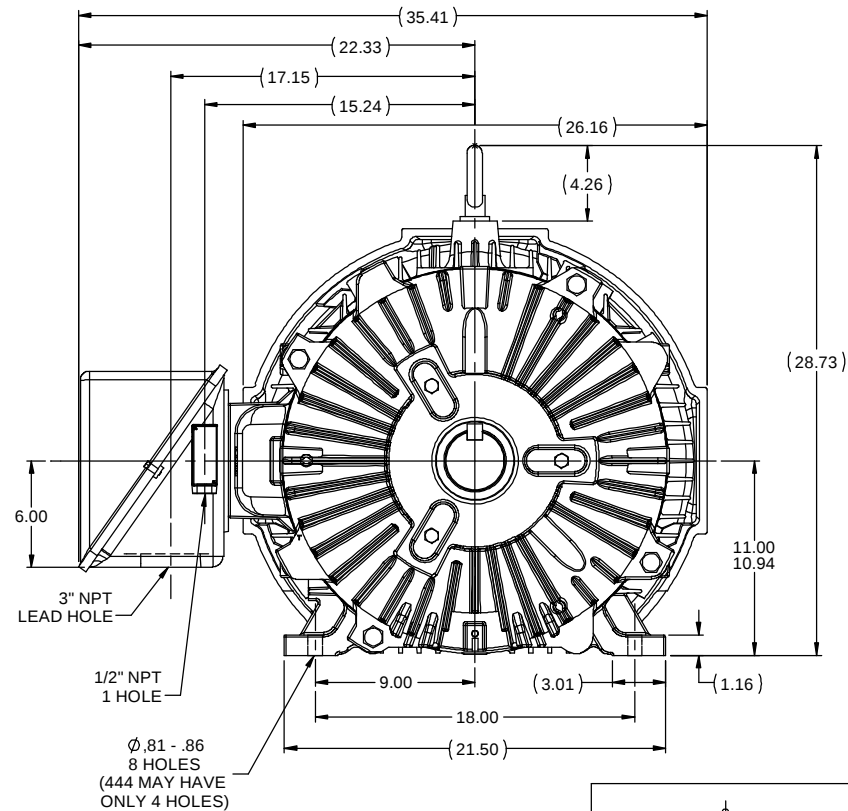


NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90 ° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180 °.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	BS	2F	2FF
1825	444T	17.75	41.35	7.25	14.50	---
2025	445T	19.75	43.35	8.25	14.50	16.50

NO	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV	SIZE	DRAWING NO	SS518130	REV
7	UPDATED FRAME / CALL OUT GROUND PROVISION ISAAC 09-0549	HV 09-17-2012	EW	DEC	INCHES						
6	REV. TO ORACLE REVISION	RWR 08-21-2007	X		±.1						
3	UPDATED DRAWING	RJW 04-18-2007	XX		±.03						
2	CHG. TO SHORT FAN GUARD DESIGN PER CN 39335	RWR 03-01-2007	XXX		±.005						
1	NEW DRAWING MU35173	KL 12-19-2000	XXXX		±.0005						
TOLERANCES UNLESS SPECIFIED											
DRAWN KL 12-19-2000											
CHK DJK 12-19-2000											
APPR DJK 12-19-2000											
SCALE 1:7											
REF											
FMF											
PAGE OF											
NETWORK FILE NAME SS518130											
THIRD ANGLE PROJECTION											
DRAWING NO SS518130											
REV 7											

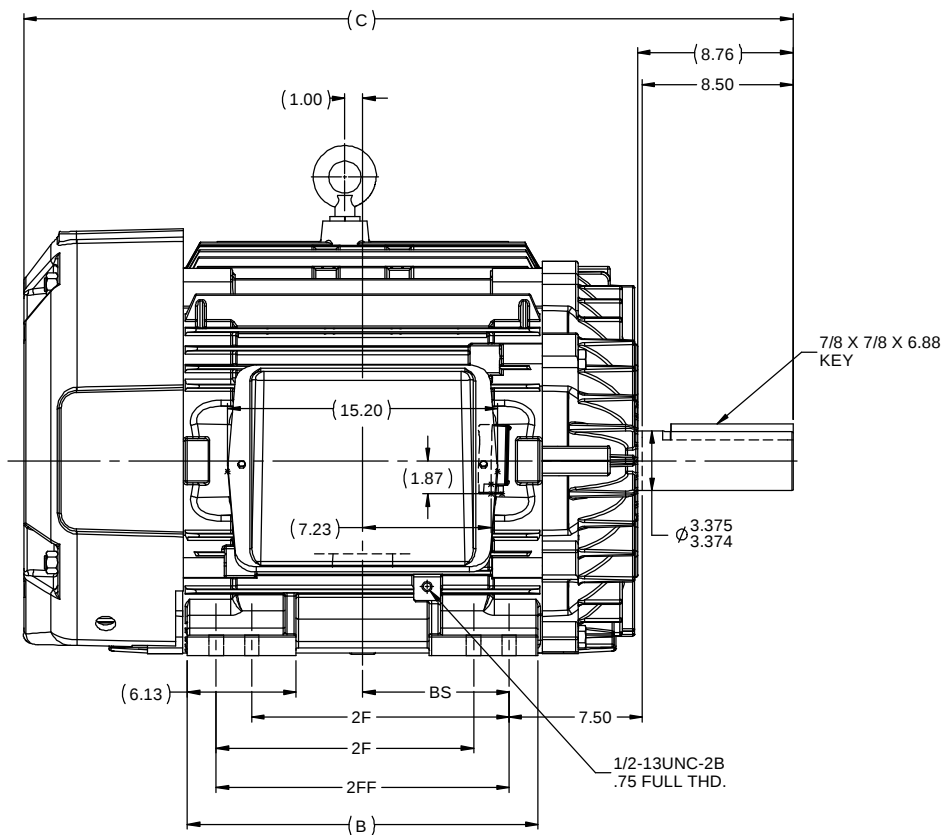

TITLE OUTLINE - CONDULET - OVERSIZE BOX
440T FR. - TEFC - TAPPED LEAD HOLE