


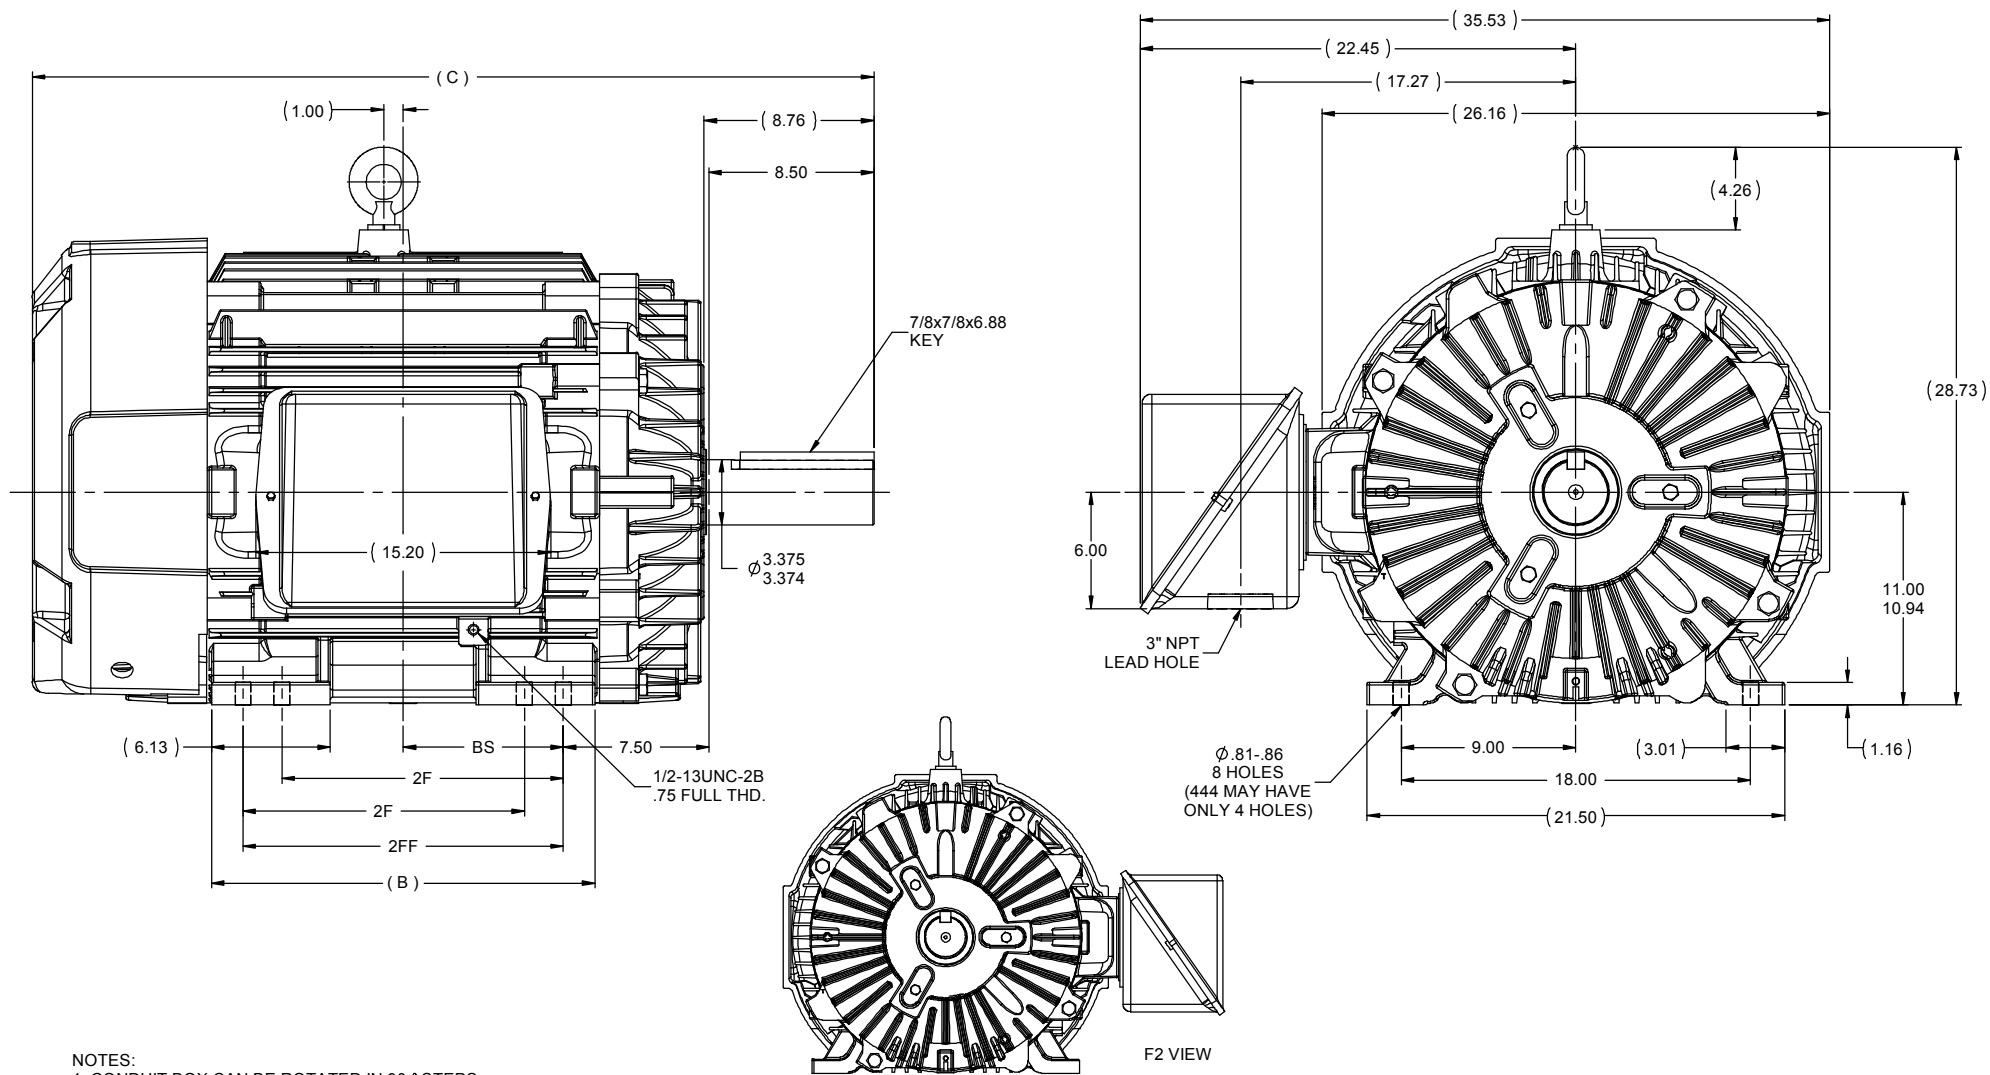

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90 ° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TUNRING FRAME 180 °
3. NAMPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	BS	2F	2FF	
1825	444T	17.75	41.35	7.25	14.50	---	
2025	444/445T	19.75	43.35	8.25	14.50	16.50	

9	UPDATED MOUNTING HOLE NOTE	HV 08-07-2012	EH	TOLERANCES UNLESS SPECIFIED		DRAWN DRS 2/24/1999
8	UPDATED FRAME TO CURRENT STD'S. ISAAC 09-5049	JJB 01-17-2012	DEC	INCHES		
7	ADDED F2 VIEW	MSG 04-21-2010	MSG	x ±.1	TITLE OUTLINE 444/445T FR. - TEFC - STD	APPR JL 2/25/1999
6	REVISED FRAME AND DASH TABLE ISAAC09-5049	TJW 04-01-2010	EH	xx ±.02		
5	UPDATED DRAWING	RJW 04-18-2007	ML	xxx ±.005	MATL	SCALE 5:32
4	CHG TO SHORT FAN GUARD DESIGN PER CN39335	RWR 02-17-2007	ML	xxxx ±.0005		
REVISION		BY & DATE	CHK	ANG ±7°30"	FINISH	REF
THIRD ANGLE PROJECTION		RFP	PREV			PAGE OF
		NETWORK FILE NAME SS517026			SIZE B	DRAWING NO SS517026
						REV 9