
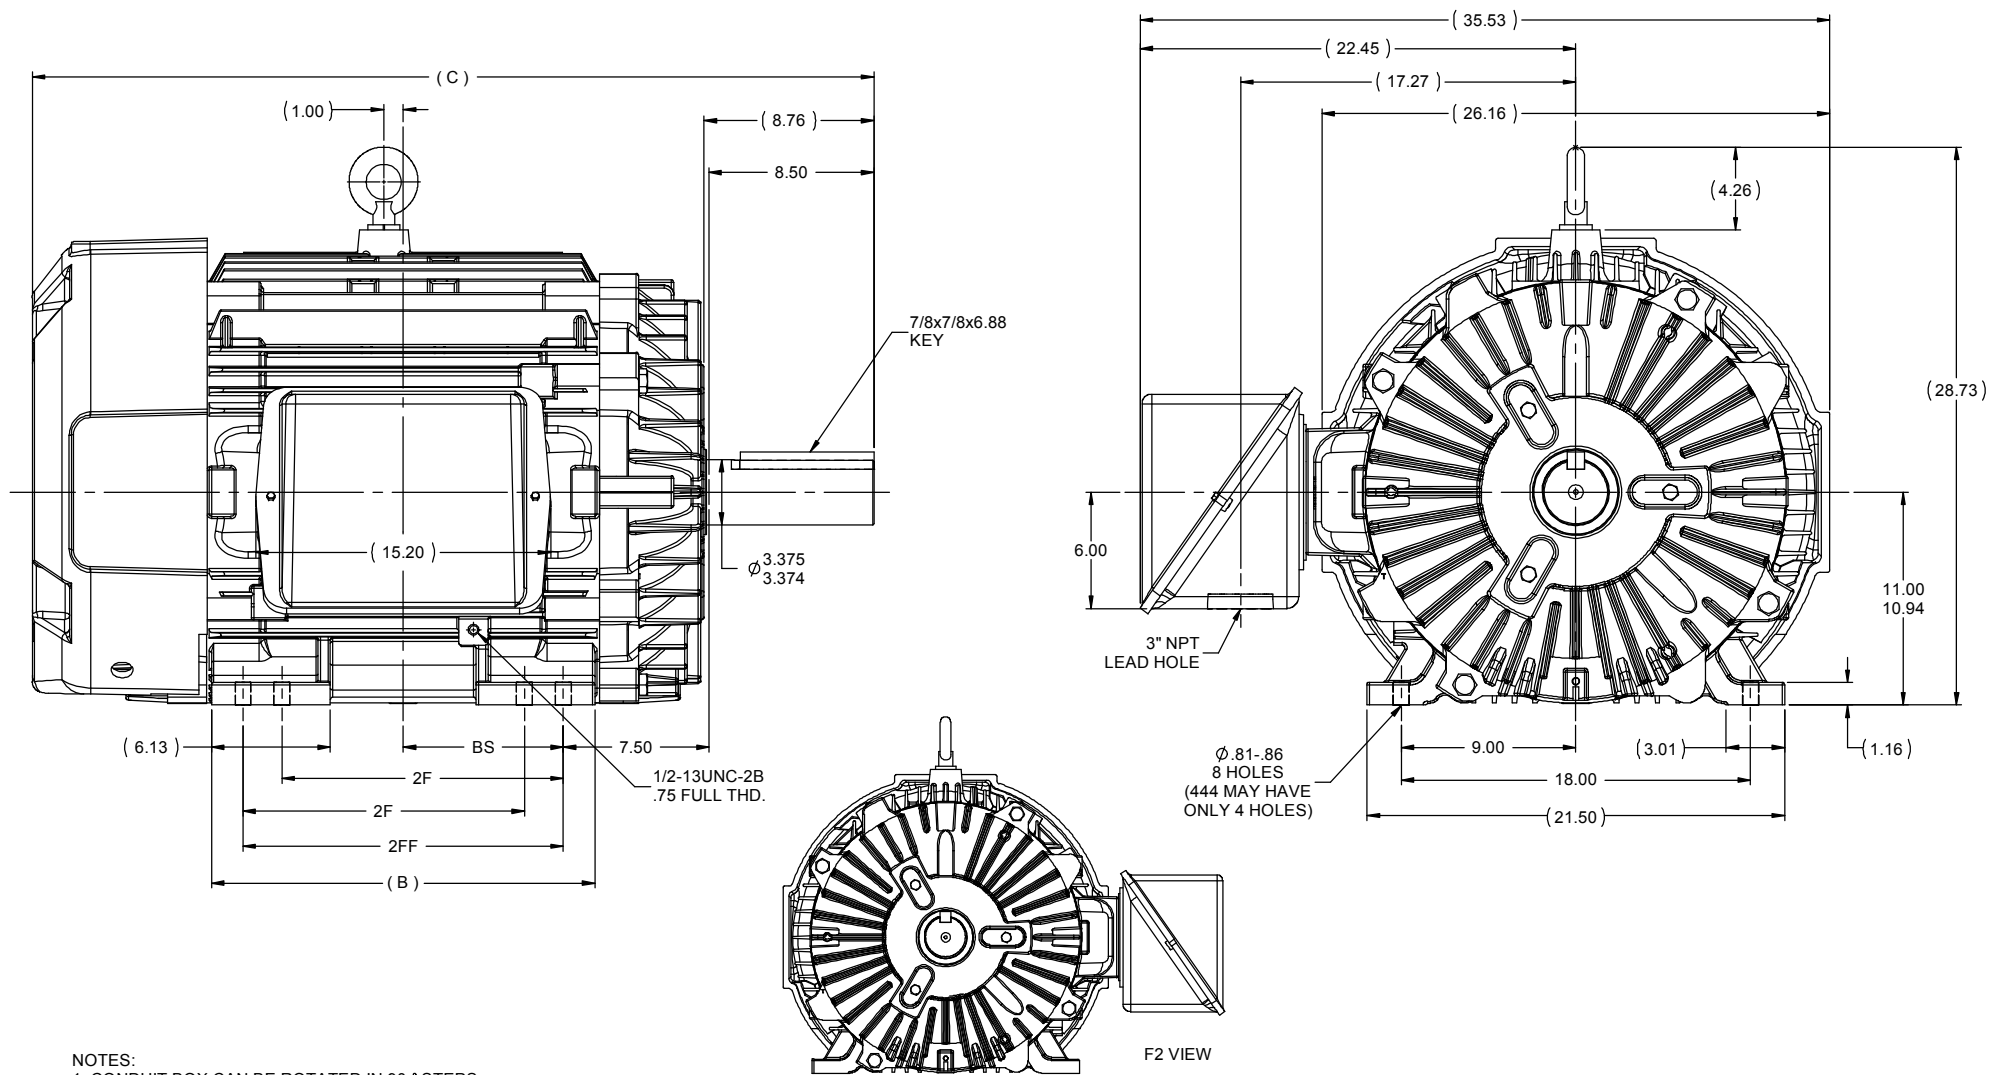





- NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90 ° STEPS.
 2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180 °
 3. NAMPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	BS	2F	2FF	
1825	444T	17.75	41.35	7.25	14.50	---	
2025	444/445T	19.75	43.35	8.25	14.50	16.50	

9	UPDATED MOUNTING HOLE NOTE		HV 08-07-2012	EH	TOLERANCES UNLESS SPECIFIED		DRAWN DRS 2/24/1999	
8	UPDATED FRAME TO CURRENT STD'S. ISAAC 09-5049		JJB 01-17-2012	DEC	INCHES		CHK ML 2/25/1999	
7	ADDED F2 VIEW		MSG 04-21-2010	MSG	±.1		APPR JL 2/25/1999	
6	REVISED FRAME AND DASH TABLE ISAAC09-5049		TJW 04-01-2010	EH	xx ±.02		SCALE 5:32	
5	UPDATED DRAWING		RJW 04-18-2007	ML	xxx ±.005	TITLE OUTLINE 444/445T FR. - TEFC - STD	REF	
4	CHG TO SHORT FAN GUARD DESIGN PER CN39335		RWR 02-17-2007	ML	xxxx ±.0005		FMF	
NO	REVISION		BY & DATE	CHK	ANG ±7°30"	FINISH	PAGE OF	
THIRD ANGLE PROJECTION			RFP		PREV	SIZE B	DRAWING NO SS517026	REV 9
			NETWORK FILE NAME		SS517026			