


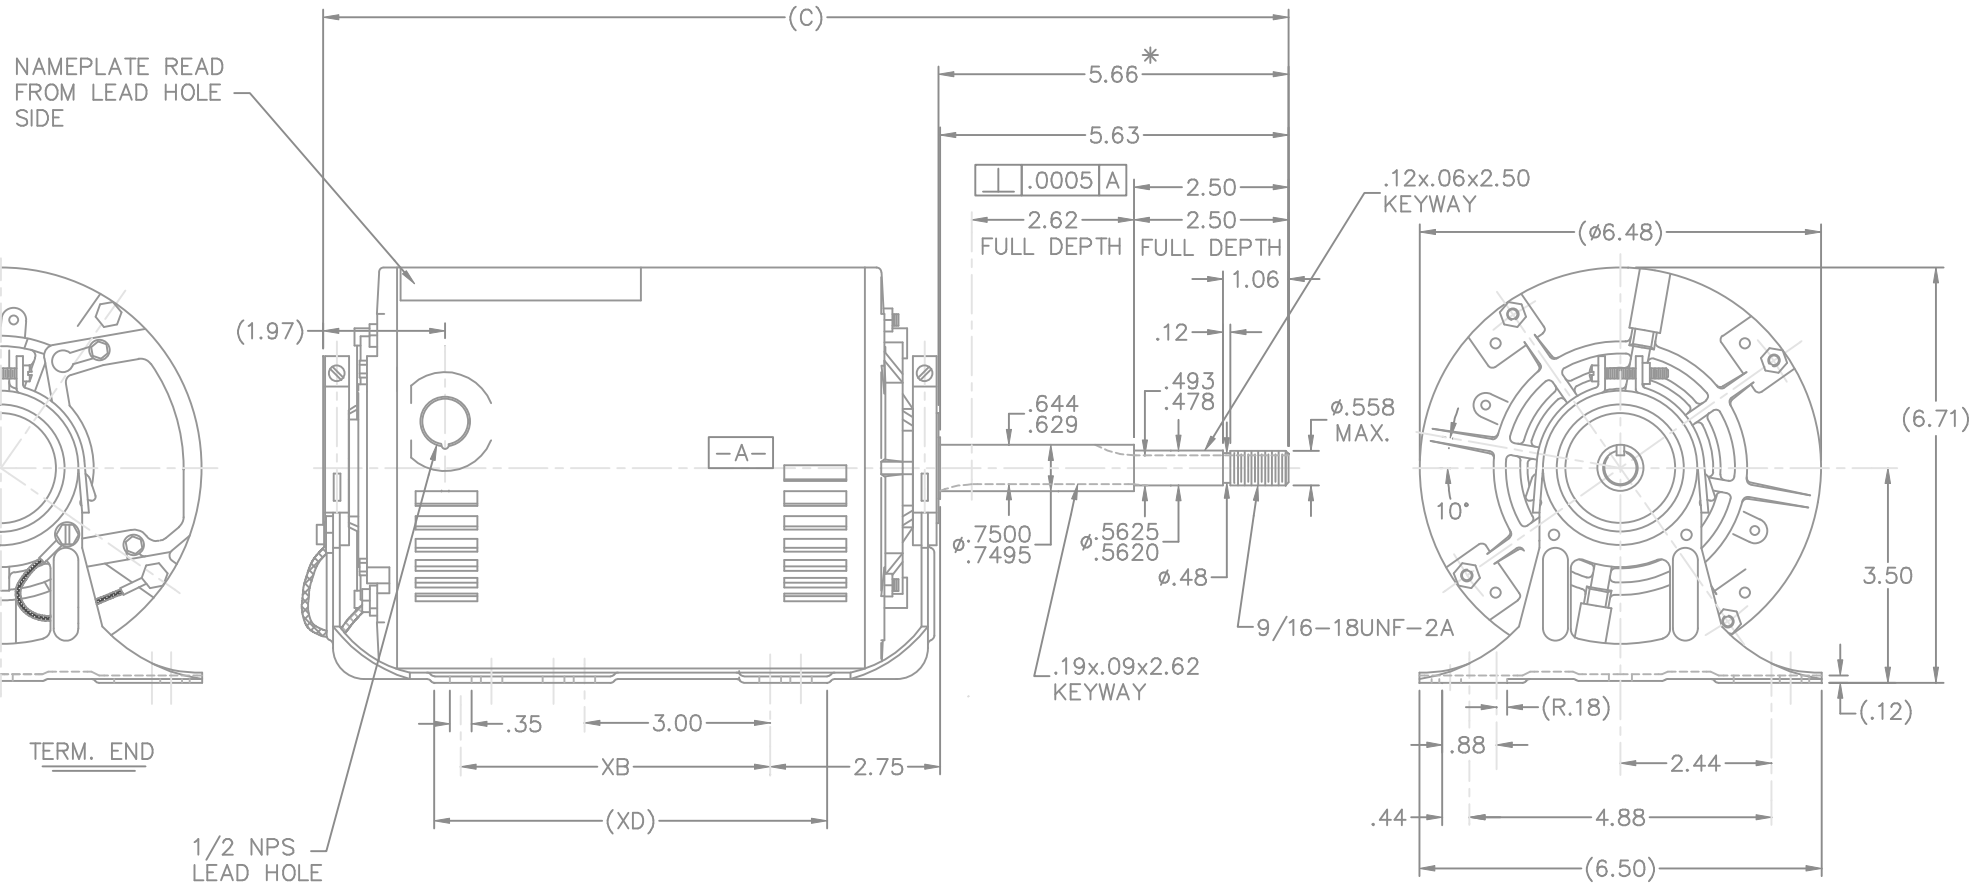

NOTE:

1. MOTOR MUST BE ROTATED TO .75" STRIP SOCKET CLEARANCE FOR GROUND SCREW, MAXIMUM (10 DEGREES).

* DIM. IS FROM RESIL. RING ENDCAP TO END OF SHAFT

DASH	FR.	C	XB	XD
606	56-60	14.10	0	5.00
656	56-65	14.60	0	5.00
706	56-70	15.10	0	6.00
756	56-75	15.60	5.00	6.50

					TOLERANCES UNLESS SPECIFIED		DRAWN KL 10-05-1994				
					DEC. INCHES		CHK ML 10-06-1994				
4	REDRAWN IN AUTOCAD	TAT 06-13-2005	ML	.X ±.1			APPD TG 10-11-1994				
3	UPDATED GROUND LEAD GEOMETRY CN 28430	DRS 10-11-1999		.XX ±.03	TITLE OUTLINE		SCALE 1=2				
2	ADDED NOTE CN 24378	PGK 06-09-1997		.XXX ±.005			REF				
1	NEW DRAWING 4203447	KL 10-18-1994		.XXXX ±.0005	MAT'L		FMF				
NO.	REVISION	BY & DATE	CHK	ANG ±7'30"	FINISH		PREV				
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT.					RFP	CAD FILE 100946	SIZE B	DRAWING NO. 100946	PAGE 4	OF	REV.
					DIST WP						