
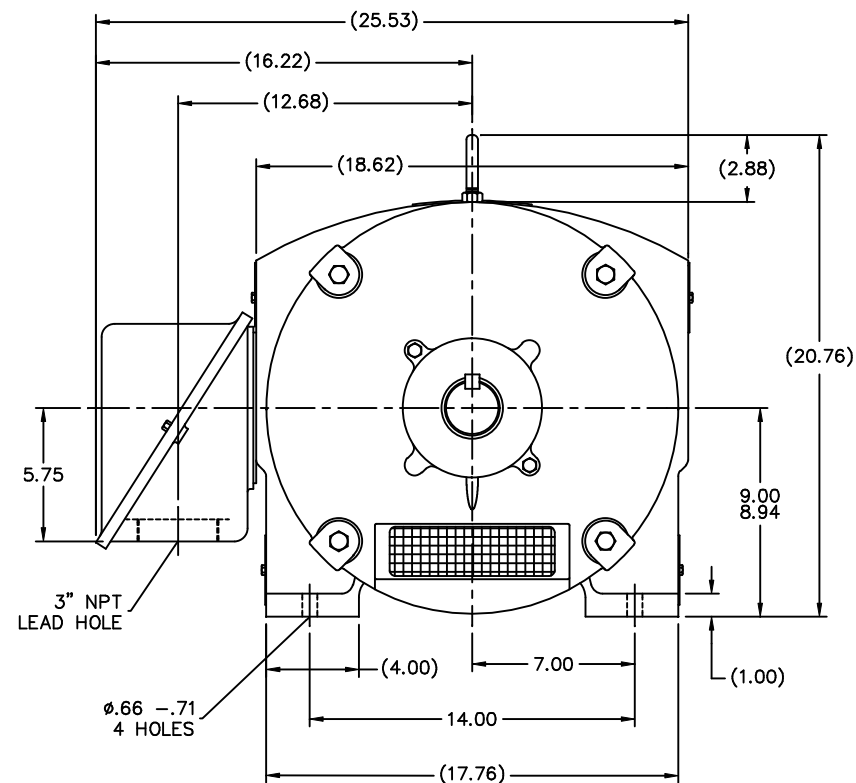


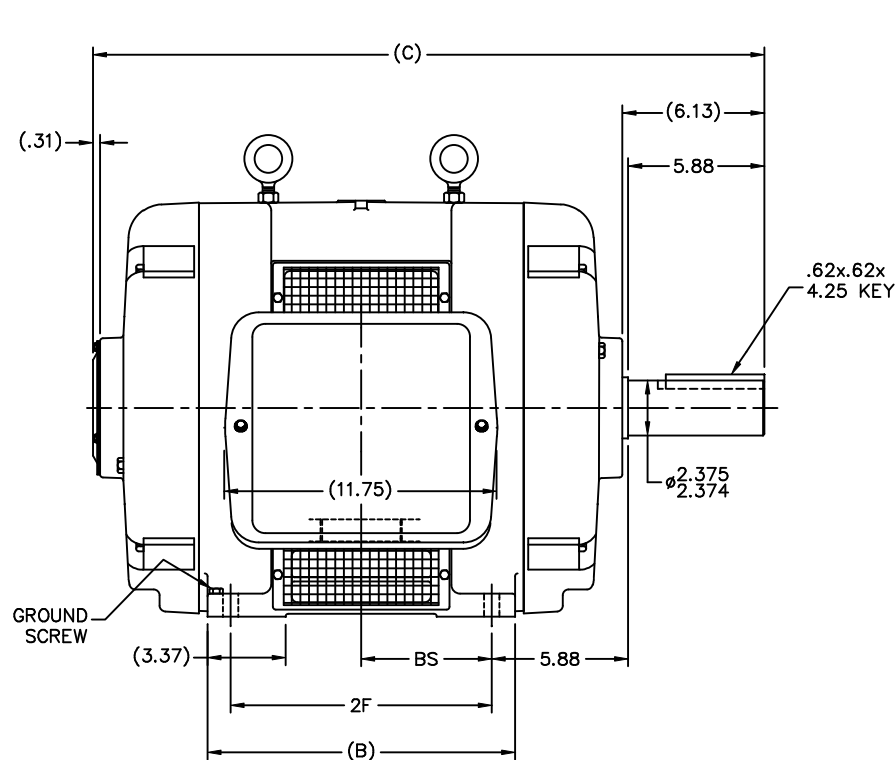

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

(B-SS509462)

3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.										TOLERANCES UNLESS SPECIFIED			DRAWN DA 02-06-1991								
										DEC. INCHES			CHK TB 02-06-1991								
										.X ±.1			APPD ML 02-06-1991								
3 UPDATED FRAME AND CONDUIT BOX CN 24390						KL 07-12-2005		.XX ±.03		TITLE OUTLINE - GRD. SCREW - SCREENED 360T FR. - DR.PR. - OIL WELL DUTY			SCALE 3=16								
2 REDRAWN IN AUTOCAD						TAT 06-13-2005 ML .XXX ±.005						REF									
1 NEW DRAWING CN 13005						DA 02-06-1991 .XXXX ±.0005		MAT'L				FMF									
DASH	FRAME	B	C	2F	BS	NO. REVISION		BY & DATE		CHK	ANG	±7°30"	FINISH	PREV							
1400	364T	13.25	28.93	11.25	5.62	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT									RFP		CAD FILE SS513938	SIZE	DRAWING NO.	PAGE OF	REV.
1500	365T	14.25	29.93	12.25	6.12										DIST	WA		B	SS513938	3	

DASH	FRAME	B	C	2F	BS
1400	364T	13.25	28.93	11.25	5.62
1500	365T	14.25	29.93	12.25	6.12