


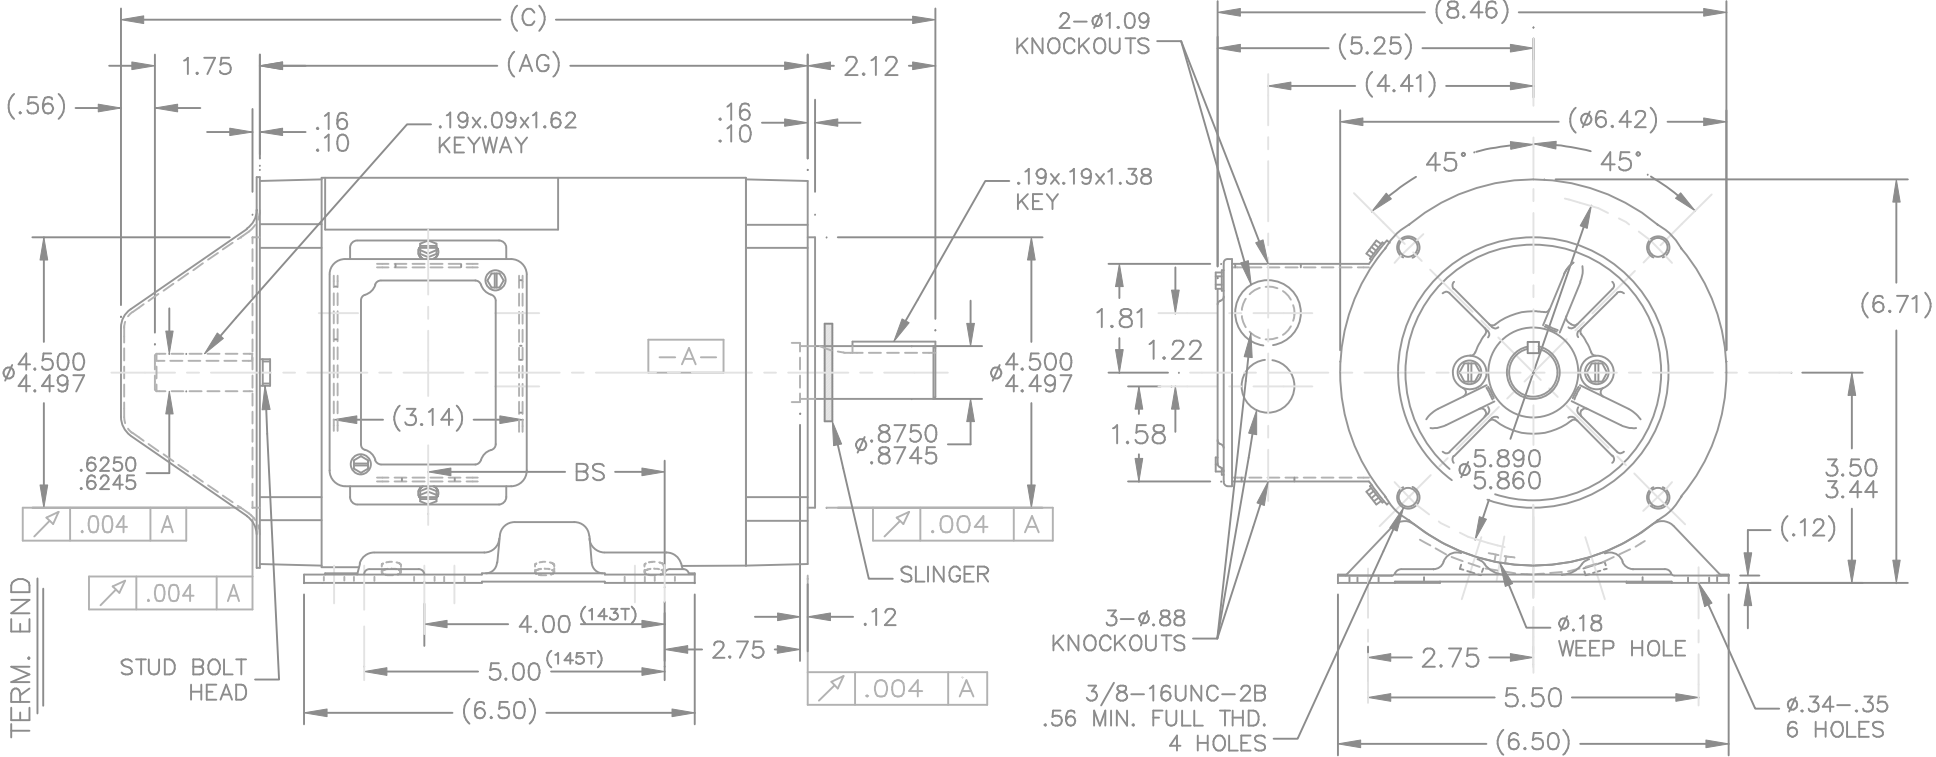

NOTE:

1. CONDUIT BOX CAN BE ROTATED 180°.
2. REMOVABLE BASE.
3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FR.	C	AG	BS	DASH	FR.	C	AG	BS	DASH	FR.	C	AG	BS
656	140	13.04	8.61	2.93	806	140	14.54	10.11	4.43	956	140	16.04	11.61	5.93
706	140	13.54	9.11	3.43	856	140	15.04	10.61	4.93					
756	140	14.04	9.61	3.93	906	140	15.54	11.11	5.43					

				TOLERANCES UNLESS SPECIFIED			DRAWN DT 10-20-1995					
				DEC.	INCHES		CHK DA 10-24-1995					
				.X	±.1		APPD EAB 10-31-1995					
4	ADDED SLINGER TO REAR SHAFT EXT. CN 20775-814	MRB 01-08-1996		.XX	±.03		TITLE OUTLINE				SCALE 5=16	
3	CORRECTED BS DIM. CN 20775-732	BRH 11-27-1995		.XXX	±.005	140T FR. - BB - TENV - C'FACE - 3ø				REF		
2	ADDED STUD BOLT HEAD LOCATION 4292545	BLR 11-14-1995		.XXXX	±.0005	MAT'L.				FMF		
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH				PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT			RFP		CAD FILE 104059			SIZE	DRAWING NO.	PAGE	OF	REV.
			DIST WP					A	104059			