


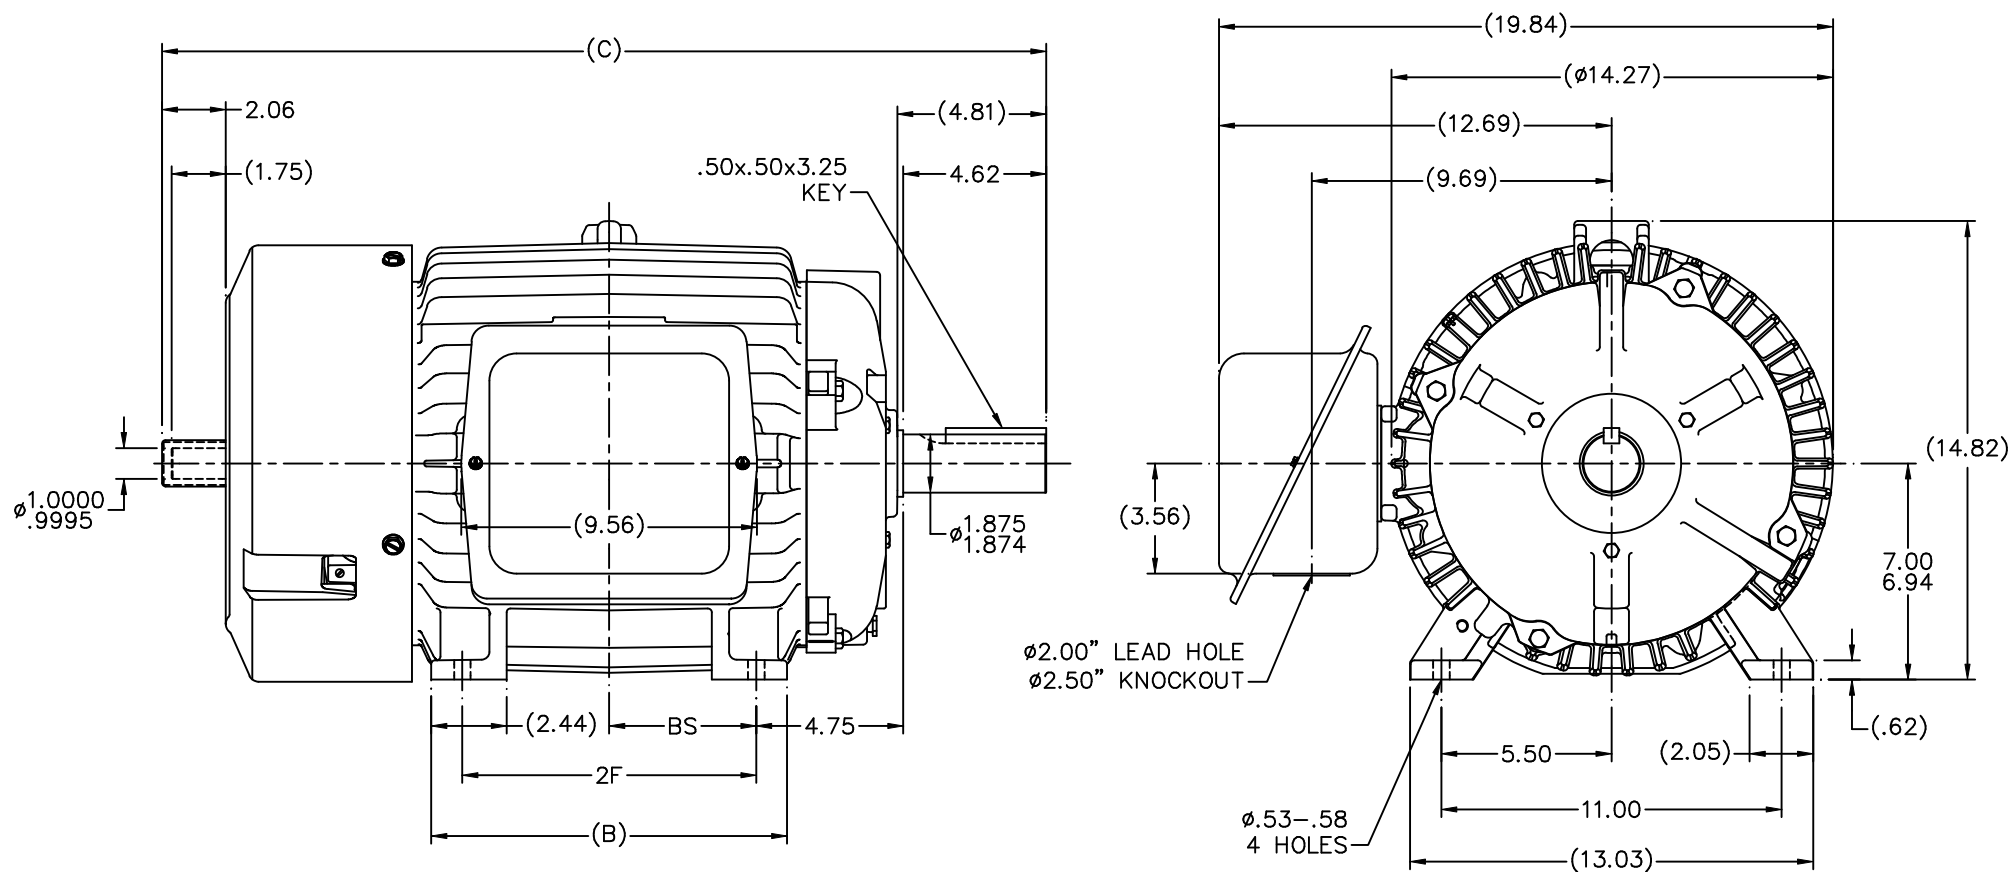

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

(B-SS311038)

SIDE OF MOTOR.										TOLERANCES UNLESS SPECIFIED				DRAWN KL 10-26-2000			
										DEC. INCHES				CHK DJK 10-27-2000			
										.X ±.1				APPD DJK 10-27-2000			
										.XX ±.03		TITLE OUTLINE – ENCODER PROV. 280T FR. – TEFC – TFPA – 11.00" LAM.		SCALE 1=4			
						2 CORRECTED C'BOX HOLE NOTE CN29200-1454		HLB 02-16-2001		.XXX ±.005				REF			
						1 NEW DRAWING MU34251		KL 10-30-2000		.XXXX ±.0005		MATL		FMF			
						NO. REVISION		BY & DATE		CHK ANG ±7/30"		FINISH		PREV			
						THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT						RFP		CAD FILE SS311075		SIZE B DRAWING NO. SS311075 PAGE OF 2	
												DIST LB					
DASH	FRAME	B	C	2F	BS												
1275	284T	11.50	28.58	9.50	4.75												
1425	286T	13.00	30.08	11.00	5.50												

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT.