

.313^{+0.002}/_{.000}

1.201^{+0.000}/_{-.015}

1.375^{+0.000}/_{.001}

5.24^{+0.00}/_{-.06}

1.00" NPT CONDUIT

8x0.44" HOLES

- NOTES:
 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

210T TEXP FRAME

MDSL0041-03

TOSHIBA
 TOSHIBA INTERNATIONAL CORPORATION

TOLERANCES

.X	.1
.XX	.03
.XXX	.005
.XXXX	.0005

MAXIMUM MOTOR WEIGHT

lbs.
kgs.

0	FIRST ISSUE	M. O'DOWD	07/11/12		
NO	REVISION	DRAWN BY	DATE	CHECK	



DRAWN BY: M. O'DOWD
 CHECK BY: _____
 APPROVED BY: _____
 www.toshiba.com/ind

TOSHIBA INTERNATIONAL CORPORATION
Industrial Division / Houston Motor Plant

**SQUIRREL CAGE INDUCTION MOTOR
 PERFORMANCE SPECIFICATIONS**

INDEX	MPCF-1033
SHEET NO.	1 of 1
ISSUED	11/08/96
SUPERSEDES	10/06/95
REVISION	1
WRITTEN BY	R. EVANS
APPROVED BY	<i>Jay Bugbee</i>

Customer Tag:

CUSTOMER:
 TIC SR No.:
 Customer PO:

MOTOR NAMEPLATE DATA

H.P.: 7.5	VOLTS: 575	3 Ø / 60	Hz	S. RPM: 1800
FRAME: 213T	ENCL: TEFC	FLAMPS: 7.2		FLRPM: 1760
FORM: FBK1XX	S.F.: 1.15	NEMA DESIGN: B		INSUL CLASS: F
TYPE: IKKH	AMB.: 40C	CODE: H		DUTY: CONT.
MODEL No.: Y754XPEC41A		kW: 5.5		Serial No.:
NOM. EFF.: 91.7	MIN. EFF.:	P.F.: 79.0		

AMPERAGE Locked Rotor: 47	TORQUES FULL LOAD (lb-ft.): 11.3 LOCKED ROTOR (%): 231 BREAK DOWN (%): 324	** BEARINGS: Drive End: 6308UUCM Opposite Drive End: 6308UUCM
--	---	--

EFFICIENCY (%) FULL LOAD: 89.7 3/4 LOAD: 89.4 1/2 LOAD: 87.6	POWER FACTOR (%) FULL LOAD: 87.4 3/4 LOAD: 85.3 1/2 LOAD: 79.3
---	---

ALL CHARACTERISTICS ARE AVERAGE EXPECTED VALUES BASED UPON RATED VOLTAGE, FREQUENCY AND SINEWAVE POWER INPUT.

* TEMPERATURE RISE WILL BE CONSISTENT WITH INSULATION, AMBIENT AND SERVICE FACTOR AS DEFINED BY NEMA-MG-12.43 OR -20.40.

** BEARINGS ARE THE ONLY RECOMMENDED SPARE PART(S).

CERTIFIED BY:
DATE:

TOSHIBA INTERNATIONAL CORPORATION
Industrial Division / Houston Motor Plant

**SQUIRREL CAGE INDUCTION MOTOR
 PERFORMANCE SPECIFICATIONS**

INDEX	MPCF-1033
SHEET NO.	1 of 1
ISSUED	11/08/96
SUPERSEDES	10/06/95
REVISION	1
WRITTEN BY	R. EVANS
APPROVED BY	<i>Jay Bugbee</i>

Customer Tag:

CUSTOMER:
 TIC SR No.:
 Customer PO:

MOTOR NAMEPLATE DATA

H.P.: 7.5	VOLTS: 575	3 Ø / 60	Hz	S. RPM: 1800
FRAME: 213T	ENCL: TEFC	FLAMPS: 7.8		FLRPM: 1760
FORM: FBK1XX	S.F.: 1.15	NEMA DESIGN:		INSUL CLASS: F
TYPE: IKKH	AMB.: 40C	CODE: H		DUTY: CONT.
MODEL No.: Y754XPEC41A		kW: 5.5		Serial No.:
NOM. EFF.: 91.7	MIN. EFF.:	P.F.: 79.0		

AMPERAGE Locked Rotor: 50	TORQUES FULL LOAD (lb-ft.): 22.4 LOCKED ROTOR (%): 275 BREAK DOWN (%): 348	** BEARINGS: Drive End: 6308UUCM Opposite Drive End: 6308UUCM
--	---	--

EFFICIENCY (%) FULL LOAD: 91.8 3/4 LOAD: 91.0 1/2 LOAD: 88.6	POWER FACTOR (%) FULL LOAD: 79.7 3/4 LOAD: 75.4 1/2 LOAD: 65.9
---	---

ALL CHARACTERISTICS ARE AVERAGE EXPECTED VALUES BASED UPON RATED VOLTAGE, FREQUENCY AND SINEWAVE POWER INPUT.

* TEMPERATURE RISE WILL BE CONSISTENT WITH INSULATION, AMBIENT AND SERVICE FACTOR AS DEFINED BY NEMA-MG-12.43 OR -20.40.

** BEARINGS ARE THE ONLY RECOMMENDED SPARE PART(S).

CERTIFIED BY:
DATE:

TOSHIBA

Reliability in Motion

TOSHIBA INTERNATIONAL CORPORATION

INDUSTRIAL DIVISION

PO BOX 40906

HOUSTON TX 77240

(713) 466-0277

(800) 231-1412

FAX (713) 466-8773

SPARE PARTS (RECOMMENDED)

OTHER THAN THE GREASE USED FOR RE-GREASABLE BEARINGS, **TOSHIBA** ADVISES THAT THERE ARE NO "USE" PARTS. THE ONLY INSURANCE SPARES THAT **TOSHIBA** SUGGESTS FOR THESE SQUIRREL CAGE INDUCTION MOTORS ARE INDUSTRY STANDARD, AND COMMERCIALY AVAILABLE ANTI-FRICTION BEARINGS, AS NOTED BELOW.

MOTOR COMPONENTS (SUCH AS TERMINAL BOXES, FAN COVERS, MACHINED PARTS) ARE AVAILABLE UPON SPECIAL REQUEST. IN THIS CASE, PLEASE ADVISE OUR ORDER ENTRY DEPARTMENT THE MODEL AND SERIAL NUMBERS (FOUND ON THE MOTOR NAMEPLATE) , AND A DESCRIPTION OF THE COMPONENT REQUIRED. THEY WILL THEN FURNISH THE CURRENT PART NUMBER, PRICE AND AVAILABILITY.

(NOTE: OUR INTERNAL PART NUMBERS ARE SUBJECT TO CHANGE WITHOUT NOTICE, AND ARE NOT PUBLISHED).

PLEASE ADVISE IF YOU HAVE ANY QUESTIONS.


CUSTOMER:
PURCHASE ORDER #
Customer Tag:

TOSHIBA FILE #
MODEL # **Y754XPEC41A**
HP / RPM / ENCL / FRAME: **7.5** / **1800** / **TEFC** / **213T**
DRIVE END BEARING: **6308UUCM**
OPPOSITE DRIVE END BEARING: **6308UUCM**


Prepared By:
Date:

Motor Connection Diagrams
6 Leads

Across the Line Starting / Run - Delta:

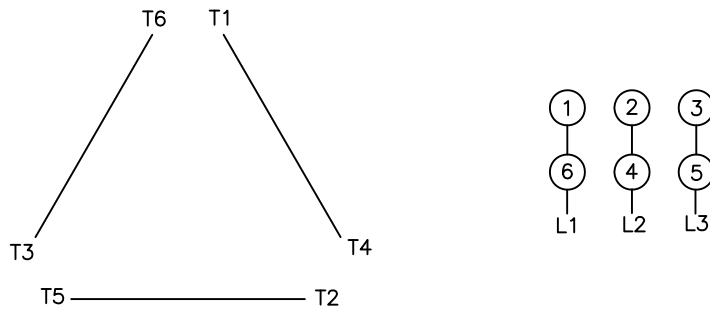

Alternate Starting Connection - Wye:

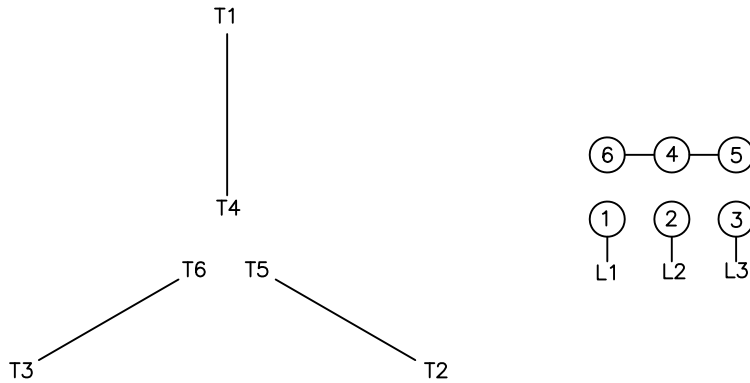

Switch L1 and L2 to reverse rotation