

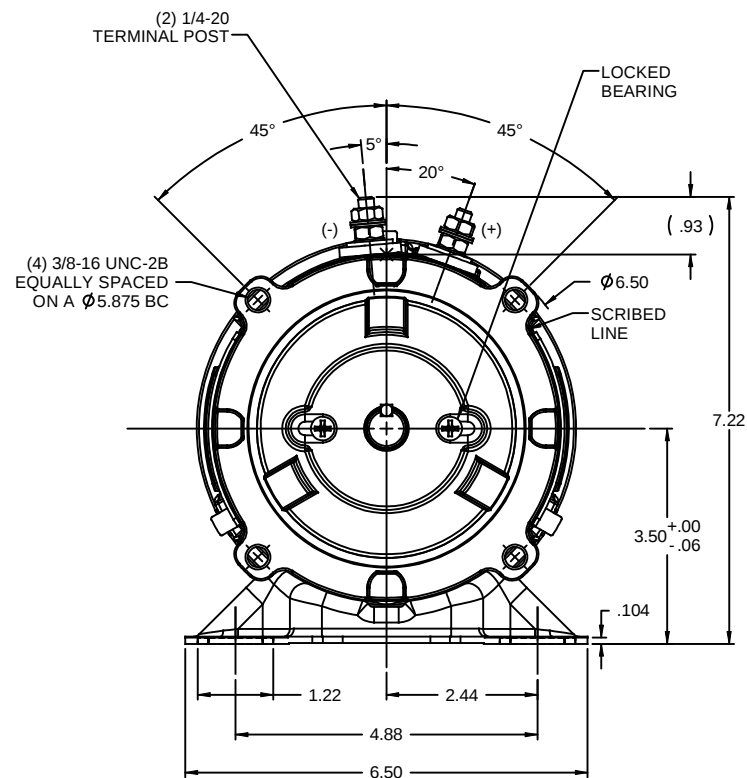


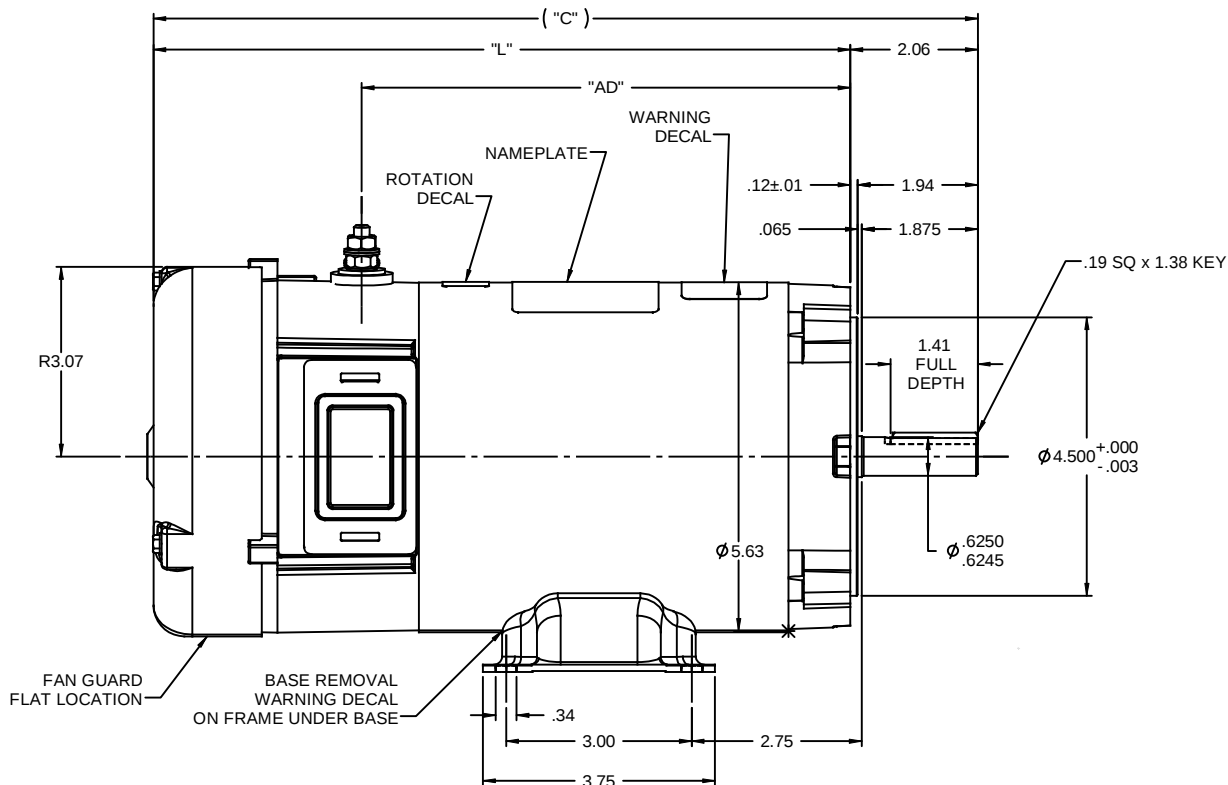

- NOTES:
1) MAXIMUM FACE RUNOUT .004 T.I.R.
2) MAXIMUM PILOT ECCENTRICITY .004 T.I.R.
3) PERMISSIBLE SHAFT RUNOUT .002 T.I.R.
4) GASKETS THROUGHOUT.

056E17F2011	13.82	11.76	8.40	24	1.0	1800
056E17F2008	13.32	11.26	7.90	12	3/4	1800
CATALOG No.	"C"	"L"	"AD"	VOLTS	H.P.	RPM

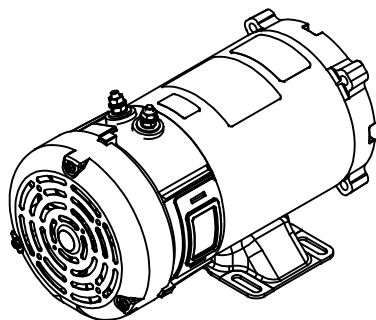

			TOLERANCES UNLESS SPECIFIED:			DRAWN IPG 5/12/08	
			DEC	INCHES		CHK	BC 5/12/08
02	ADDED NOTE ABOUT FAN GUARD FLAT LOCATION. ISAAC 09-4813		IPG 12/9/2009	X	±.1	APPR	
01	ADDED 056E17F2011 CATALOG NO. PER ENGR.		RPB 1/8/2009	BC	xxx ±.03	TITLE OUTLINE	
	RELEASED: REF. 031886 & 031674		IPG 5/19/2008	BC	xxxxx ±.0005	48 FRAME DC	
						MATL	
NO	REVISION		BY & DATE	CHK	ANG ±1/2°	FINISH	PAGE OF
THIRD ANGLE PROJECTION						RFP	PREV
				NETWORK FILE NAME		SIZE B	DRAWING NO 031904
							REV 02