


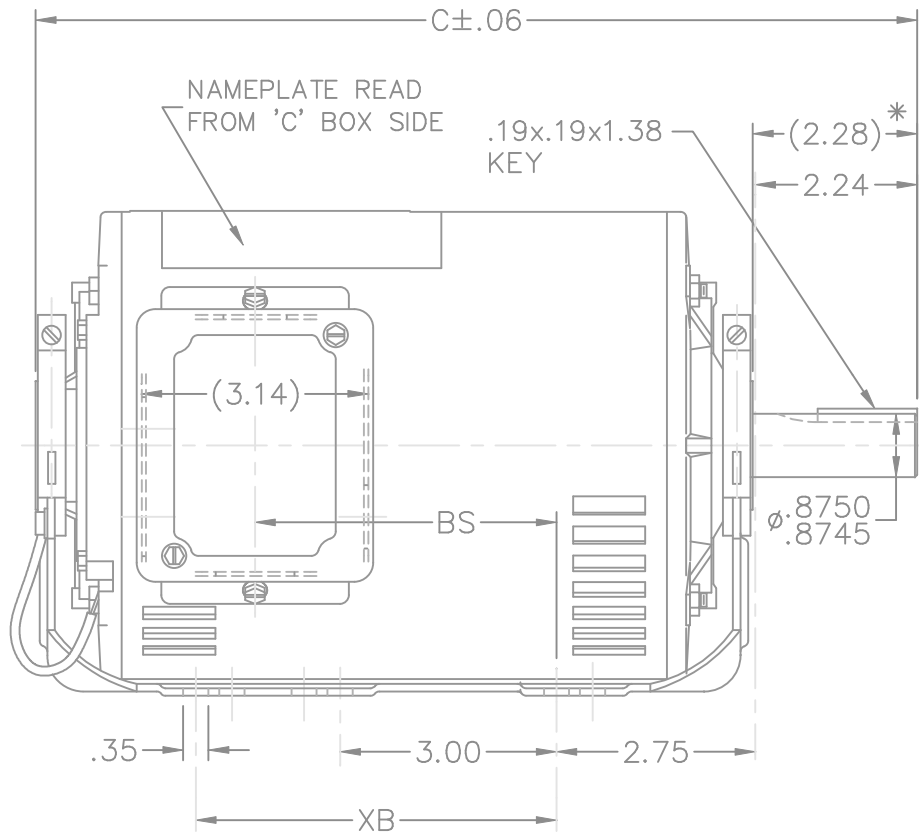

DASH	FRAME	C	XB	BS	DASH	FRAME	C	XB	BS
656	56–65	11.22	0	3.18	856	56–85	13.22	5.00	5.18
706	”–70	11.72	0	3.68	906	”–90	13.72	5.00	5.68
756	”–75	12.22	5.00	4.18					
806	”–80	12.72	5.00	4.68					

* DIMENSION IS FROM RESILIENT RING END CAP TO END OF SHAFT

NOTE:
1. MOTOR MUST BE ROTATED TO .75" STRIP SOCKET CLEARANCE FOR GROUND SCREW, MAXIMUM (10 DEGREES).

				TOLERANCES UNLESS SPECIFIED			DRAWN SMC 02-17-1992			
				DEC.	INCHES		CHK ET 02-17-1992			
4	UPDATED DRAWING	RJW 03-28-2007		.X	±.1		APPD MJ 02-17-1992			
3	REDRAWN IN AUTOCAD	TAT 09-01-2004	ML	.XX	±.03	TITLE OUTLINE 56 FR. – BB – DR.PR. – RESIL. BASE	SCALE 3=8			
2	ADDED NOTE CN 24378	PGK 06-11-1997		.XXX	±.005		REF			
1	NEW DRAWING 3868949	SMC 02-17-1992		.XXXX	±.0005		FMF			
NO.	REVISION	BY & DATE	CHK	ANG	±7'30"	FINISH	PREV			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE 100573	SIZE	DRAWING NO.	PAGE	OF	REV.
			DIST WP			A	100573			4