

CUSTOMER
ORDER No.
SERIAL No.
FRAME SIZE
kW
Hz
VOLTS
BRGS.
MOTOR NETT. WT.
INSULATION CLASS
TEMPERATURE RISE °C
DESIGN AMBIENT TEMPERATURE °C
HEATER WATTS & VOLTS
REMARKS


RPM.
PHASE
POLES
DE.
NDE.
Kg.
°C
°C
WATTS,
VOLTS

ALL DIMENSIONS IN MILLIMETRES

FIRST ANGLE PROJECTION



REVISION:
DATE

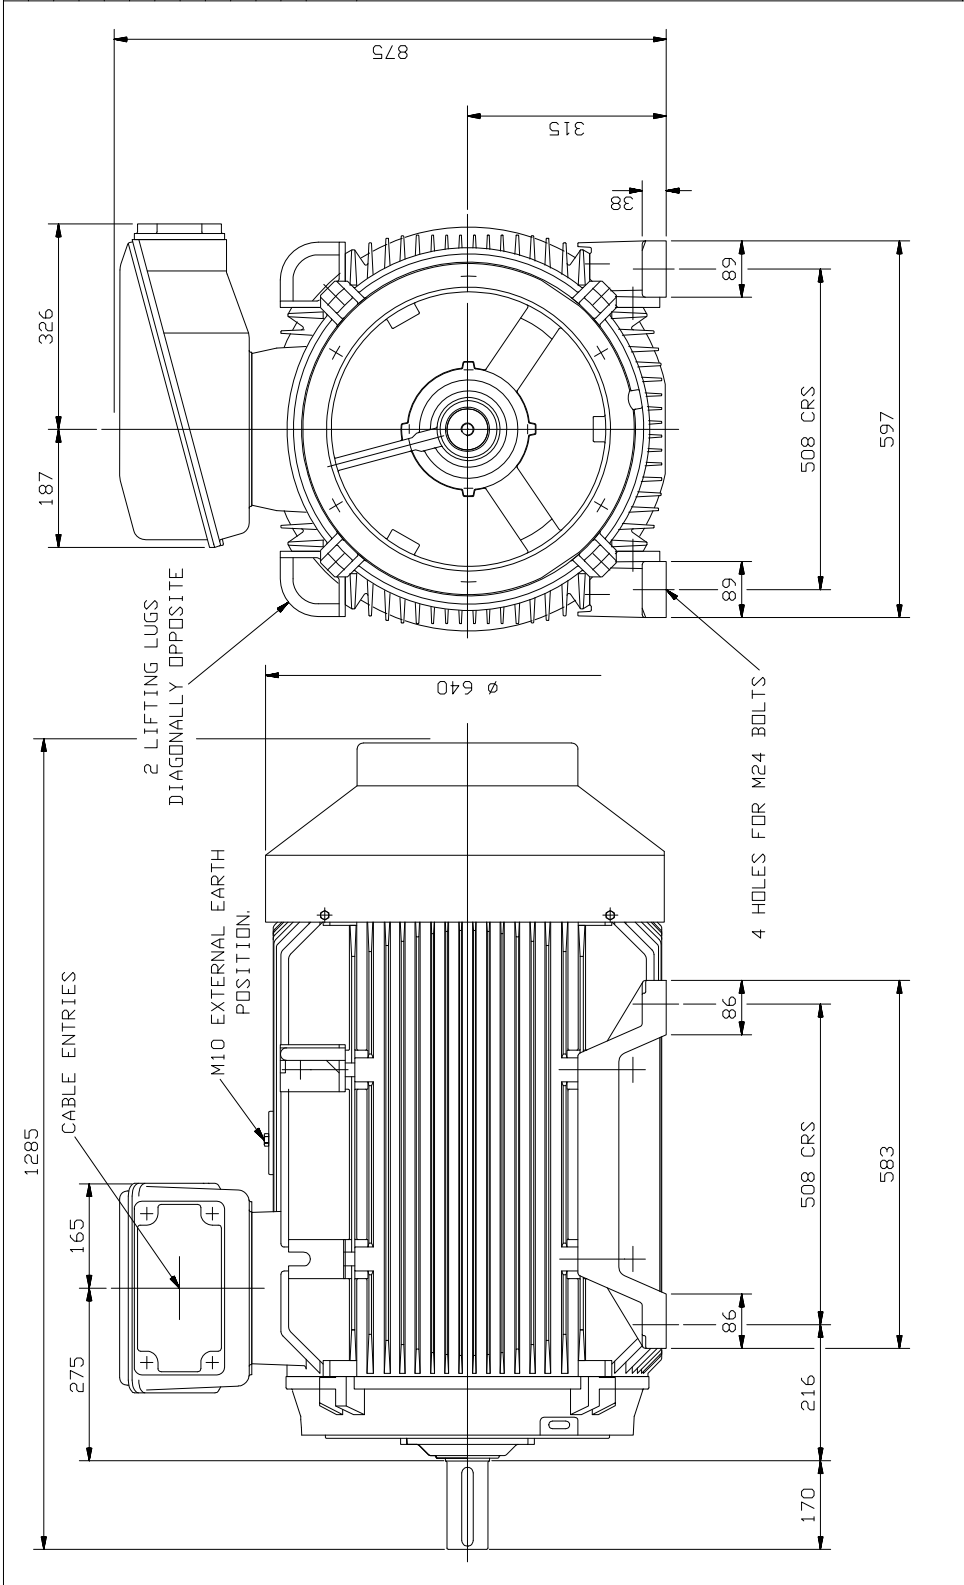

NOTE: -  
 TERMINAL BOX CAN BE SIDE MOUNTED  
 (LEFT OR RIGHT) BY REFITTING FEET  
 90° IN APPROPRIATE DIRECTION.  
 CABLE ENTRY CAN BE SUPPLIED IN  
 ANY ONE OF FOUR POSITIONS AT  
 90° INTERVALS.

DRAWN		
CHECKED		
APPROVED		
OUTLINE DIMENSIONS OF STANDARD FOOT MOUNTED METRIC A. C. MOTOR TOTALLY ENCLOSED FAN VENTILATED. FRAME SIZE : - WP-DF315L (2 POLE)		