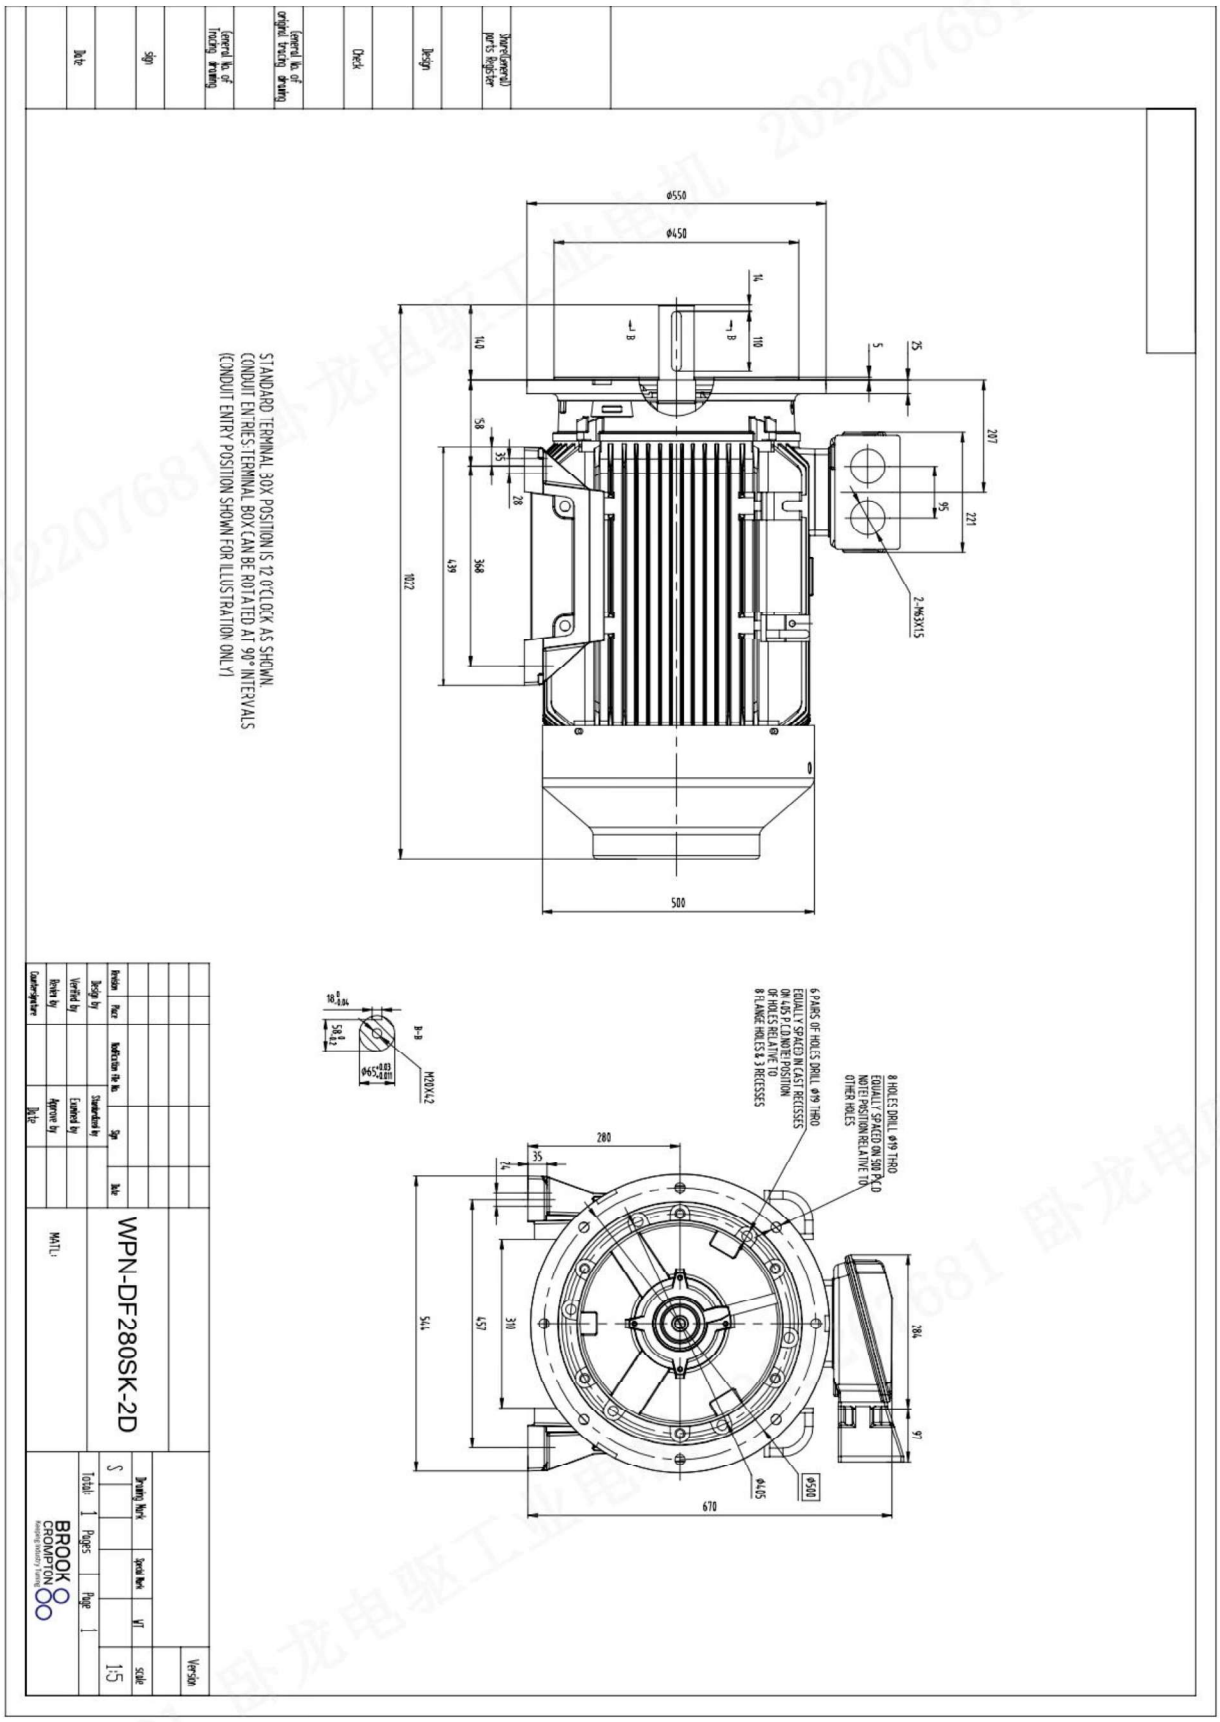
STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
Ø550
Ø450
14
110
25
5
207
221
95
2-M63X1.5
140
58
35
28
368
439
1072
500
8 HOLES DRILL Ø19 THRO
EQUALLY SPACED ON 500 P.C.D
NOTE: POSITION RELATIVE TO
OTHER HOLES
6 PAIRS OF HOLES DRILL Ø19 THRO
EQUALLY SPACED IN CAST RECESSES
ON 445 P.C.D NOTE: POSITION
OF HOLES RELATIVE TO
8 FLANGE HOLES & 3 RECESSES
M20X42
280
35
14
544
457
310
384
97
Ø445
Ø500
670
WPN-DF280SK-2D
BROOK
CROMPTON
Keeping Industry Turning