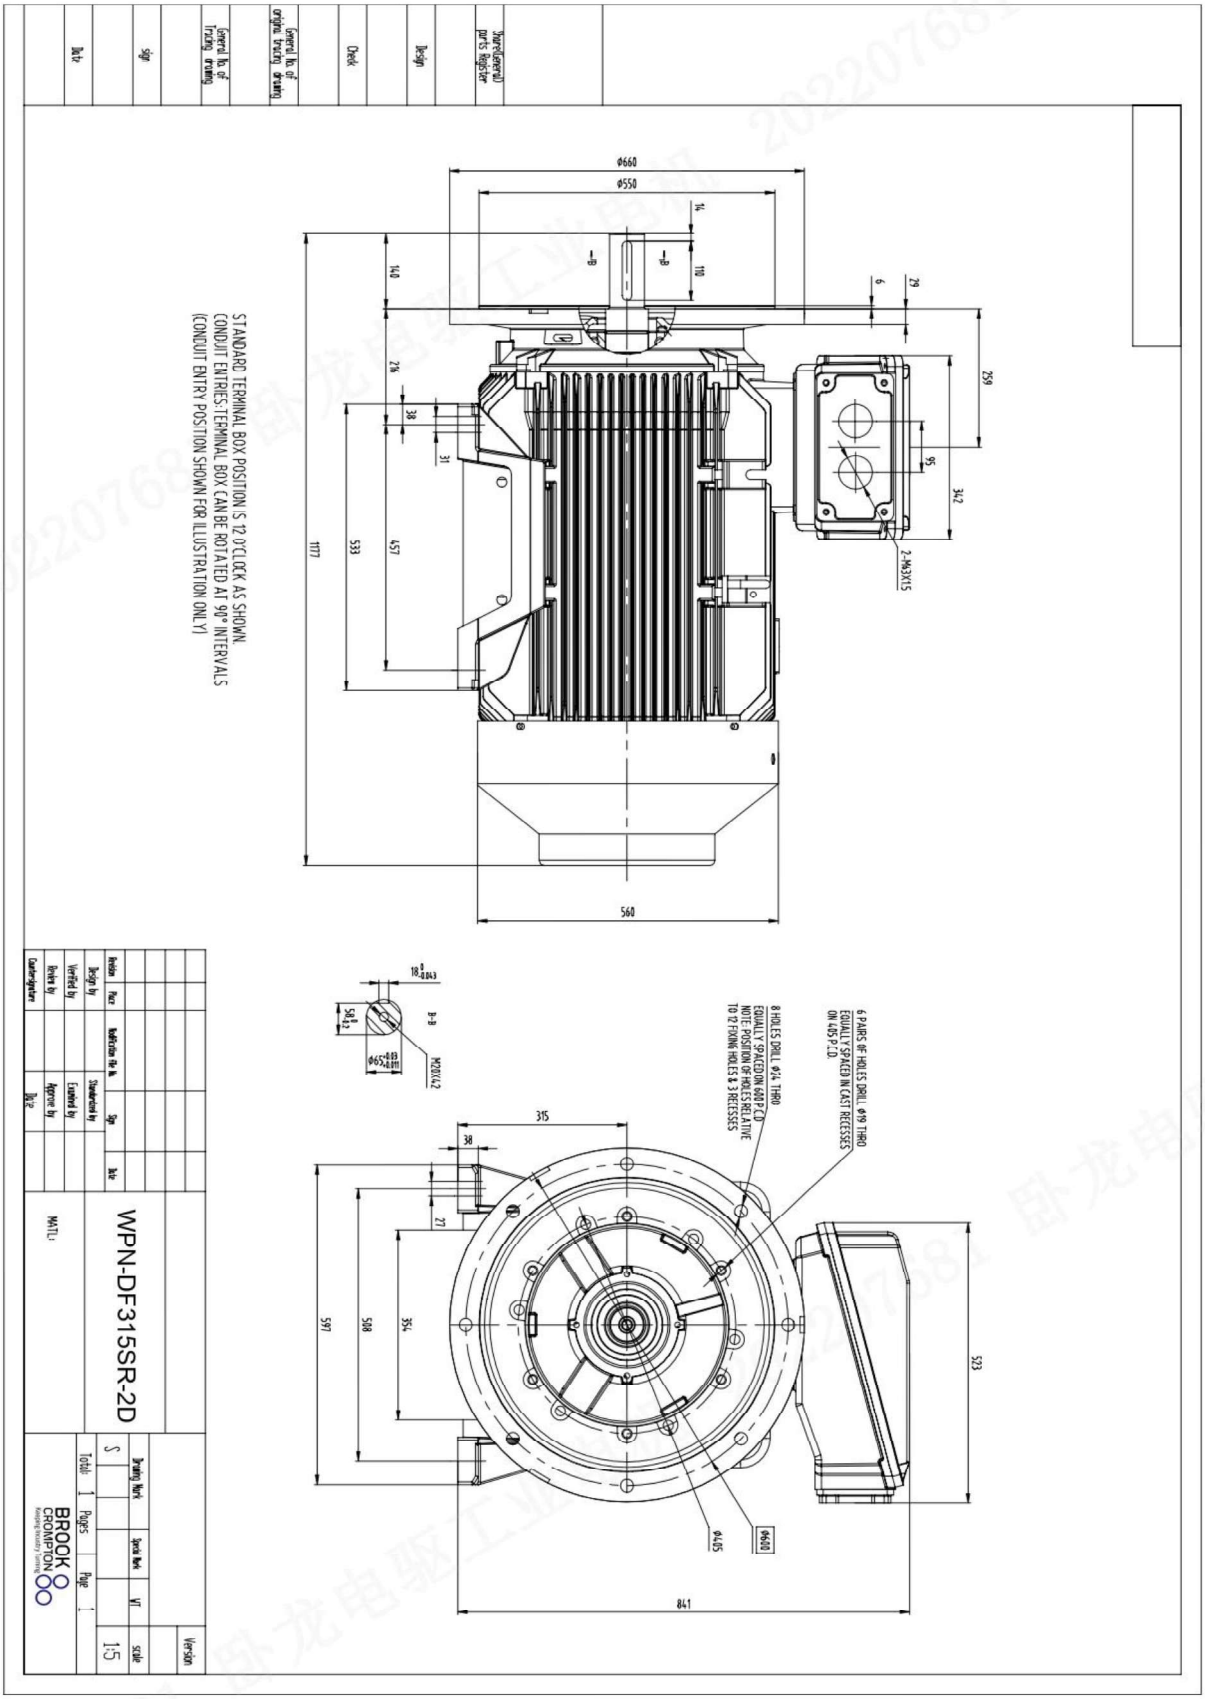
STANDARD TERMINAL BOX POSITION S 12 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
6 PAIRS OF HOLES DRILL Φ19 THRO
EQUALLY SPACED IN CAST RECESSES
ON 405 P.C.D
8 HOLES DRILL Φ14 THRO
EQUALLY SPACED ON 600 P.C.D
NOTE: POSITION OF HOLES RELATIVE
TO 12 FIXING HOLES & 3 RECESSES
Φ660
Φ550
560
841
523
315
597
508
354
1177
533
457
259
342
95
2-M63X15
Φ405
Φ600
M20X1.42
WPN-DF315SR-2D
Version
scale
15
Drawing Mark
Specia Mark
VIT
Totals
Pages
Page
BROOK CROMPTON
Keeping Industry Turning