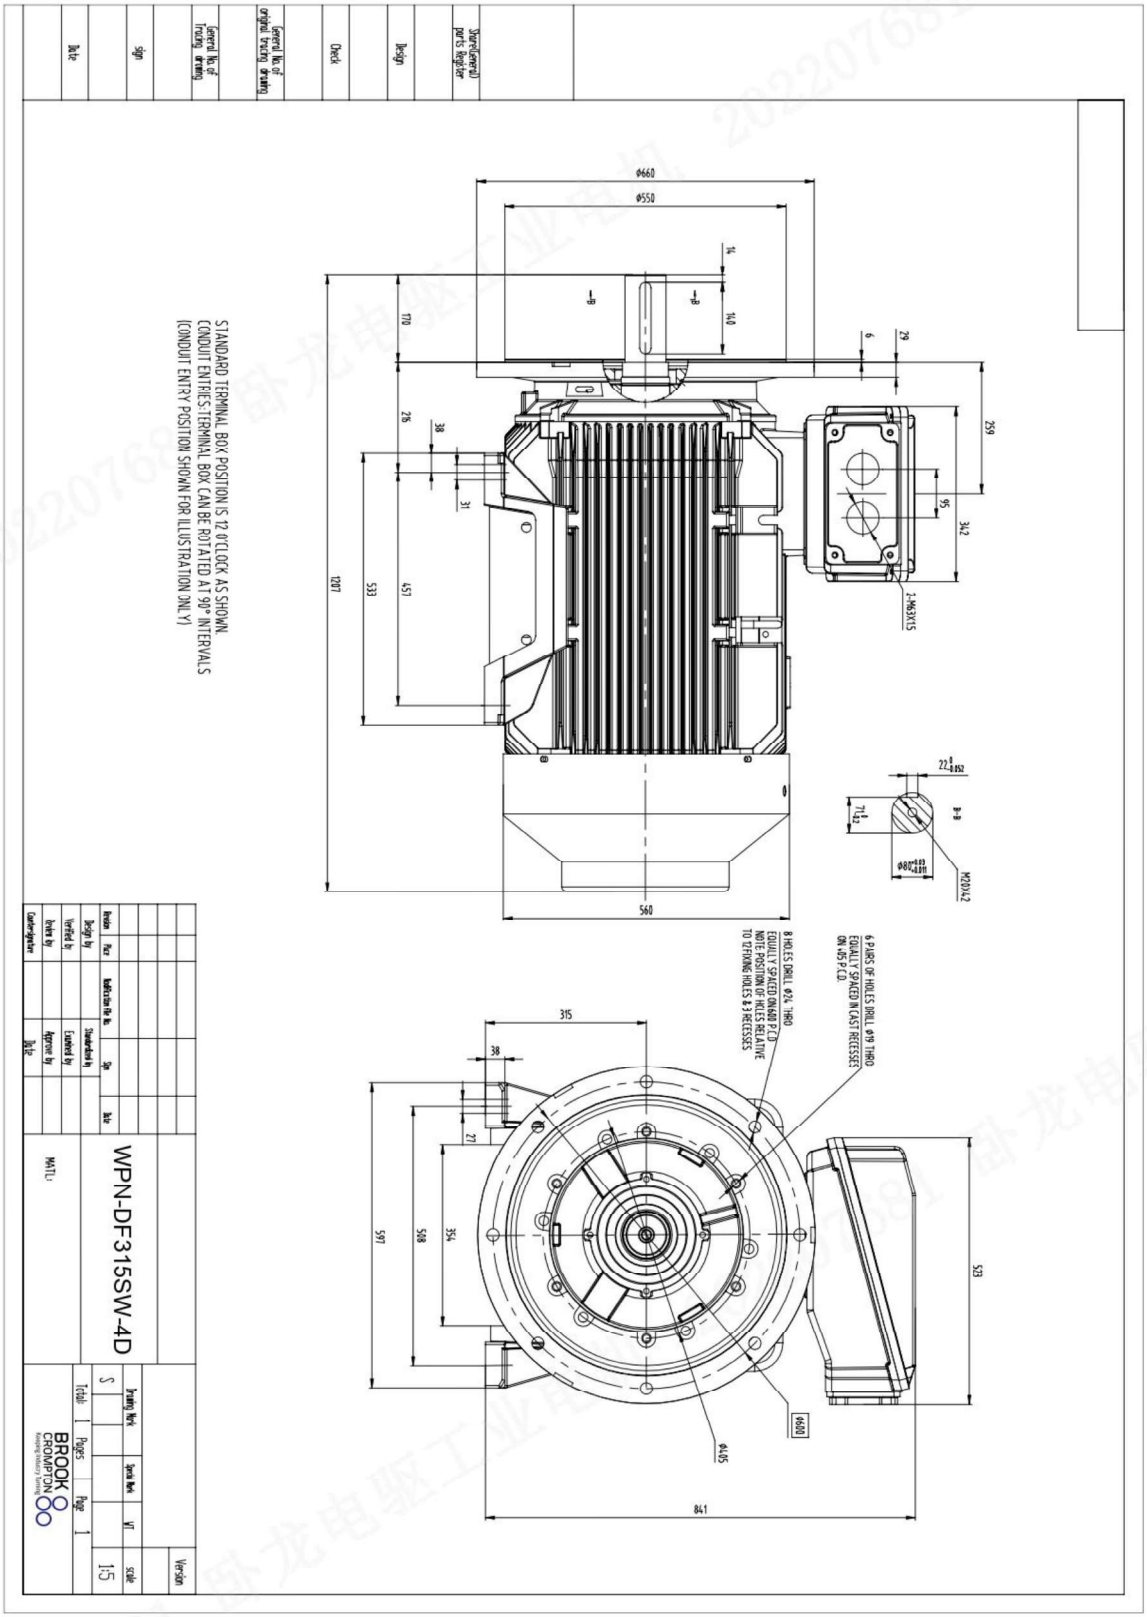
STANDARD TERMINAL BOX POSITION IS 12 O'CLOCK AS SHOWN.
CONDUIT ENTRIES-TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
Ø660
Ø550
14
14.0
170
276
38
31
533
457
1207
560
29
6
259
95
342
2-M63X115
22.4 0.052
71.4 0.2
Ø80 +0.03 -0.019
M20X1.42
B-B
6 PAIRS OF HOLES DRILL Ø19 THRO
EQUALLY SPACED ON LAST RECESSES
ON Ø5 P.C.D.
8 HOLES DRILL Ø24 THRO
EQUALLY SPACED ON Ø480 P.C.D
NOTE: POSITION OF HOLES RELATIVE
TO 12 FIXING HOLES & 3 RECESSES
315
38
27
597
508
354
523
841
Ø405
Ø600
WPN-DF315SW-4D
M4TL-
BROOK CROMPTON
Keeping Industry Turning
Version
scale
1:5
Page 1
Pages
Total
S