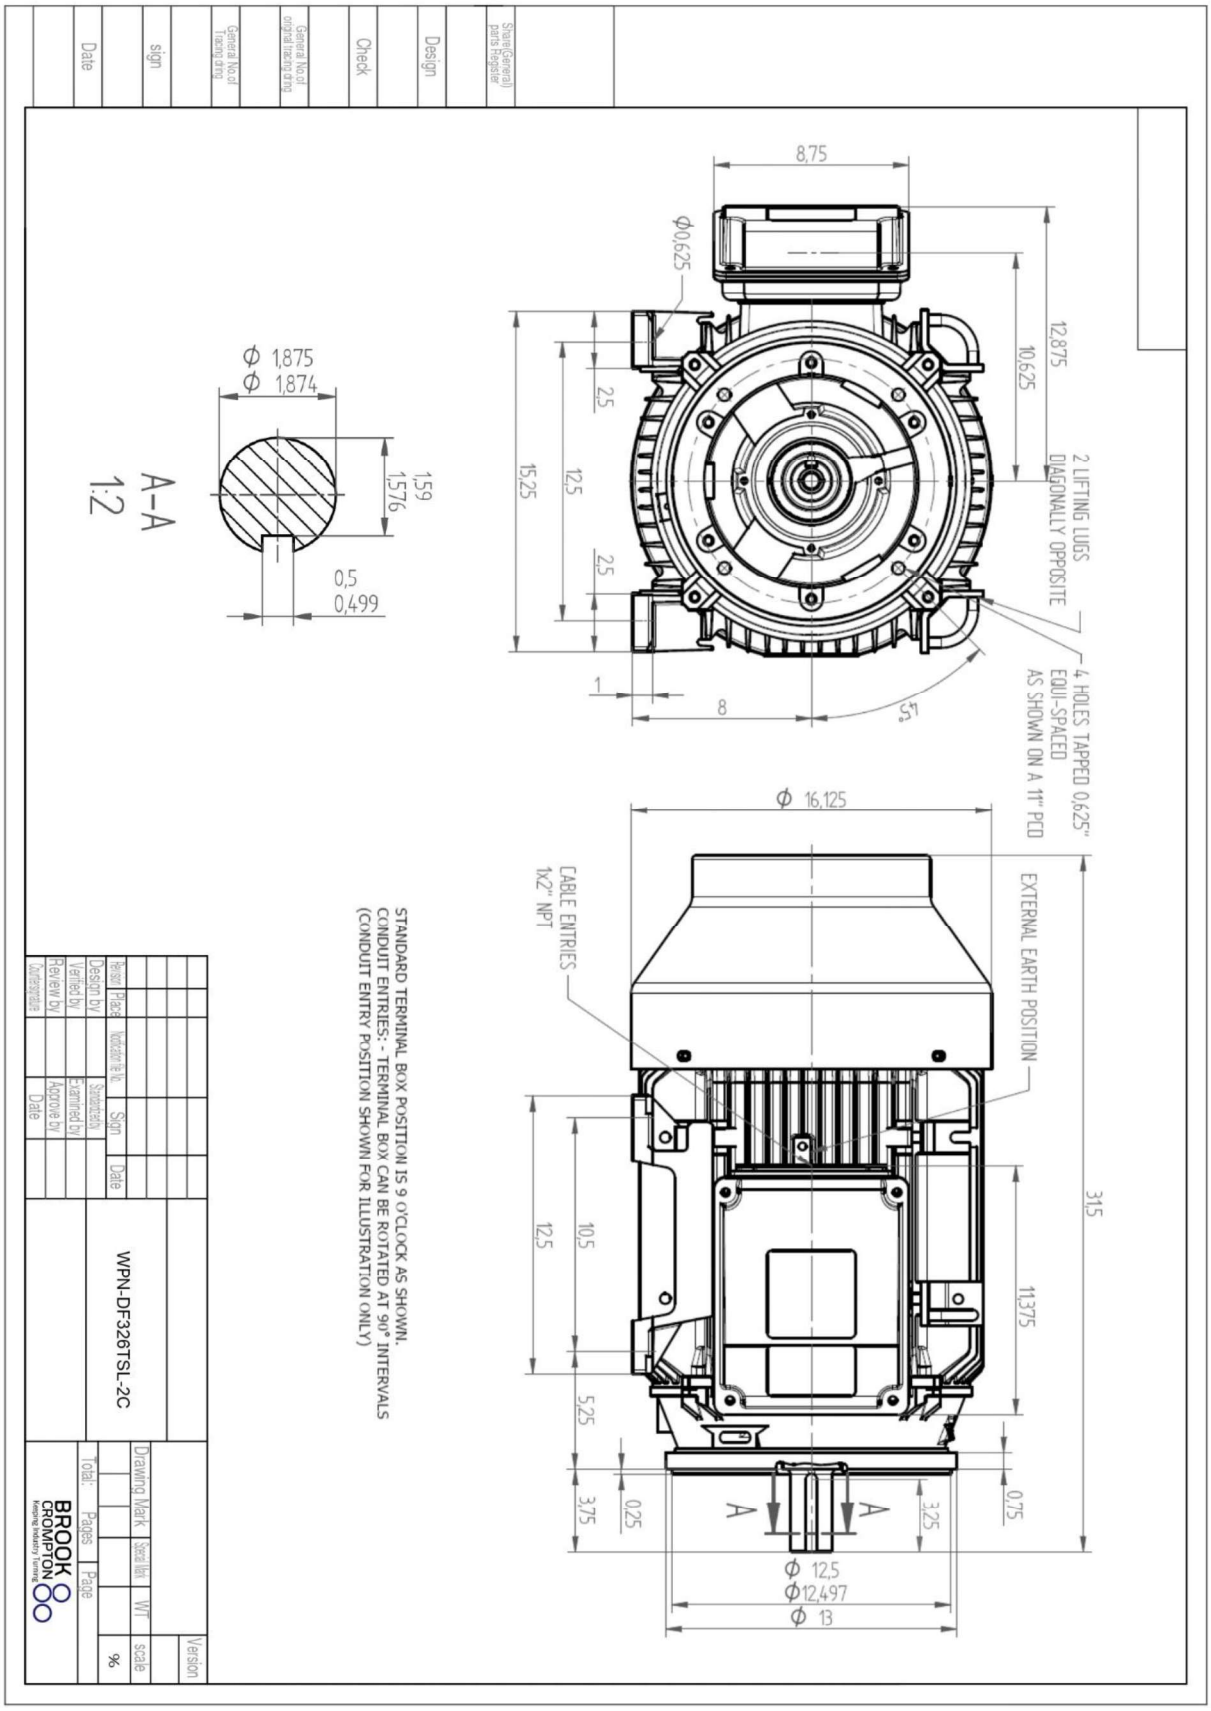
8,75
Φ0,625
12,875
10,625
2,5
15,25
12,5
2,5
1
8
45°
2 LIFTING LUGS
DIAGONALLY OPPOSITE
4 HOLES TAPPED 0,625"
EQUI-SPACED
AS SHOWN ON A 11" PCD
Φ 1,875
Φ 1,874
1,59
1,576
0,5
0,499
A–A
1:2
Φ 16,125
CABLE ENTRIES
1x2" NPT
EXTERNAL EARTH POSITION
31,5
11,375
12,5
10,5
5,25
3,75
0,25
3,25
0,75
A
A
Φ 12,5
Φ12,497
Φ 13
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
WPN-DF326TSL-2C
BROOK CROMPTON
Keeping Industry Turning