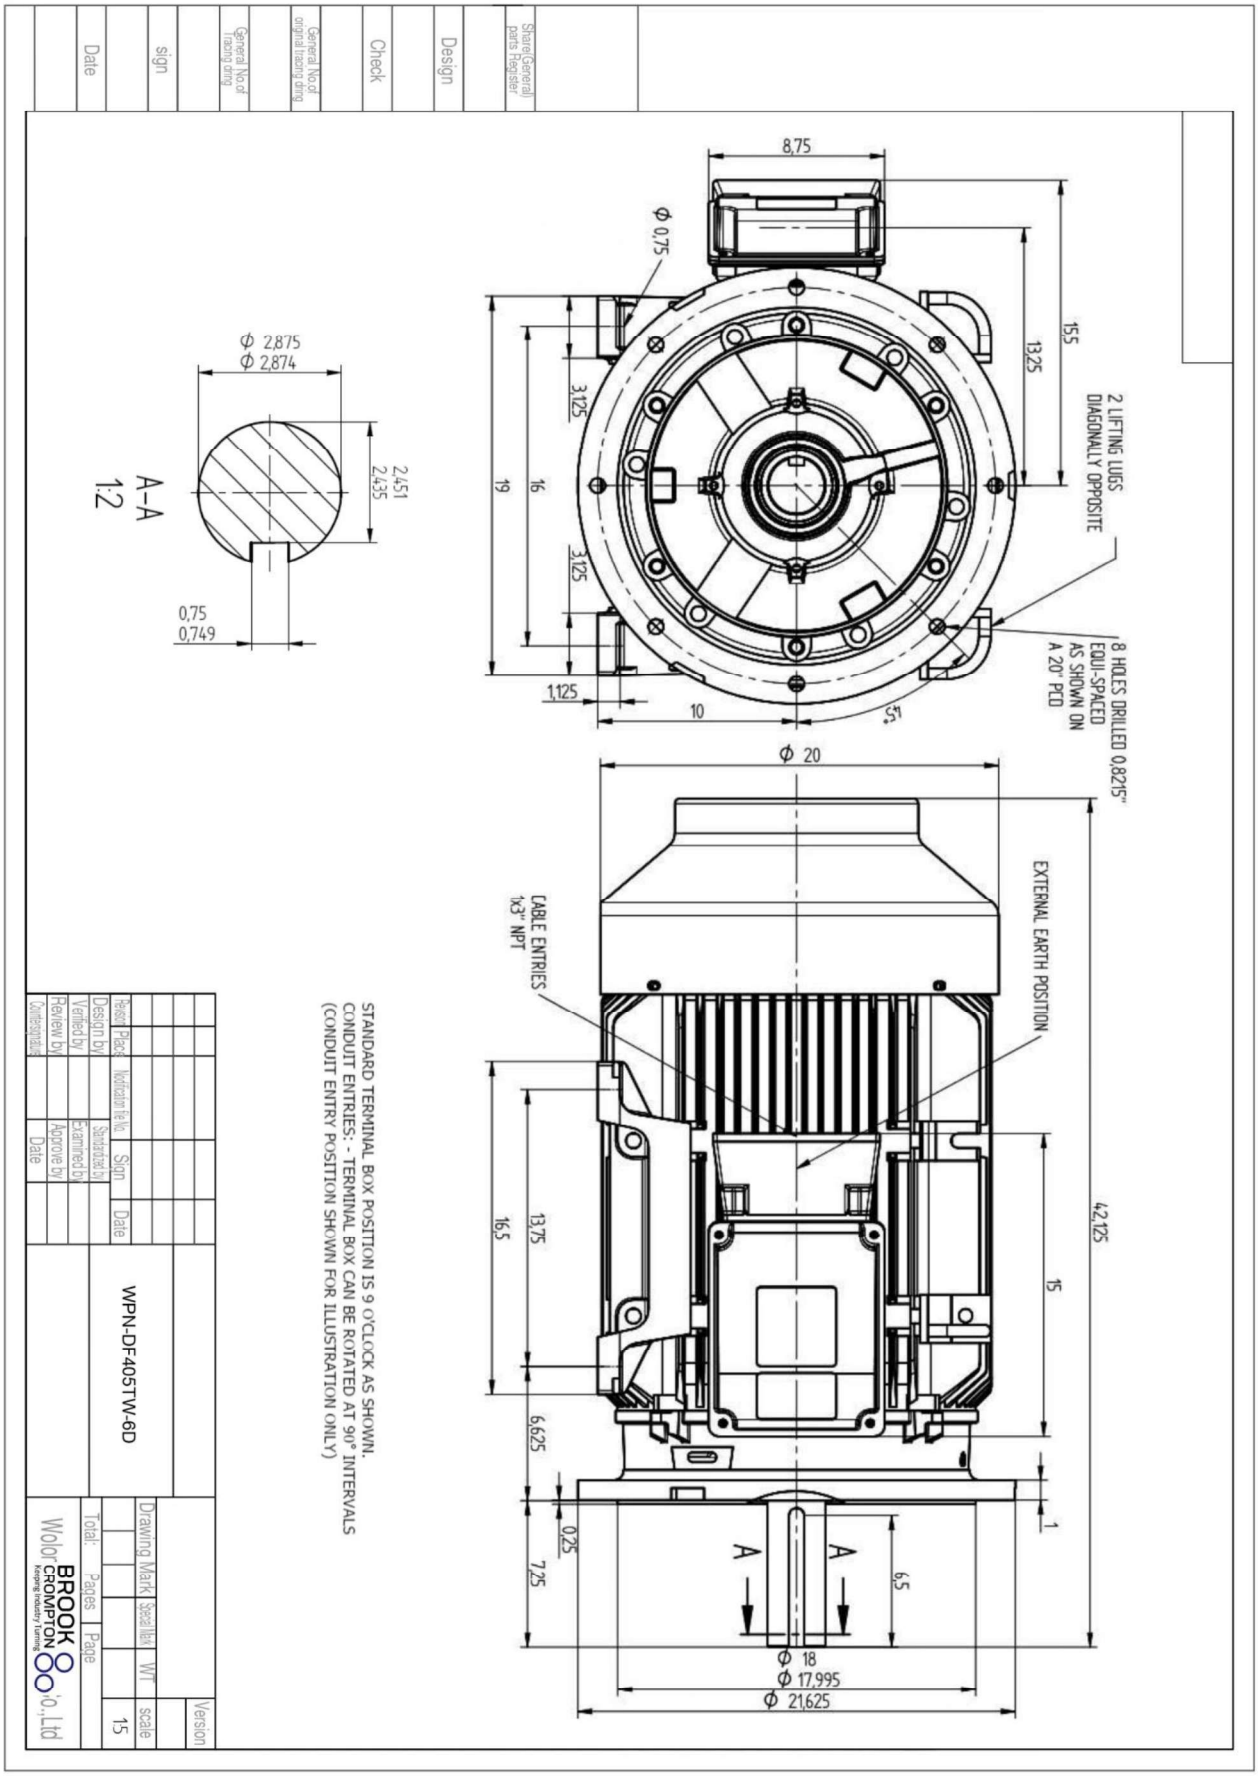
8,75
Φ 0,75
155
13,25
3,125
19
16
3,125
1,125
10
2 LIFTING LUGS DIAGONALLY OPPOSITE
8 HOLES DRILLED 0.8215" EQUI-SPACED AS SHOWN ON A 20" PCD
Φ 2,875
Φ 2,874
2,451
2,435
A–A
1:2
0,75
0,749
Φ 20
CABLE ENTRIES 1x3" NPT
EXTERNAL EARTH POSITION
42,125
16,5
13,75
15
6,625
0,25
7,25
6,5
1
A
A
Φ 18
Φ 17,995
Φ 21,625
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
WPN-DF405TW-6D
BROOK CROMPTON
Keeping Industry Turning