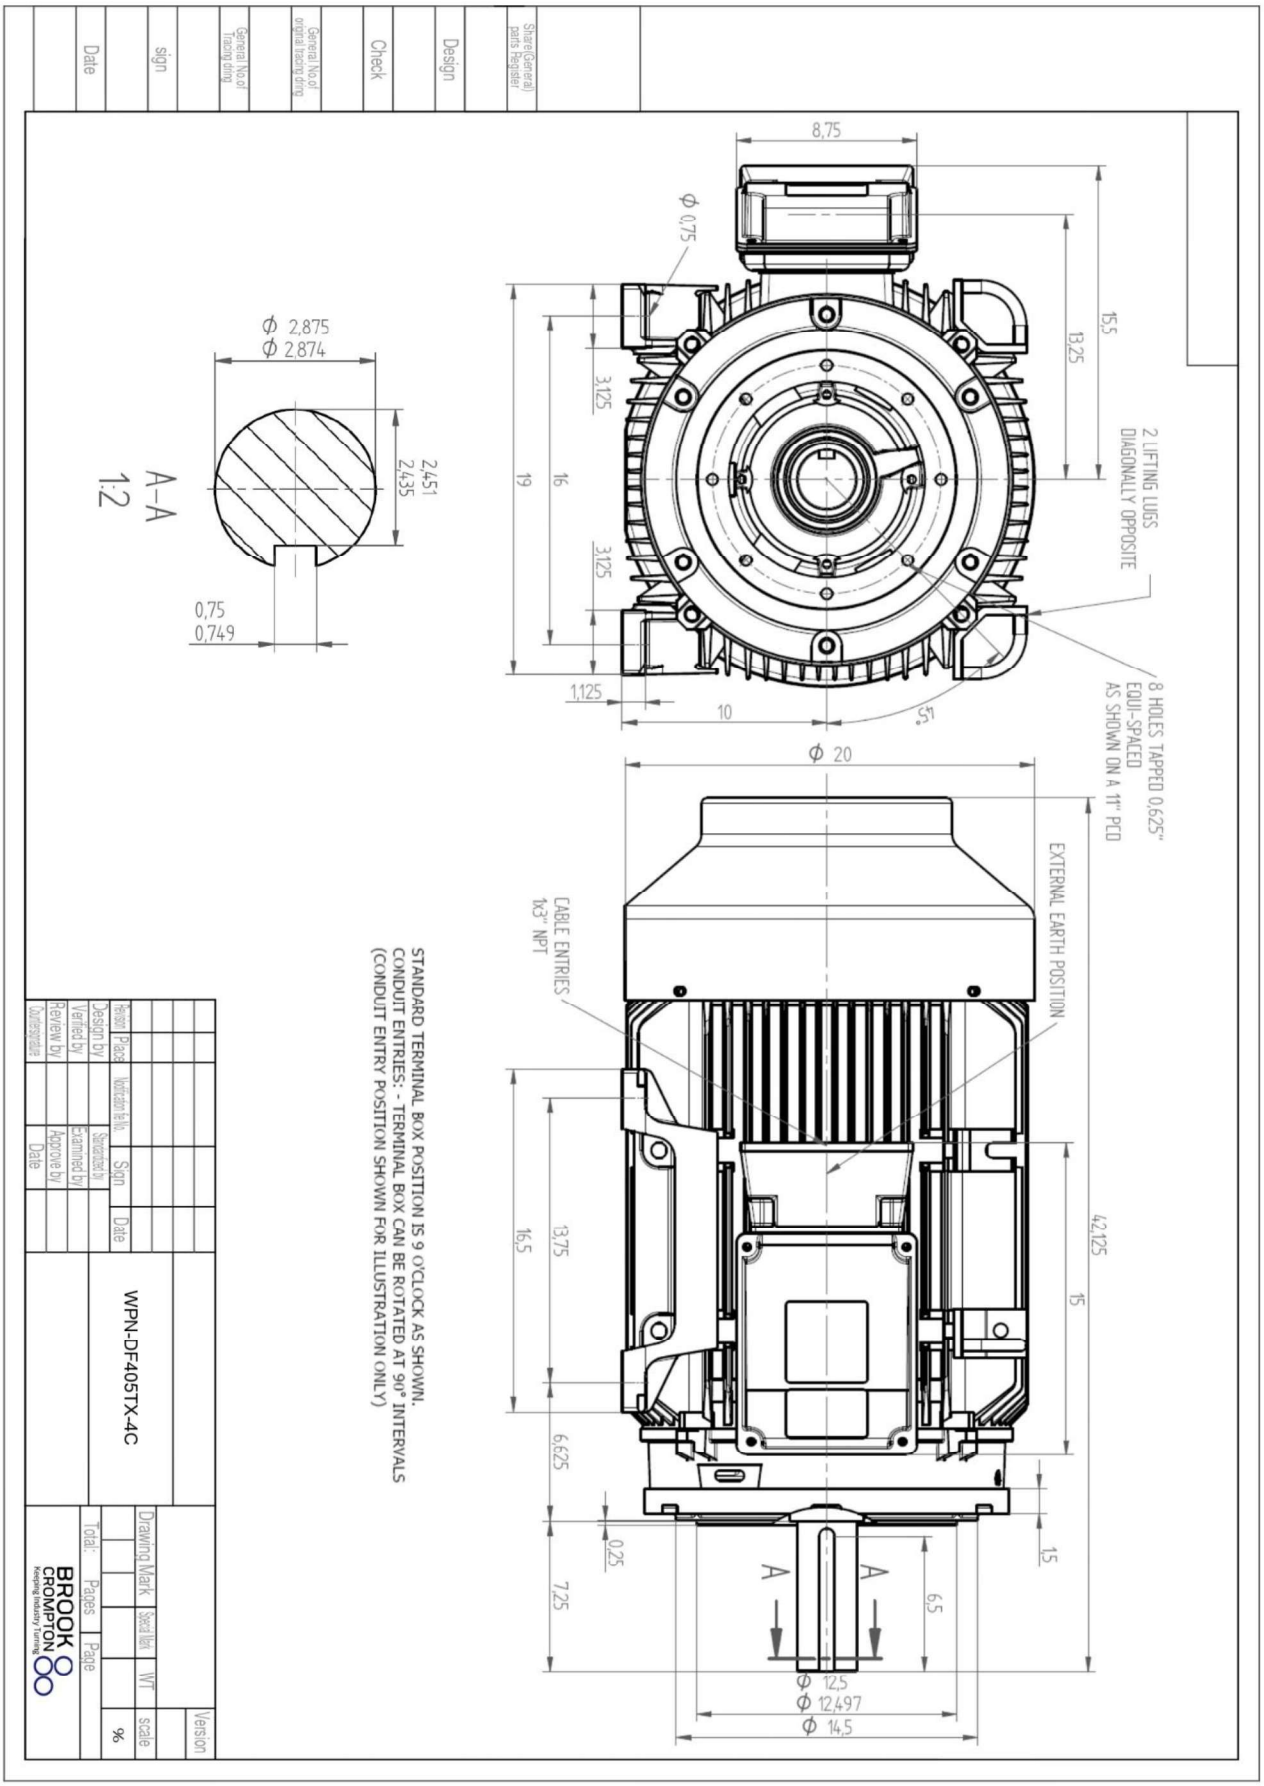
8,75
Φ 0,75
15,5
13,25
2 LIFTING LUGS
DIAGONALLY OPPOSITE
3,125
19
16
3,125
1,125
10
8 HOLES TAPPED 0,625"
EQUI-SPACED
AS SHOWN ON A 11" PCD
Φ 2,875
Φ 2,874
2,451
2,435
A–A
1:2
0,75
0,749
Φ 20
EXTERNAL EARTH POSITION
CABLE ENTRIES
1x3" NPT
STANDARD TERMINAL BOX POSITION IS 9 O'CLOCK AS SHOWN.
CONDUIT ENTRIES: - TERMINAL BOX CAN BE ROTATED AT 90° INTERVALS
(CONDUIT ENTRY POSITION SHOWN FOR ILLUSTRATION ONLY)
16,5
13,75
6,625
7,25
0,25
42,125
15
1,5
6,5
A
A
Φ 12,5
Φ 12,497
Φ 14,5
WPN-DF405TX-4C
BROOK CROMPTON
Keeping Industry Turning